

Leading the Way with Intelligent Motion Control

STEPPER PRODUCTS CATALOGUE

OPEN LOOP STEPPER

CLOSED LOOP STEPPER

BUS STEPPER



Shenzhen Rtelligent Technology Co.,Ltd

+86(0)755- 27440012 / +86(0)755-27440023

info@rtelligent.cn / info@szrutech.com

website : www.rtelligentglobal.com

5F,Building A,Rtelligent Technology Park,Xingyu Road,Xixiang,Bao'an District,Shenzhen,China

Shenzhen Rtelligent Technology Co.,Ltd

Leading the Way with Intelligent Motion Control

COMPANY PROFILE



Management Idea

Strive for innovation and excellence

Talent Concept

Great virtue promotes growth, put people first

Quality Policy

Customer first, quality first, full participation, the pursuit of excellence



Shenzhen Rtelligent Technology Co., Ltd. located in Shenzhen, China, is a national high-tech enterprise dedicated in R & D, marketing and sales of high performance motiion control products, the company gathered a large number of graduates from well-known engineering high-tech motion control senior practitioners, and actively cooperate with major scientific research institutes and universities, In the servo, stepper, motion control card, PLC and other fields continue to deepen, committed to creating an excellent national brand, we always continues to be deeply committed to the fielf of automation, seek to better understand our customer's needs and develop intelligent products and solutions to create values for customers around the word,

Founded in **2015**

2 Major production bases

30+ Offices in China

60+ Core Technology Patents

70+ Sales Countries And Regions

100+ Distributors

10000+ Sales Customers

5million+ Stepper Servo Sales Volume

P5
P6

Fieldbus Stepper System
Filedbus Stepper Drive



P19
P20
P26

Closed Loop Stepper System
Closed Loop Stepper Drive
Closed Loop Stepper Motor



Cable Accessory

Common Model Quick Selection Table

CONTENTS



Open Loop Stepper System
Open Loop Stepper Drive
Switch Stepper Drive
Multi-axis Stepper Drive
Open Loop Stepper Motor

P33
P34
P47
P49
P55



Reducer for Stepper Motor



Five-phase Stepper System

Linear Stepper Motor



Stepper Products Portfolio



STEPPER SYSTEM

Leading the Way with Intelligent Motion Control

EtherCAT

CANopen

Modbus




Intelligent

Fieldbus Stepper System

The control method of the traditional stepper motor is that the drive receives pulses to control the operation of the motor. At present, for some applications with high requirements, the pulse type control method can no longer meet the demand, and the fieldbus type control is required.

Compared with the pulse type, the fieldbus type is not only much easier in wiring, but also relatively simple to write the control program. Moreover, it can also monitor the running state of the motor and change the motor current and micro-stepping at any time, and simple control of acceleration and deceleration, analogue synchronous command, offline control, etc.

Block Diagram

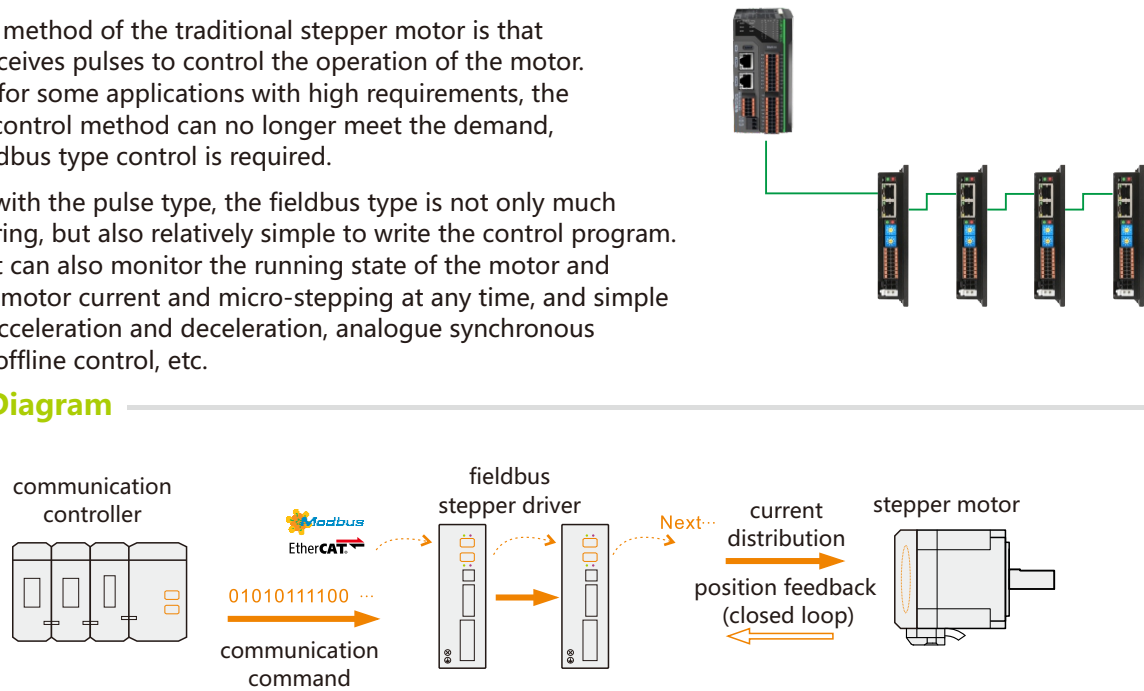

Features

Various communication modes

Includes a variety of fieldbus communication methods, which are suitable for various applications.

More flexible control



The fieldbus realizes the distributed control, and for the distributed control system, the fieldbus is an indispensable part.

Stronger anti-interference ability

Since the fieldbus control method adopts digital serial communication method and the cable adopts shielded twisted pair, it has stronger anti-interference ability than the traditional discrete control method.


More accurate and reliable

Due to the intelligence and digitization of fieldbus devices, compared with traditional discrete control systems, the accuracy of measurement and control is fundamentally improved, and transmission errors are reduced. At the same time, due to the simplified structure of the system, the connection cables of the equipment are reduced, and the working reliability of the system is improved.

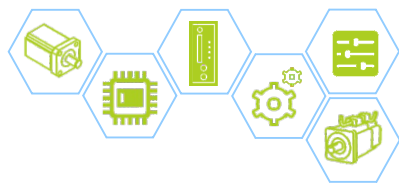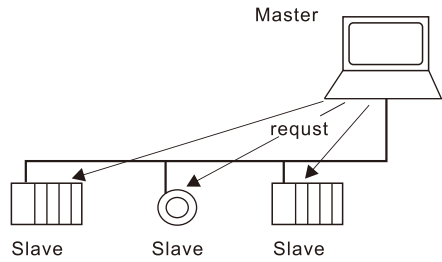

Fieldbus Stepper Drive

Our fieldbus series high-performance stepper drive has better design and stability, supports 485, EtherCAT, Modbus TCP, CANopen and other fieldbus communication methods, can be connected to multi-axis networking, and is easy to use.

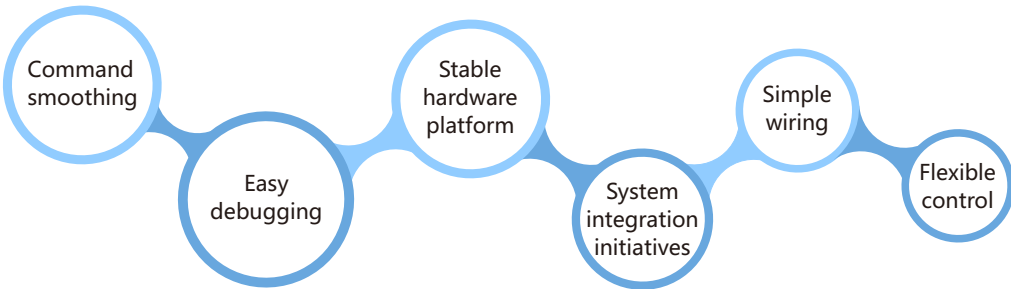

Naming Rule

EC

1

T

2

60

3

-

4

1

Fieldbus type

N: 485 communication

EC: EtherCAT communication

2

Series code

R: open loop

T: closed loop

3

Matching motor frame size

4

Non-standard code

*Model naming rules are only used for model meaning analysis. For specific optional models, please refer to the details page.

Product Series

Modbus RTU NT Series

- Matching motor frame below 86mm
- Integrated motion controller function
- Built-in T-shaped acceleration and deceleration command
- Support various internal homing
- Communication control/pulse control/switch control

Modbus TCP EP Series

- Matching motor frame below 60mm
- Integrated motion controller function
- Built-in T-shaped
- Support various internal homing
- Compatible with 10M/100Mbps network interface

EtherCAT EC Series

- Matching motor frame below 86mm
- Comply with CiA402 specification
- CSP/CSV/HM/PP/PV
- Support various internal homing
- The minimum synchronization period in CSP mode is 500us

■ 485 Communication Type Stepper Drive

■ Modbus RTU Rotocol Overview

Schematic

Modbus broadcast mode block diagram

Command format


Command format:
Slave address + function code + data + CRC check

Function code:
0X03 Read holding register
0X06 Write a single register
0X10 Write multiple registers


Features

- Broadcast mode
- One master multiple slaves
- Host query and slave response
- Slaves have no priority arbitration rights
- Simple hardware
- Reliable serial communication

■ Networking Diagram

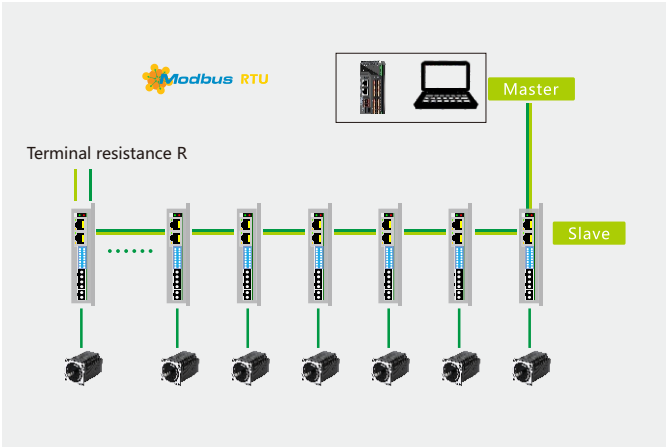

■ Two-wire Half-duplex Wiring Diagram

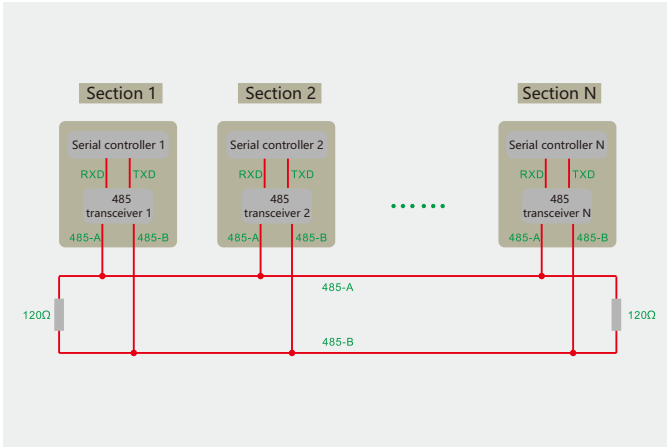

■ Technical Specifications

Model	Peak current A	Weight kg	Power voltage	Dimensions mm	Communication mode	Maximum baud rate	Matching motor
NT60	6	0.3	18-50VDC	118×76×33	485	115200	Open loop or closed loop below 60mm
NT86	8	0.6	18-80VAC	151×97×52	485	115200	Open loop or closed loop below 86mm

■ LED Indication

LED status	Drive status	Fault handling
● Steady green light	Drive not enabled	
●● Flashing green light	Drive works fine	
●● 1 green 1 red	Drive overcurrent	Check wiring、repair drive
●●● 1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
●●●● 1 green 3 red	Drive internal voltage error	Drive failure
●●●●● 1 green 4 red	Encoder out-of-tolerance alarm	
●●●●●● 1 green 5 red	Encoder phase error	
●●●●●●● 1 green 6 red	Parameter storage error	

■ NT Series Application



■ PLC Master Station + NT Drive Slave Station — ■ Touch Screen Master + NT Drive Slave

Master+Slave: PLC+NT drive

Convenient networking
PLC with 485 communication
Support up to 31 slave stations
Optional touch screen for slave station, quick interaction

Master+Slave: Touch screen+NT driver

Convenient networking
Streamline cost control
Commonly used macro instruction programming mode
For simple logic loop control



■ NT Series Drive Automatic Programming Mode

Drive automatic programming mode

No networking required
Use the internal integrated motion control instructions
With external IO control
Fixed speed/positioning/multi-stage position/
auto-homing etc.

Origin input
Homing start
Forward input
Reverse input
Position selection

In-place signal
Torque arrival
Limit output

Autonomous programming

■ Function in Self-programming Mode

IO positioning operation

IO forward and revers
One or more target position
Support torque homing

IO torque mode

IO forward and reverse
Target torque switching
Support torque homing

IO speed control operation

IO forward and reverse
One or more target position

IO torque mode

IO forward and reverse
Target torque and position switching
Support torque homing


NT60

485 fieldbus stepper drive NT60 is based on RS-485 network to run Modbus RTU protocol. The intelligent motion control function is integrated, and with external IO control, it can complete functions such as fixed position/fixed speed/multi-position/auto-homing.

NT60 matches open loop or closed loop stepper motors below 60mm.

- Control mode: fixed length/fixed speed/homing/multi-speed/multi-position
- Debugging software: RTConfigurator (multiplexed RS485 interface)
- Power voltage: 24-50V DC
- Typical applications: single axis electric cylinder, assembly line, connection table, multi-axis positioning platform, etc


Drive Interface & Connection

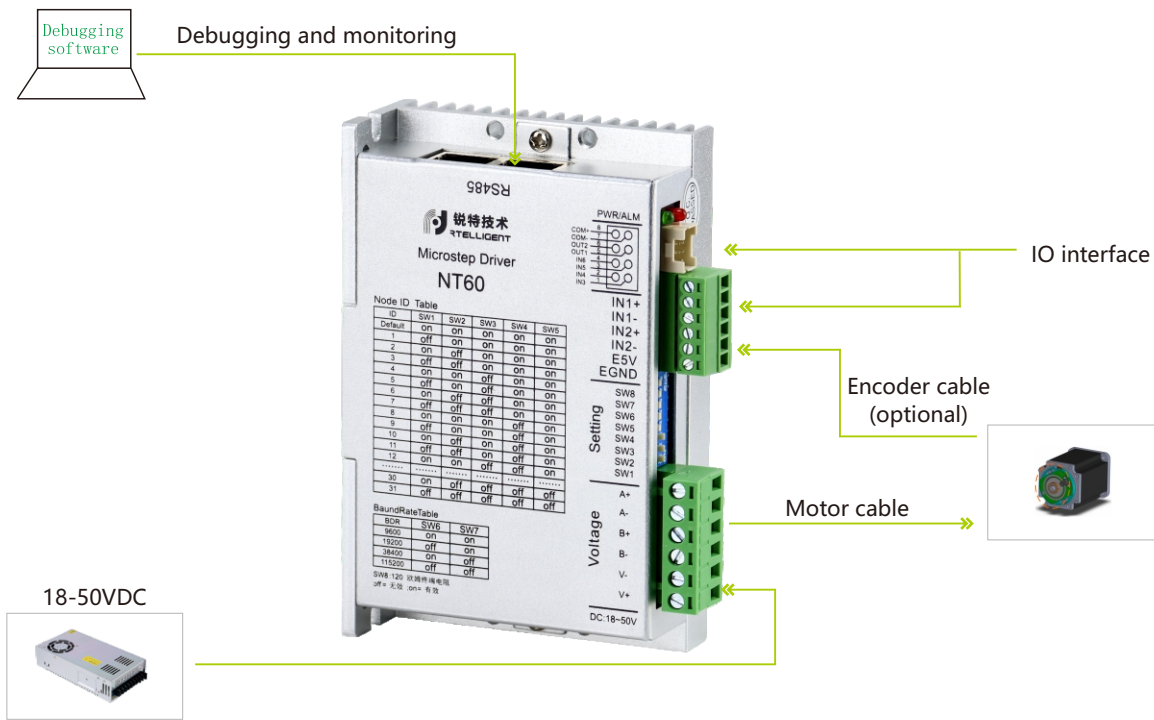

Function Setting

ID setting		
on=0,off=1		
ID=sw1+sw2*2+sw3*4+sw4*8+sw5*16		
Ensure the ID number is set correctly before powering on		
Baud rate setting		
BDR	SW6	SW7
9600	on	on
19200	off	on
38400	on	off
115200	off	off
The baud rate of the slave station must correspond to the baud rate set by the master station		
When adjusting the dial code,it is necessary to power off and restart the drive to take effect.		
Input interface		
Input 1	IN1+ IN1-	Differential input or encoder input interface
Input 2	IN2+ IN2-	
Input 3	IN3	Single-ended common anode input
Input 4	IN4	
Input 5	IN5	
Input 6	IN6	Common input
	COM+	
Output interface		
Output 1	OUT1	
Output 2	OUT2	
	COM-	Common output

Installation Dimension

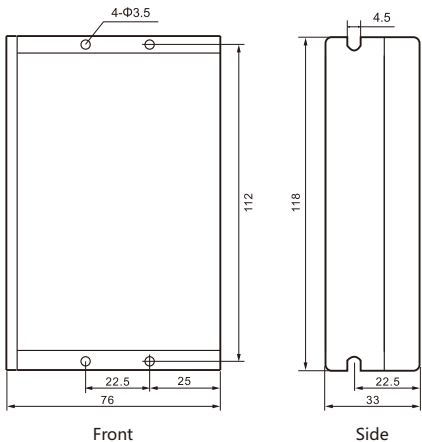


NT86

485 fieldbus stepper drive NT60 is based on RS-485 network to run Modbus RTU protocol. The intelligent motion control function is integrated, and with external IO control, it can complete functions such as fixed position/fixed speed/multi-position/auto-homing.

NT86 matches open loop or closed loop stepper motors below 86mm.

- Control mode: fixed length/fixed speed/homing/multi-speed/multi-position/potentiometer speed regulation
- Debugging software: RTConfigurator (multiplexed RS485 interface)
- Power voltage: 18-110VDC, 18-80VAC
- Typical applications: single axis electric cylinder, assembly line, multi-axis positioning platform, etc


Drive Interface & Connection

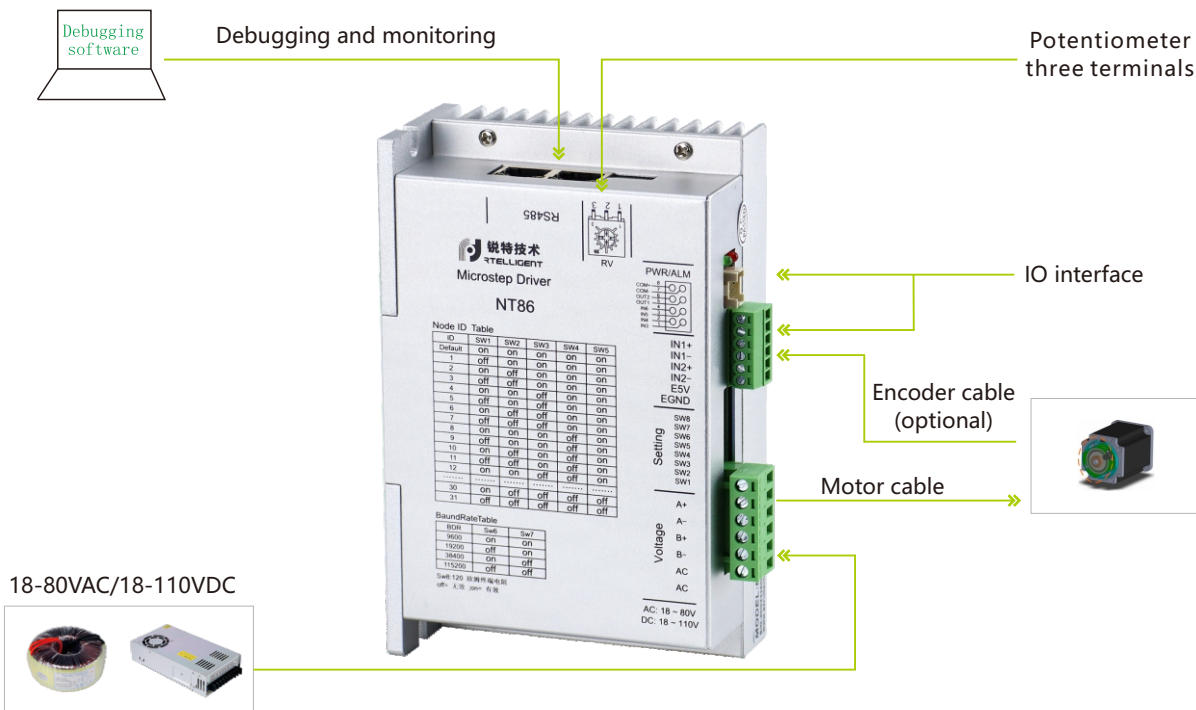

Function Setting

ID setting		
on=0,off=1		
ID=sw1+sw2*2+sw3*4+sw4*8+sw5*16		
Ensure the ID number is set correctly before powering on		
Baud rate setting		
BDR	SW6	SW7
9600	on	on
19200	off	on
38400	on	off
115200	off	off
The baud rate of the slave station must correspond to the baud rate set by the master station		
When adjusting the dial code,it is necessary to power off and restart the drive to take effect.		
Input interface		
Input 1	IN1+ IN1-	Differential input or encoder input interface
Input 2	IN2+ IN2-	
Input 3	IN3	Single-ended common anode input
Input 4	IN4	
Input 5	IN5	
Input 6	IN6	Common input
	COM+	
Output interface		
Output 1	OUT1	
Output 2	OUT2	
	COM-	Common output

Installation Dimension

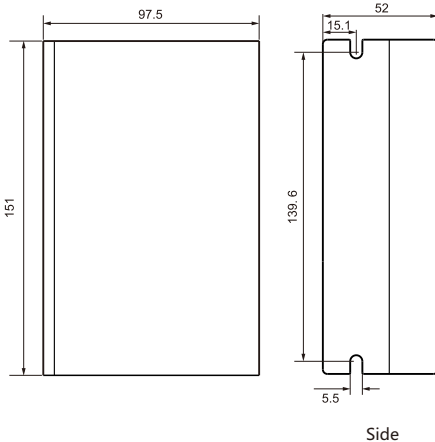

■ Modbus TCP Communication Type Stepper Drive

■ Protocol Overview

Schematic

Standard network architecture

Fieldbus architecture

IP protocol group

HTTP FTP DNS RPC

TCP UDP

IP

ETHERNET/802.3 Ethernet physical layer

Application layer

Transport layer

Network layer

Network interface layer

Modbus on TCP

TCP UDP

IP


ETHERNET/802.3 Ethernet physical layer

Modbus TCP is the same as the standard network bottom layer
Implement Modbus protocol only at the application layer


Features

- Compatible with standard Ethernet
- Cost effective of network implementation
- Easy to interconnect with various systems
- High-speed data transfer rate
- Mature supporting equipment
- Convenient for remote debugging and monitoring

■ TCP Network Connection Diagram

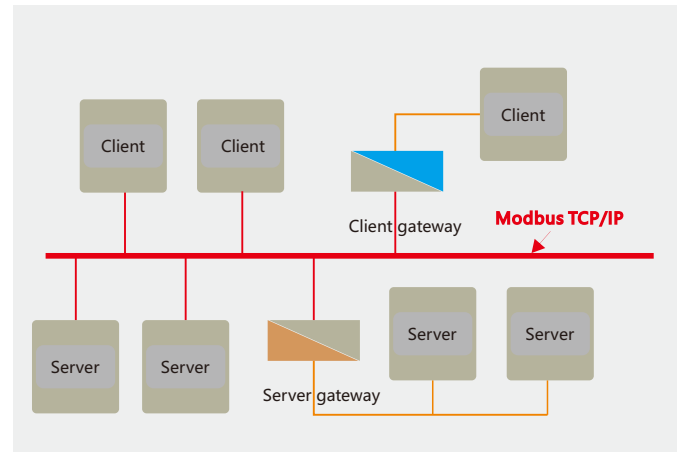

■ EP Series Network Connection Diagram

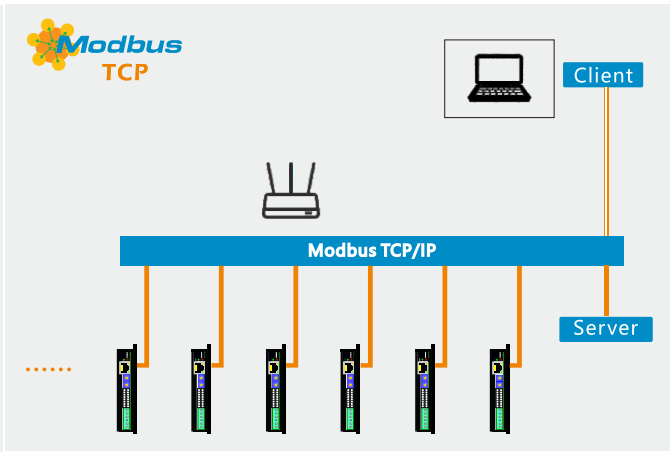

■ Technical Specifications

Model	Peak current A	Weight kg	Power voltage	Dimensions mm	Communication mode	Maximum baud rate	Matching motor
EPR60	6.0	0.4	18-50VDC	134×82×29	TCP/IP	10M/100M	Open loop below 60mm
EPT60	6.0	0.4	18-50VDC	134×82×29	TCP/IP	10M/100M	Closed loop below 60mm

■ LED Indication

LED status		Drive status	Fault handling
●	Steady green light	Drive not enabled	
●●	Flashing green light	Drive works fine	
●●●	1 green 1 red	Drive overcurrent	Check wiring、repair drive
●●●●	1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
●●●●●	1 green 3 red	Drive internal voltage error	Drive failure
●●●●●●	1 green 4 red	Encoder out-of-tolerance alarm	
●●●●●●●	1 green 5 red	Encoder phase error	
●●●●●●●●	1 green 6 red	Parameter storage error	
●●●●●●●●●	1 green 7 red	Motor phase loss	Check the wiring terminal and confirm the extension cable connector

EPR60

The Ethernet fieldbus-controlled stepper drive EPR60 runs the Modbus TCP protocol based on standard Ethernet interface and integrates a rich set of motion control functions. EPR60 adopts standard 10M/100M bps network layout, which is convenient to build the Internet of Things for automation equipment. EPR60 is compatible with open-loop stepper motors base below 60mm.

- Control mode: fixed length/fixed speed/homing/multi-speed/multi-position
- Debugging software: RTConfigurator (USB interface)
- Power voltage: 18-50VDC
- Typical applications: assembly lines, warehousing logistics equipment, multi-axis positioning platforms, etc


■ Drive Interface & Connection



■ Function Setting


Input interface		
3	IN6+	Differential input or encoder input interface
4	IN6-	
5	IN5+	
6	IN5-	
7	IN3	Single-ended common anode input
8	IN4	
9	IN1	
10	IN2	Common input
11	COM+	
Output interface		
16	OUT1	Single-ended common cathode input
15	OUT2	
12/14	COM-	Common output
IP setting		
IP Add = S1*10+S2+10		
Ensure the IP address is set correctly before powering on		

■ Installation Dimension

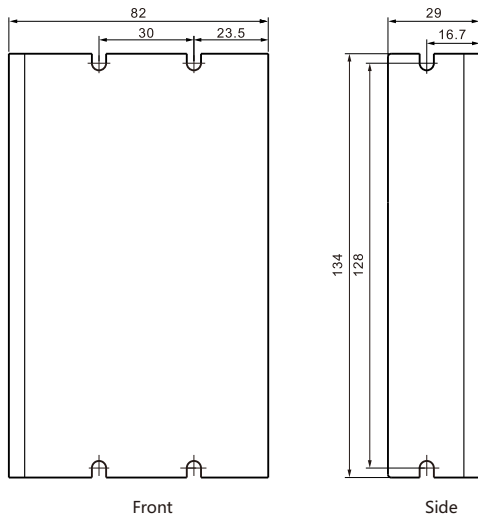


■ EtherCAT Protocol: Based on Industrial Ethernet Fieldbus communciation


■ EtherCAT Principle

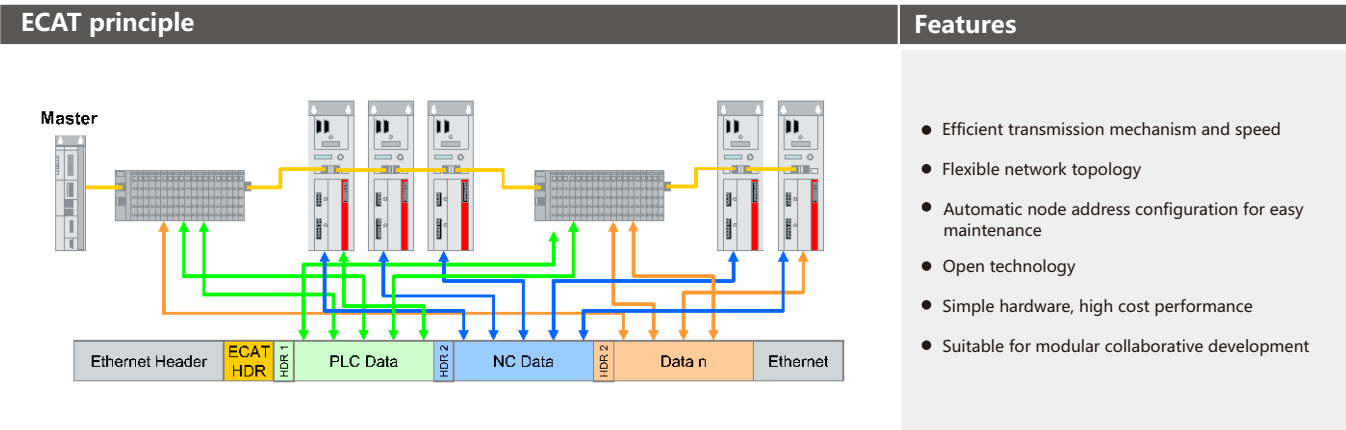

■ CANopen over EtherCAT Protocol Overview

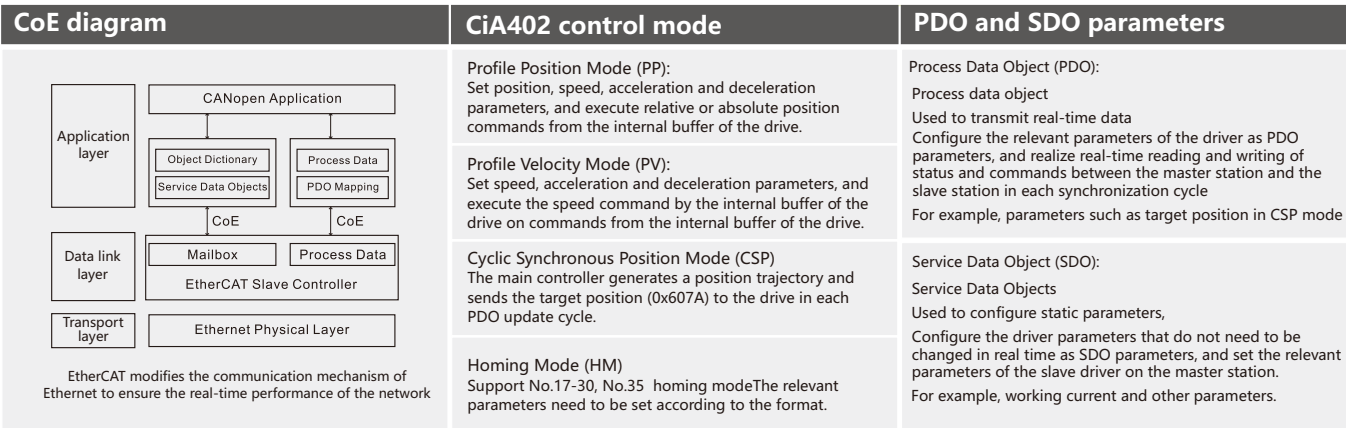


■ EtherCAT Network Diagram

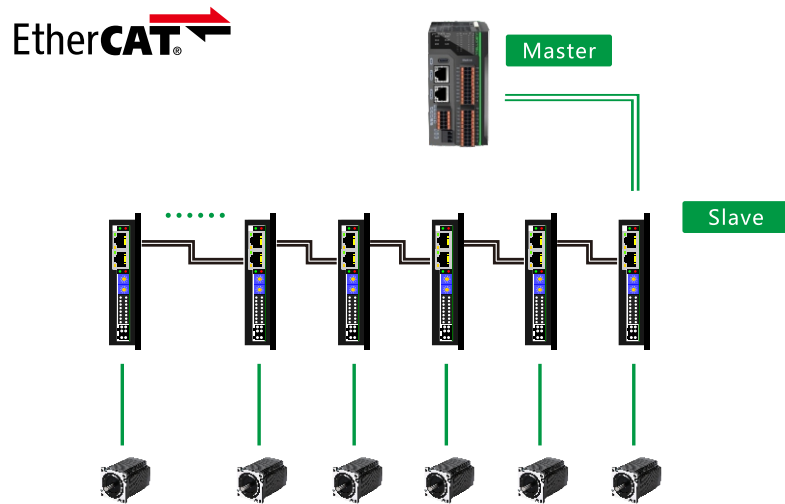

■ EtherCAT Topology

■ General Master Stations Supported

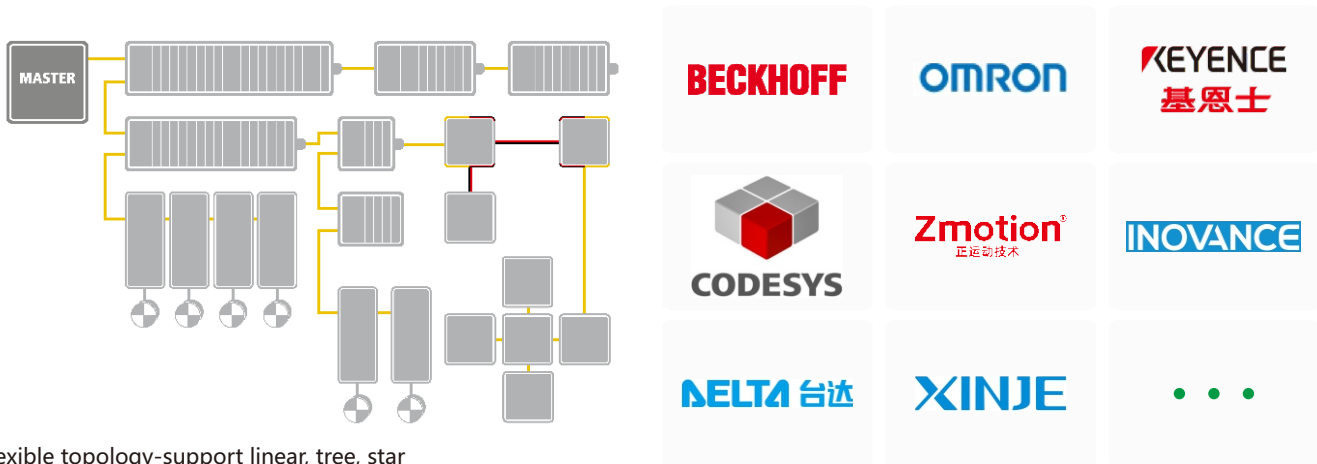

Flexible topology-support linear, tree, star

■ Technical Specifications

Model	Peak current A	Weight kg	Input voltage	Dimensions mm	Input and output	Matching motor
ECR42	6.0	0.4	18-80VDC	132×82×29	Six inputs, two outputs	open loop below 42mm
ECR60	6.0	0.4	18-80VDC	132×82×29	Six inputs, two outputs	open loop below 60mm
ECR86	7.2	0.6	18-80VAC	151×97×35	Six inputs, two outputs	open loop below 86mm
ECT42	6.0	0.4	18-80VDC	132×82×29	Four inputs, two outputs	closed loop below 42mm
ECT60	6.0	0.4	18-80VDC	132×82×29	Four inputs, two outputs	closed loop below 60mm
ECT86	7.2	0.6	18-80VAC	151×97×35	Four inputs, two outputs	closed loop below 86mm
ECR60X2A	6.0	0.5	18-80VDC	175×98×33	Eight inputs, four outputs	open loop below 60mm
ECT60X2	6.0	0.5	18-80VDC	175×98×33	Eight inputs, four outputs	closed loop below 60mm

■ LED Indication









LED status	Drive status	Fault handling
Steady green light	Drive not enabled	
Flashing green light	Drive works fine	
1 green 1 red	Drive overcurrent	Check wiring, repair drive
1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
1 green 3 red	Drive internal voltage error	Drive failure
1 green 4 red	Encoder out-of-tolerance alarm	
1 green 5 red	Encoder phase error	
1 green 6 red	Parameter storage error	
1 green 7 red	Motor phase loss	Check the wiring terminal and confirm the extension cable connector

■ Common Parameter

Function	Object dictionary	Subindex	Content	Remark
Peak current	0x2000	—	Modify the motor maximum current	The maximum motor current cannot be exceeded
Encoder resolution	0x2020	—	Set the motor encoder resolution after 4 times the frequency	Related to motor/default 400pulse/r
Motor resolution	0x2001	—	Set the resolution of one motor revolution	Initial value 10000
Selection of pulses per revolution	0x2057	—	Select the actual motor pulse per revolution parameter value	The default 0 is the encoder resolution value
Save parameters	0x1010:	1	Save all parameters(0→1)	Select 1 to set the value for 2001
The current position of the motor	0x6064	—	Display the current position value of the motor	Based on pulses per revolution
Input port status display	0x60FD	—	Display the actual status of the input port	
Input port function selection	0x2007:	1/2/3/4	Input port function selection/sub-index is IN port serial number	8bit binary/convert to decimal:
Input IO polarity	0x2008	—	Select IO port input polarity	

Note: The object dictionary address of axis 2 of ECT60X2/ECR60X2A is the address of the object dictionary of axis 1, plus 0x0800:

■ LED Indication

LED status			Communication status
GREEN		Not bright	initialization
		Slow flash	pre-operational
		Single flash	safe-operational
		Constant bright	operational
RED		Not bright	No error
		Slow flash	General error
		Single flash	Sync error
		Double flash	Watchdog error

Slow flash: on for 200ms, off for 200ms; repeat
Single flash: on for 200ms, off for 1s; repeat
Double flash: on for 200ms, off for 200ms, then on for 200ms, off for 1s; repeat


ECR Series

The EtherCAT fieldbus stepper drive is based on the CoE standard framework and complies with the CiA402 standard. The data transmission rate is up to 100Mb/s, and supports various network topologies.

- ECR42 matches open loop stepper motors below 42mm.
- ECR60 matches open loop stepper motors below 60mm.
- ECR86 matches open loop stepper motors below 86mm.

- Control mode: PP, PV, CSP, HM, etc
- Power supply voltage: 18-80VDC (ECR60), 24-100VDC/18-80VAC (ECR86)
- Input and output: 2-channel differential inputs/4-channel 24V common anode inputs; 2-channel optocoupler isolated outputs
- Typical applications: assembly lines, lithium battery equipment, solar equipment, 3C electronic equipment, etc


Drive Interface & Connection

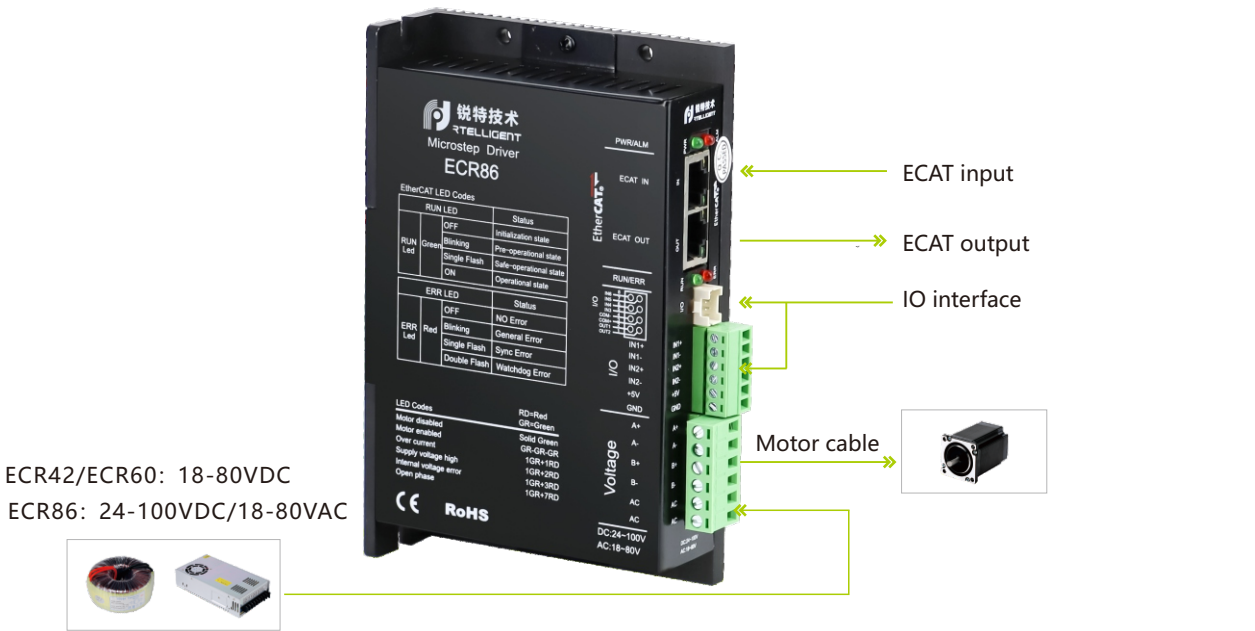

Function Setting

Input interface		
Input1	IN1+	Differential input signal
	IN1-	
Input2	IN2+	5V level input
	IN2-	
Input3	IN3	Single-ended common anode input
Input4	IN4	Default function: IN3 positive limit
Input5	IN5	IN4 negative limit
Input6	IN6	IN5 origin
	COM+	Common input
Internal power output interface		
	+5V	Internal 5V/80mA power output
	GND	
Output interface		
Output1	OUT1	Single-ended common cathode output
Output2	OUT2	
	COM-	Common output

Installation Dimension

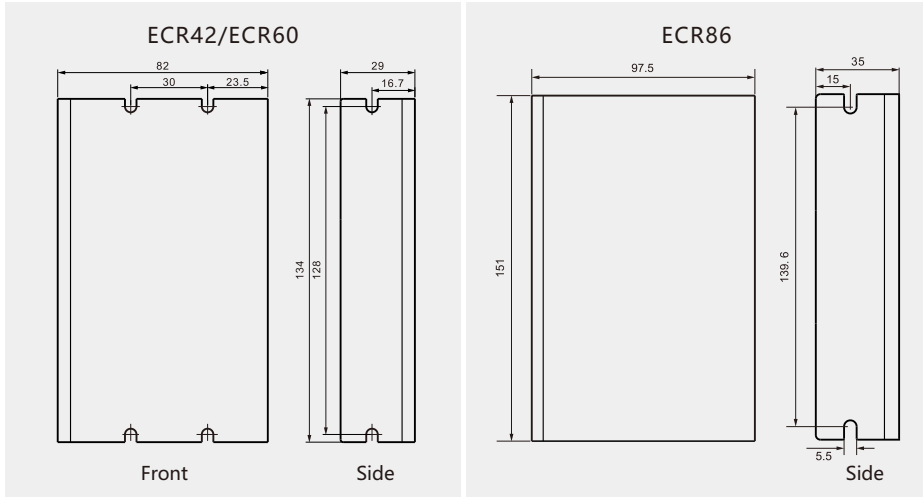


ECT Series

The EtherCAT fieldbus stepper drive is based on the CoE standard framework and complies with the CiA402 standard. The data transmission rate is up to 100Mb/s, and supports various network topologies.

- ECT42 matches closed loop stepper motors below 42mm.
- ECT60 matches closed loop stepper motors below 60mm.
- ECT86 matches closed loop stepper motors below 86mm.

- Control mode: PP, PV, CSP, HM, etc
- Power supply voltage: 18-80VDC (ECT60), 24-100VDC/18-80VAC (ECT86)
- Input and output: 4-channel 24V common anode input; 2-channel optocoupler isolated outputs
- Typical applications: assembly lines, lithium battery equipment, solar equipment, 3C electronic equipment, etc


Drive Interface & Connection

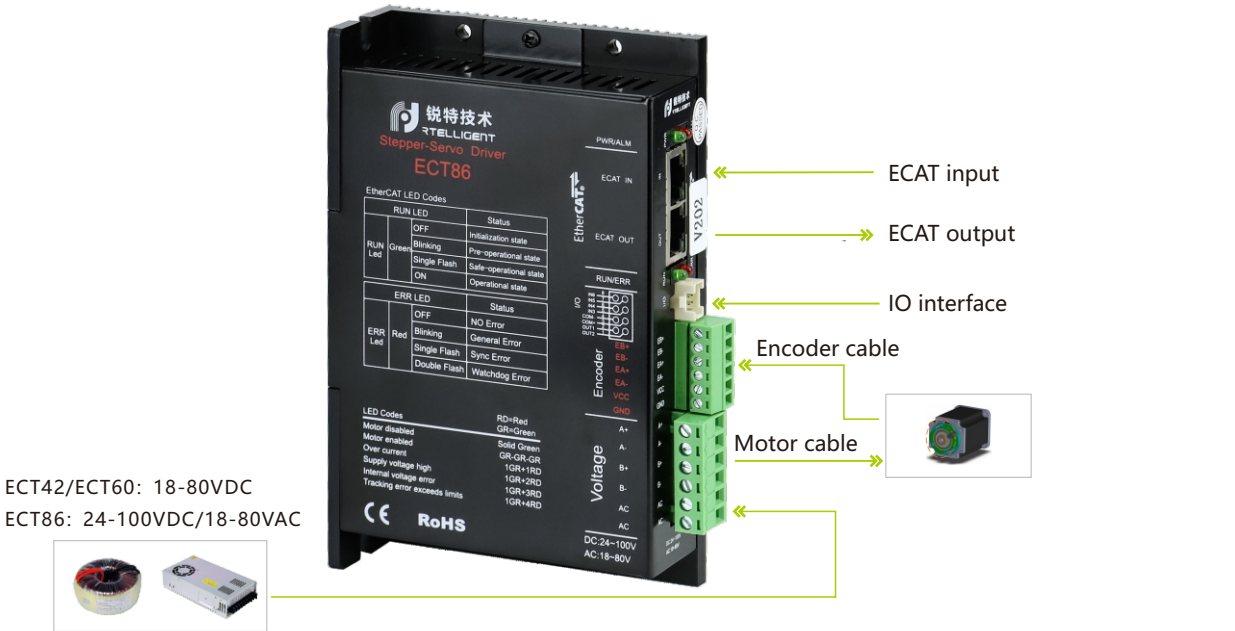

Function Setting

Encoder interface		
EB+	EB-	Encoder phase A/B signal
EA+	EA-	
VCC	GND	Encoder 5V power supply Provided internally by the drive
Input interface		
Input3	IN3	Single-ended common anode input
Input4	IN4	Default function: IN3 positive limit
Input5	IN5	IN4 negative limit
Input6	IN6	IN5 origin
	COM+	24V common input
Output interface		
Output1	OUT1	Single-ended common cathode output
Output2	OUT2	
	COM-	0V common output

Installation Dimension

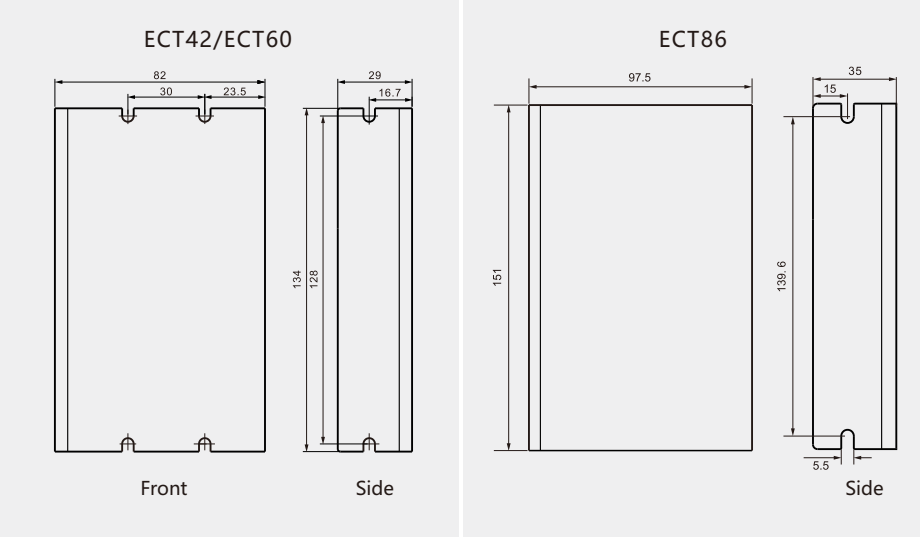


ECR60X2A

The EtherCAT fieldbus open loop stepper drive ECR60X2A is based on the CoE standard framework and complies with the CiA402 standard. The data transmission rate is up to 100Mb/s, and supports various network topologies. ECR60X2A matches open loop stepper motors below 60mm.

- Control modes: PP, PV, CSP, CSV, HM, etc
- Power supply voltage: 18-80V DC
- Input and output: 8-channel 24V common positive input; 4-channel optocoupler isolation outputs
- Typical applications: assembly lines, lithium battery equipment, solar equipment, 3C electronic equipment, etc


Drive Interface & Connection

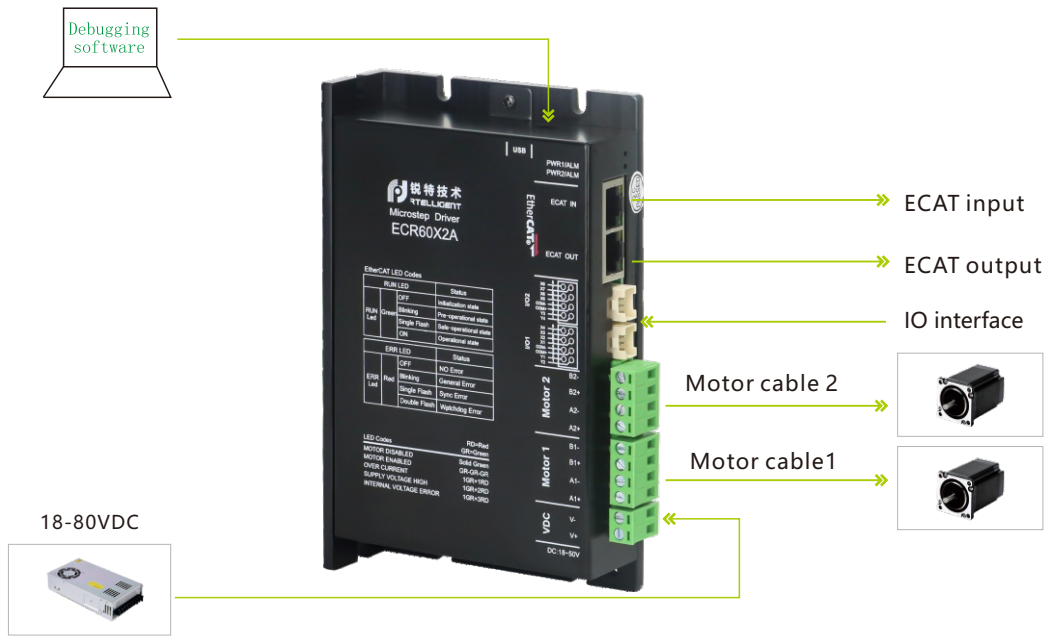

Function Setting

Signal interface	ID	Default function
I/O 1	Y2	Axis 1 brake output
	Y1	Axis 1 alarm output
	COM+	Axis 1 input common : 24V
	COM-	Axis 1 output Common: 0V
	X1	Axis 1 negative limit input
	X2	Axis 1 positive limit input
	X3	Axis 1 zero input
	X4	Axis 1 emergency stop input
I/O 2	Y4	Axis 2 brake output
	Y3	Axis 2 alarm output
	COM+	Axis 2 input common : 24V
	COM-	Axis 2 output Common: 0V
	X5	Axis 2 negative limit input
	X6	Axis 2 positive limit input
	X7	Axis 2 zero input
	X8	Axis 2 emergency stop input

Installation Dimension

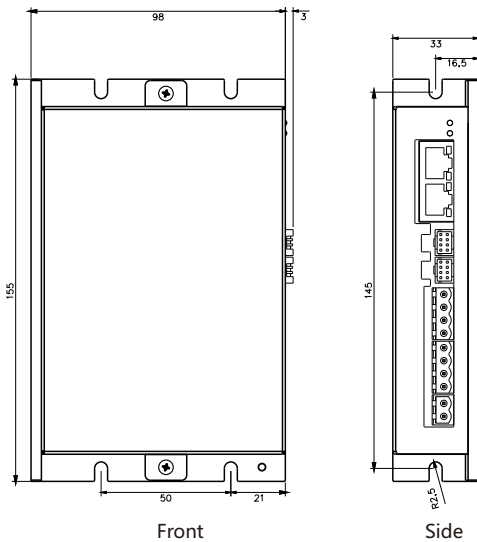


ECT60X2

The EtherCAT fieldbus stepper drive ECT60X2 is based on the CoE standard framework and complies with the CiA402 standard. The data transmission rate is up to 100Mb/s, and supports various network topologies. ECT60X2 matches closed loop stepper motors below 60mm.

- Control mode: PP, PV, CSP, HM, etc
- Power supply voltage: 18-80VDC
- Input and output: 8-channel 24V common anode input; 4-channel optocoupler isolated outputs
- Typical applications: assembly lines, lithium battery equipment, solar equipment, 3C electronic equipment, etc


Drive Interface & Connection

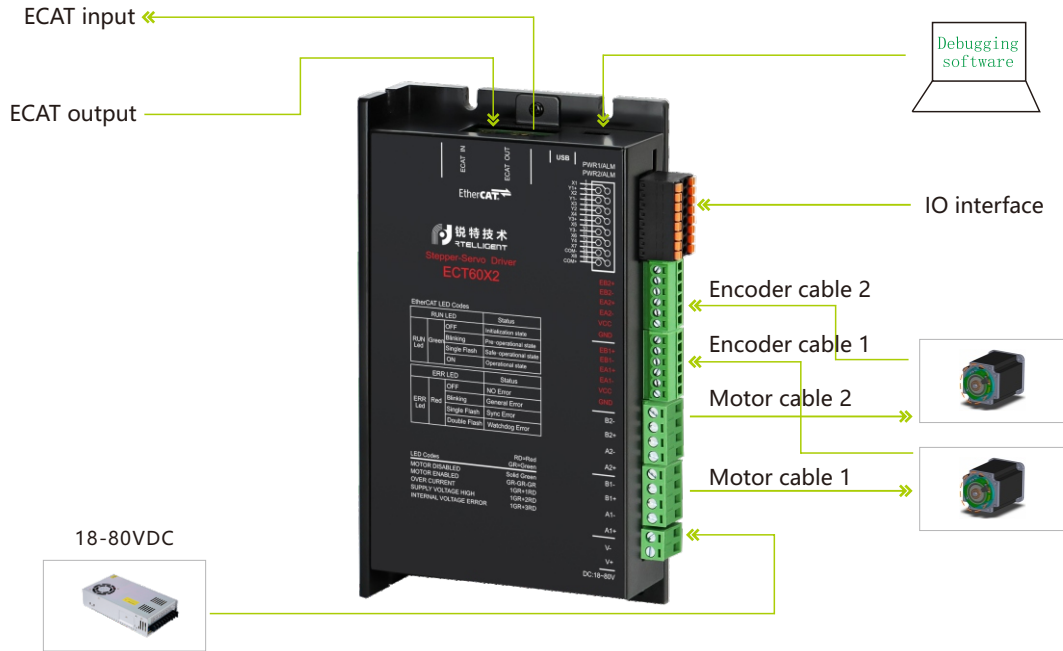

Function Setting

Pin No	ID	Default function
1	X1	Axis 1 negative limit input
3	X2	Axis 1 positive limit input
5	X3	Axis 1 zero input
7	X4	Axis 1 emergency stop input
9	X5	Axis 2 negative limit input
11	X6	Axis 2 positive limit input
13	X7	Axis 2 zero input
15	X8	Axis 2 emergency stop input
2	Y1+	Axis 1 alarm output positive
4	Y1-	Axis 1 alarm output negative
6	Y2	Axis 1 brake output
8	Y3+	Axis 2 alarm output positive
10	Y3-	Axis 2 alarm output negative
12	Y4	Axis 2 brake output
14	COM-	Output common : 0V
16	COM+	Input Common: 24V

Installation Dimension

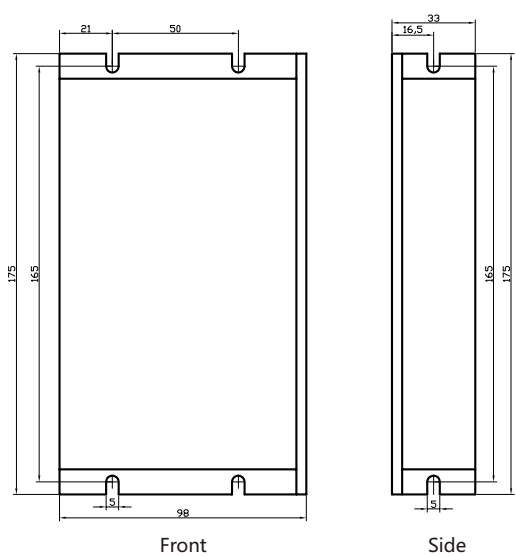


Closed Loop Stepper System


Closed loop stepper system is a control motor solution featuring high speed, high torque, high precision, low vibration, low heating and no loss of step, which is formed based on the common open loop stepper motor in combination with position feedback and servo algorithm.

Closed loop stepper motor is equipped with an optical encoder on the rear shaft of the open-loop motor to form position feedback.

Closed loop stepper drive processes the encoder position feedback to achieve more precise current and position control.

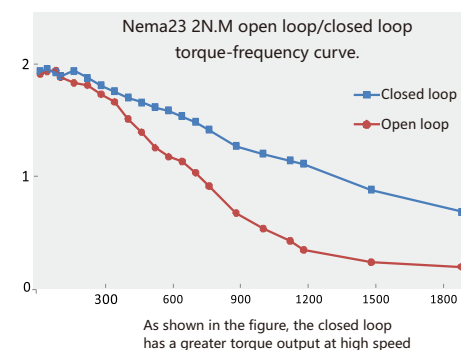

■ System Diagram

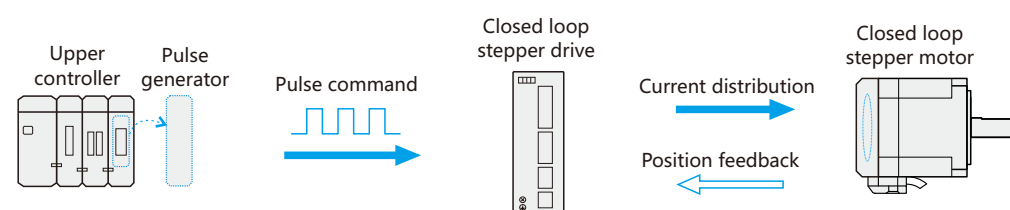



■ Features

No loss of step

The position of the motor is fed back by the optical encoder and compared with the drive command. The current is adjusted according to the position error to prevent losing step.

Fast response

The closed loop stepper motor rotor is synchronized with the given pulse, enabling fast positioning without rigidity adjustment without too long current settling time.

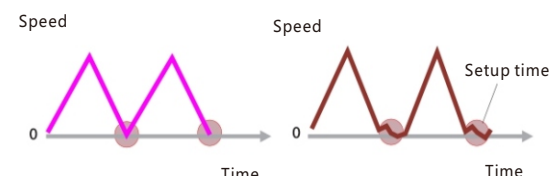
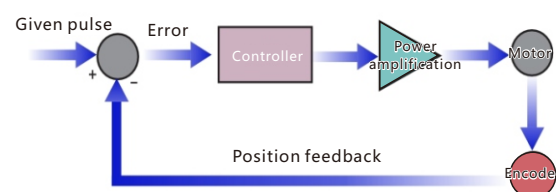


High torque

The closed loop stepper system has better torque-frequency characteristics, and the current decay speed is slow, which can improve the output torque of the motor at high speed.


Low heating

The closed loop stepper system dynamically adjusts the current according to the load condition, which has a higher current utilization rate than the open loop system and reduces the heating of the motor.

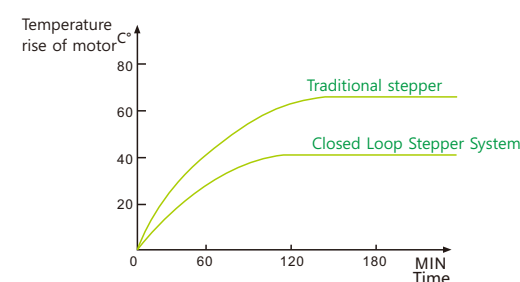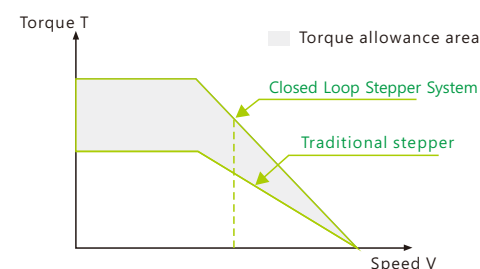


Closed Loop Stepper Drive

T series closed loop stepper drive, based on the new DSP hardware platform, using magnetic field orientation (FOC) and field- weakening control algorithm, has all-round performance beyond ordinary stepper performance.

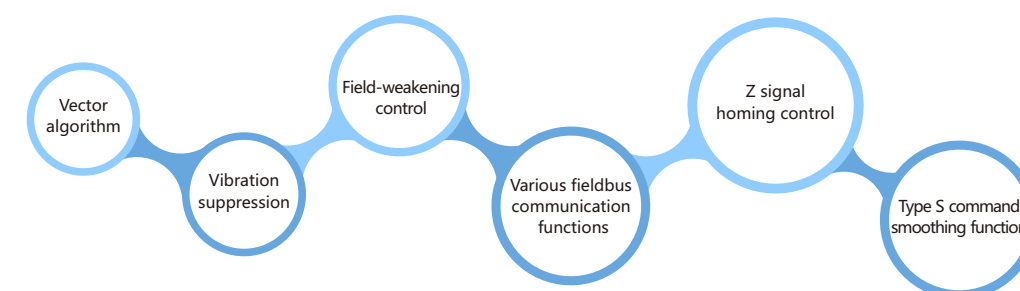

■ Naming Rule

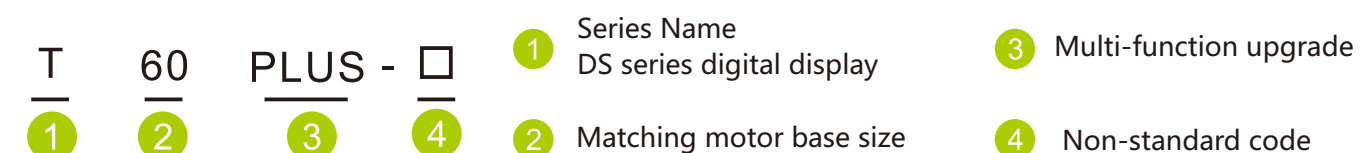

*Model naming rules are only used for model meaning analysis. For specific optional models, please refer to the details page.

■ Features

General-purpose T series



Functional PLUS series



Digital display DS series



- Matching motor frame below 86mm
- PUL&DIR or CW&CCW
- Auto-tuning match motor function
- Smoothing filter function optional
- Debugging software to modify and monitor drive parameters and status


- Matching motor frame below 86mm
- PUL&DIR or CW&CCW
- Auto-tuning match motor function
- Smoothing filter function optional
- Debugging software to modify and monitor drive parameters and status

- Matching motor frame below 86mm
- Real-time display of motor running status
- Higher resolution encoders
- Panel to modify and monitor drive parameters and status
- Micro USB interface


Technical Specifications

Model	Peak current A	Weight kg	Input voltage	Dimension mm	Number of micro-stepping	Pulse level	Matching motor
T42	3.0	0.2	18-68VDC	116×69×26.5	800-40000	3.3-24V	closed loop below 42mm
T60	6.0	0.2	18-68VDC	116×69×26.5	800-40000	3.3-24V	closed loop below 60mm
T60PLUS	6.0	0.3	18-48VDC	118×76×25	800-40000	5-24V	closed loop below 60mm
T86	7.0	0.6	18-80VAC	151×97×52	800-40000	3.3-24V	closed loop below 86mm
DS86	7.2	0.8	18-80VAC	151×141×47	400-60000	3.3-24V	closed loop below 86mm

Control Signal Wiring Example

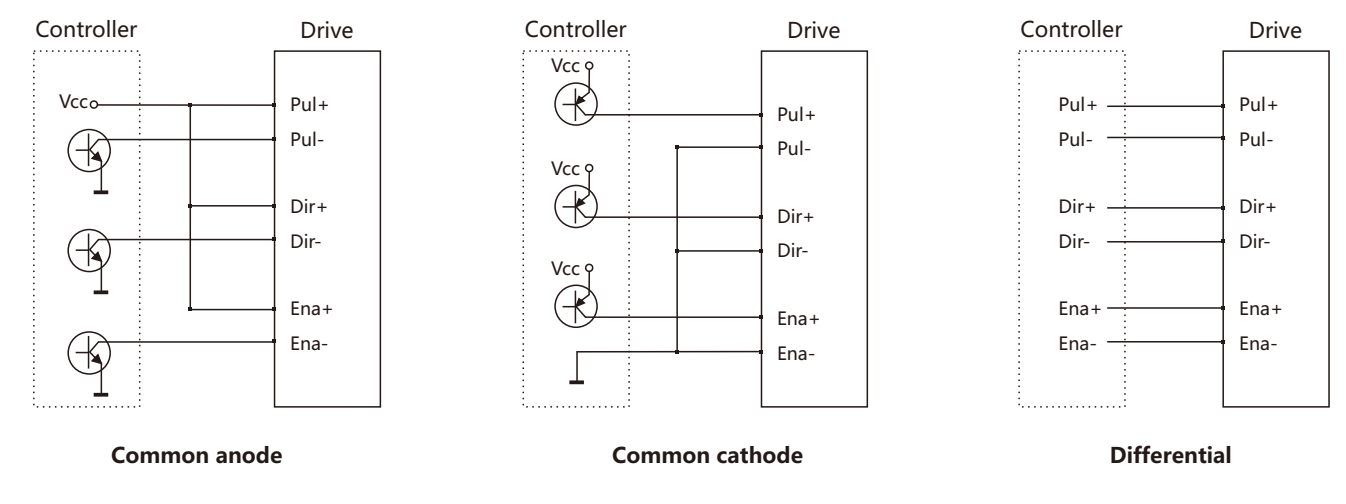

Output Signal Wiring Example

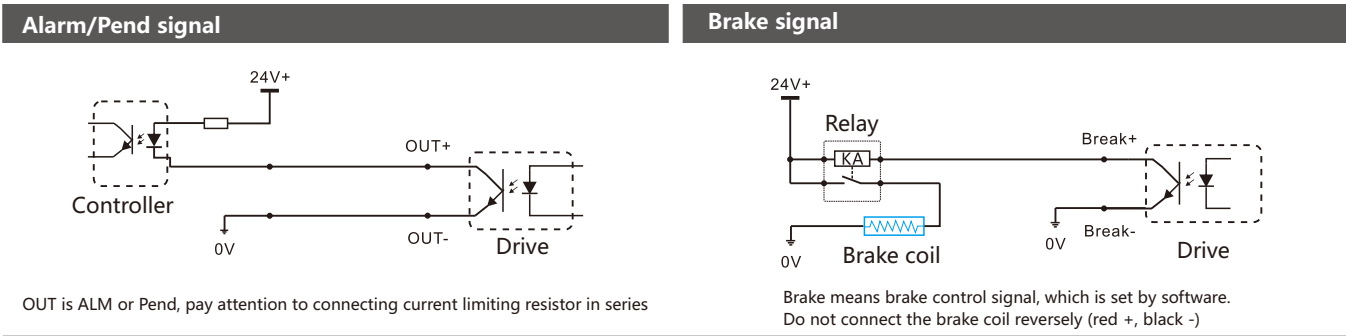

LED Indication


LED status	Drive status	Fault handling
Steady green light	Drive not enabled	
Flashing green light	Drive works fine	
1 green 1 red	Drive overcurrent	Check wiring、repair drive
1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
1 green 3 red	Drive internal voltage error	Drive failure
1 green 4 red	Encoder out-of-tolerance alarm	
1 green 5 red	Encoder phase error	
1 green 6 red	Parameter storage error	
1 green 7 red	Motor phase loss	Check the wiring terminal and confirm the extension cable connector

T60/T42

T60/T42 closed loop stepper drive, based on 32-bit DSP platform, built-in vector control technology and servo demodulation function, combined with the feedback of closed-loop motor encoder, makes the closed loop stepper system has the characteristics of low noise, low heat, no loss of step and higher application speed, which can improve the performance of intelligent equipment system in all aspects. T60 matches closed- loop stepper motors below 60mm, and T42 matches closed- loop stepper motors below 42mm.

- Pulse mode: PUL&DIR/CW&CCW
- Signal level: 3.3-24V compatible; serial resistance not required for the application of PLC.
- Power voltage: 18-68VDC, and 36 or 48V recommended.
- Typical applications: Auto-screwdriving machine, servo dispenser, wire-stripping machine, labeling machine, medical detector, electronic assembly equipment etc.

Drive Interface & Connection

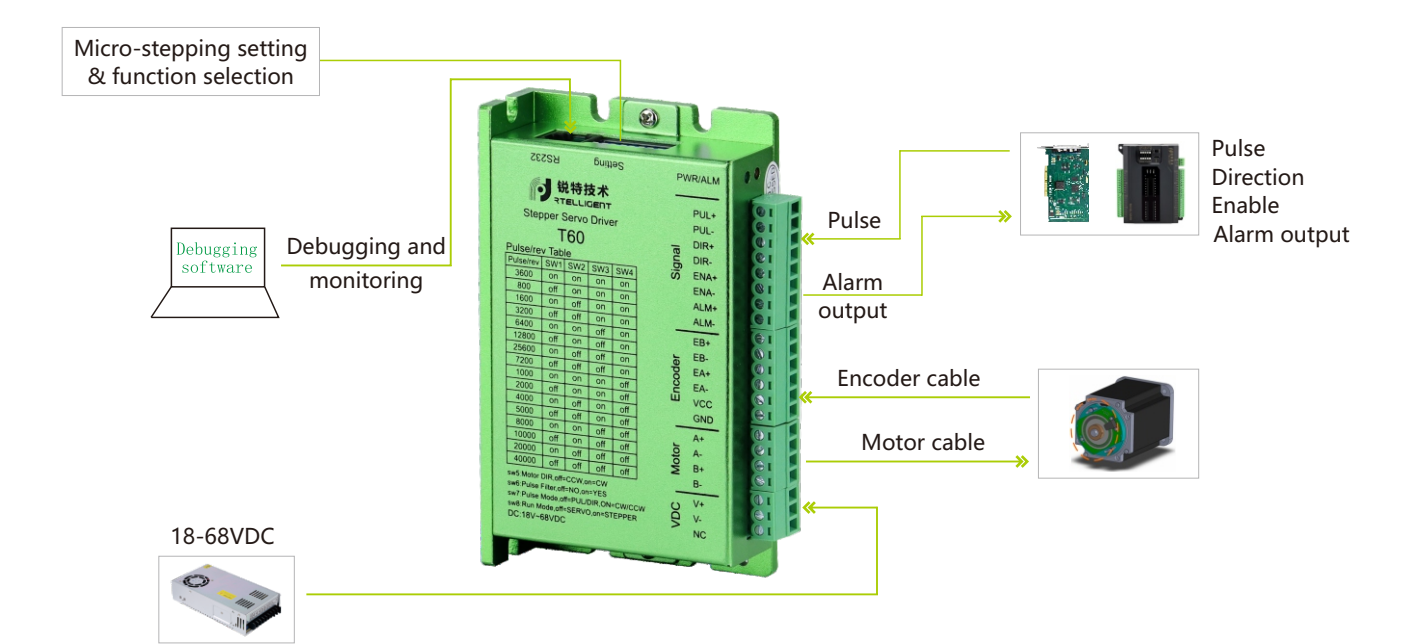


Function Selection

SW5	Running direction	on	Forward	SW7	Pulse mode	on	CW/CCW
		off	Backward			off	PUL&DIR
SW6	Command smoothing	on	S-type acceleration and deceleration take effect	SW8	Open/closed loop	on	Open loop mode
		off	S-type acceleration and deceleration are invalid			off	Closed loop mode

Micro-stepping Setting

Pulse/rev	SW1	SW2	SW3	SW4
3600	on	on	on	on
800	off	on	on	on
1600	on	off	on	on
3200	off	off	on	on
6400	on	on	off	on
12800	off	on	off	on
25600	on	off	off	on
7200	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
40000	off	off	off	off

Installation Dimension

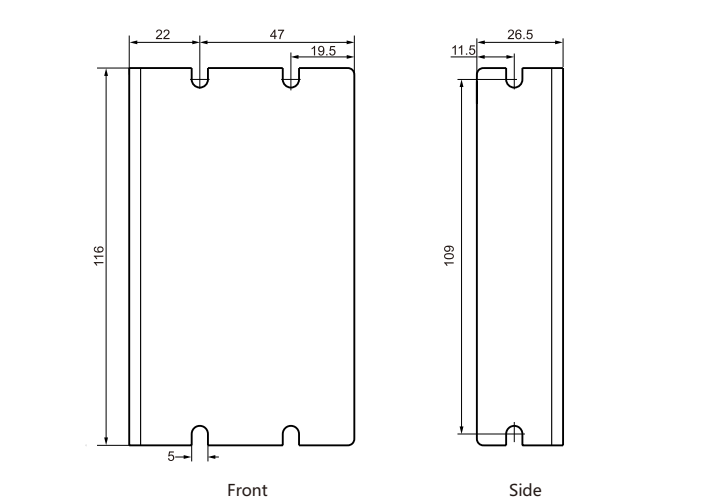


T60PLUS

T60PLUS closed loop stepper drive, with encoder Z signal input and output functions. It integrates a miniUSB communication port for easy debugging of related parameters.

T60PLUS matches closed loop stepper motors with Z signal below 60mm.

- Pulse mode: PUL&DIR/CW&CCW
- Signal level: 5V/24V
- Power voltage: 18-48VDC, and 36 or 48V recommended.
- Typical applications: Auto-screwdriving machine, servo dispenser, wire-stripping machine, labeling machine, medical detector, electronic assembly equipment etc.

Drive Interface & Connection

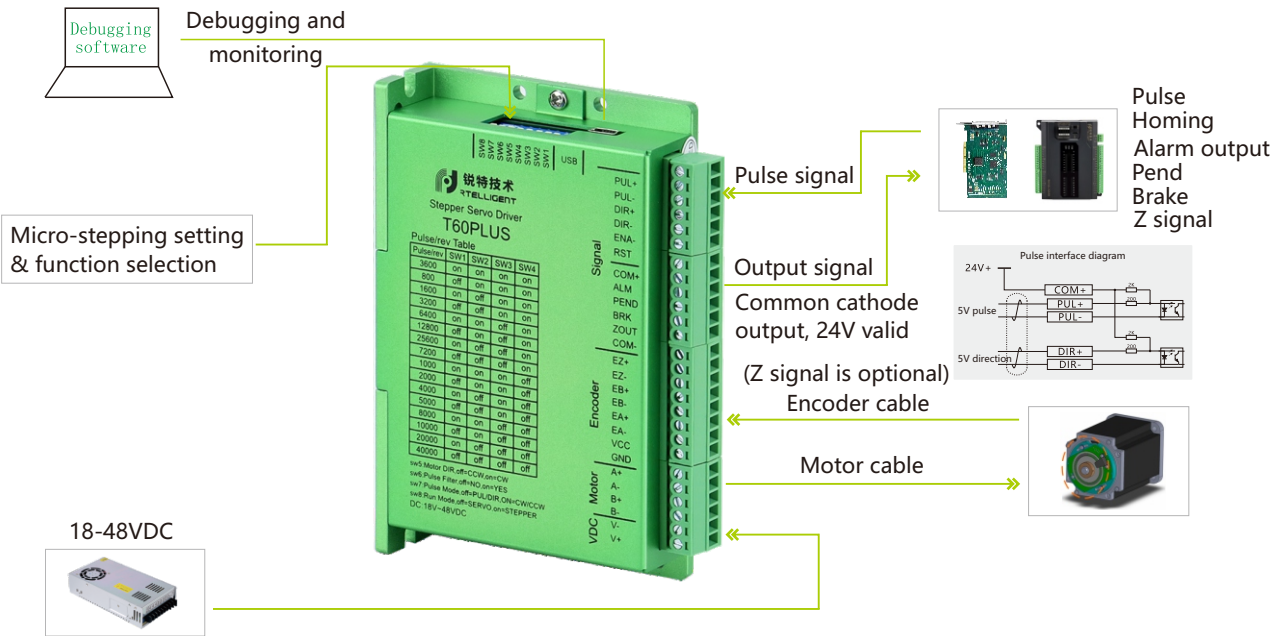


Function Selection

SW5	Running direction	on	Forward	SW7	Pulse mode	on	CW/CCW
		off	Backward			off	PUL&DIR
SW6	Command smoothing	on	S-type acceleration and deceleration take effect	SW8	Open/closed loop	on	Open loop mode
		off	S-type acceleration and deceleration are invalid			off	Closed loop mode

Micro-stepping Setting

Pulse/rev	SW1	SW2	SW3	SW4
3600	on	on	on	on
800	off	on	on	on
1600	on	off	on	on
3200	off	off	on	on
6400	on	on	off	on
12800	off	on	off	on
25600	on	off	off	on
7200	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
40000	off	off	off	off

Installation Dimension

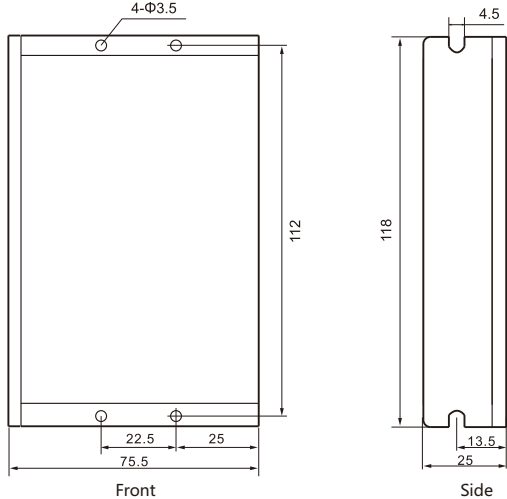


T86

T86 closed loop stepper drive, based on 32-bit DSP platform, built-in vector control technology and servo demodulation function, combined with the feedback of closed-loop motor encoder, makes the closed loop stepper system has the characteristics of low noise, low heat, no loss of step and higher application speed, which can improve the performance of intelligent equipment system in all aspects.

T86 matches closed- loop stepper motors below 86mm.

- Pulse mode: PUL&DIR/CW&CCW
- Signal level: 3.3-24V compatible; serial resistance not required for the application of PLC.
- Power voltage: 18-110VDC or 18-80VAC, and 48VAC recommended.
- Typical applications: Auto-screwdriving machine, servo dispenser, wire-stripping machine, labeling machine, medical detector, electronic assembly equipment etc.

Drive Interface & Connection

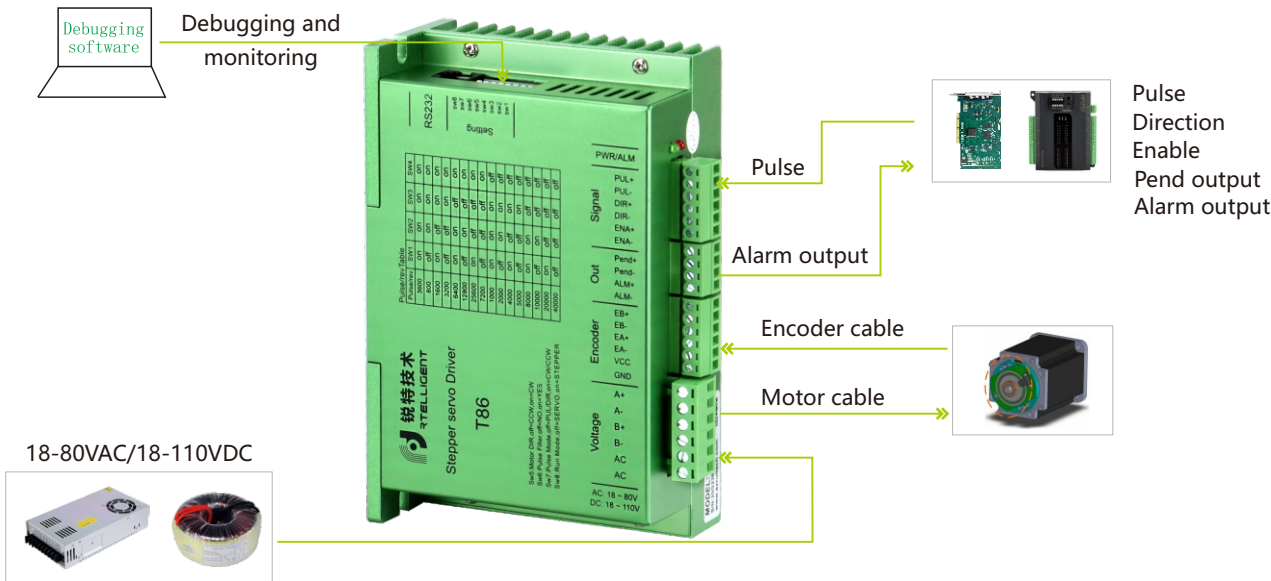


Function Selection

SW5	Running direction	on	Forward	SW7	Pulse mode	on	CW/CCW
		off	Backward			off	PUL&DIR
SW6	Command smoothing	on	S-type acceleration and deceleration take effect	SW8	Open/closed loop	on	Open loop mode
		off	S-type acceleration and deceleration are invalid			off	Closed loop mode

Micro-stepping Setting

Pulse/rev	SW1	SW2	SW3	SW4
3600	on	on	on	on
800	off	on	on	on
1600	on	off	on	on
3200	off	off	on	on
6400	on	on	off	on
12800	off	on	off	on
25600	on	off	off	on
7200	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
40000	off	off	off	off

Installation Dimension

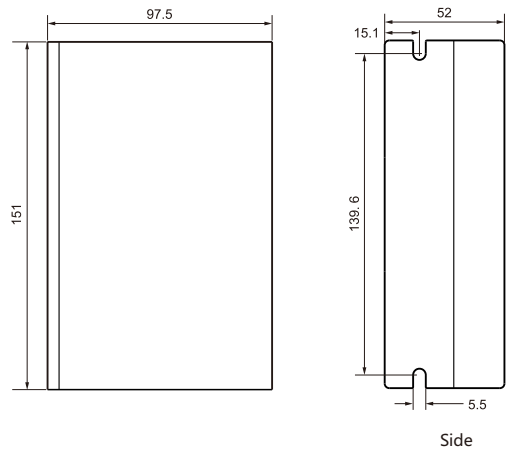


DS86

T86 closed loop stepper drive, based on 32-bit DSP platform, built-in vector control technology and servo demodulation function, combined with the feedback of closed-loop motor encoder, makes the closed loop stepper system has the characteristics of low noise, low heat, no loss of step and higher application speed, which can improve the performance of intelligent equipment system in all aspects.

T86 matches closed- loop stepper motors below 86mm.

- Pulse mode: PUL&DIR/CW&CCW
- Signal level: 3.3-24V compatible; serial resistance not required for the application of PLC.
- Power voltage: 24-100VDC or 18-80VAC, and 75VAC recommended.
- Typical applications: Auto-screwdriving machine, servo dispenser, wire-stripping machine, labeling machine, medical detector, electronic assembly equipment etc.

Drive Interface & Connection

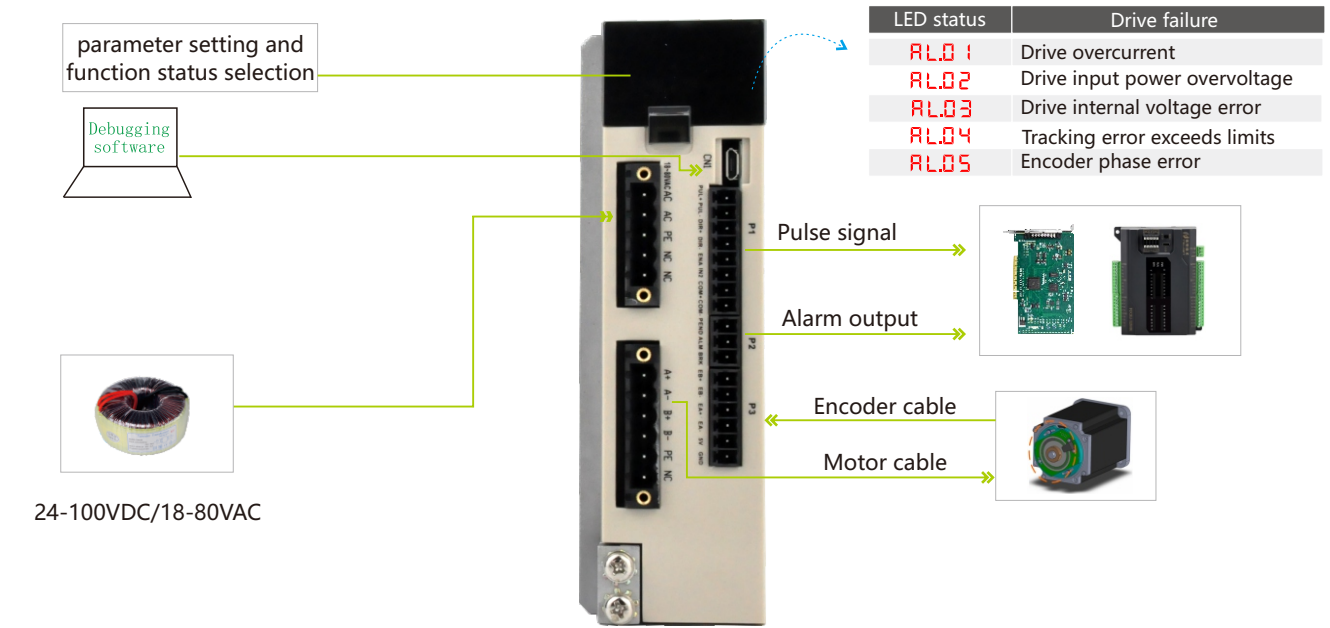


Description

Parameter setting ways:
1.Connect with PC computer through USB interface.
Set parameter by debugging software.
2. Set parameter by the DS86 setting buttons.

Buttons	Description
Ⓜ	MOD :return to the previous menu, cancelation of operation
⬆	UP: menu selection, data setting
⬇	DOWN : menu selection, data setting
Ⓢ	SET : function confirm

Installation Dimension

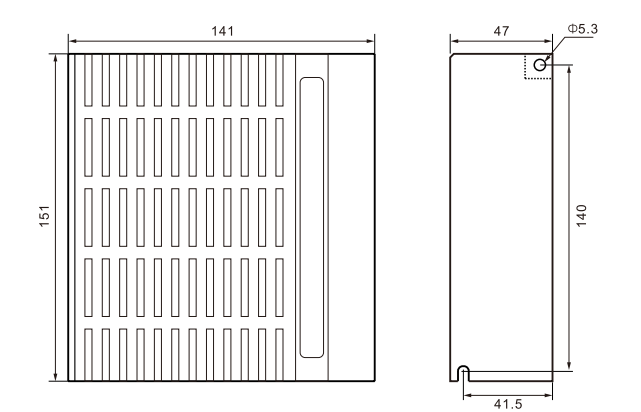

Parameter Setting


The parameters that can be set by the drive are PA-00 to PA-40

No.	Name	Range	Default	Description
00	Control mode	[0,2]	1	0: Open loop operation 1: Servo mode one 2: Servo mode two
01	Micro-stepping	[200,65535]	1600	The pulse number that needed by motor running one round
02	Maximum current	[100,7000]	7000	The maximum current needs to match the corresponding motor
03	Basic current percentage	[1,100]	50	
04	Encoder resolution	[500,65535]	4000	
05	Tracking error alarm threshold	[100,65535]	4000	Set alarm threshold of tracking error
06	Reverse direction	[0,1]	0	0:Forward 1:Backward
07	Command filtering	[1,512]	128	Delay time=setting value*50us During interpolation movement, set to 1
08	Pulse mode	[0,1]	0	0: Pulse + direction 1: CW + CCW
09	Pulse effective edge	[1,512]	128	0: Rising edge 1: Falling edge
10	Enable level	[0,1]	0	0: NO 1: NC

Closed Loop Stepper Motor

New AM series closed loop stepper motors are based on Cz optimized magnetic circuit design and the latest compact M-shaped molds. The motor body uses high magnetic density stator and rotor materials with high energy efficiency.

- Built-in high-resolution encoder, optional Z signal.
- The lightweight design of the AM series reduces the installation space of the motor.
- Permanent magnet brake is optional, Z-axis brake is faster.

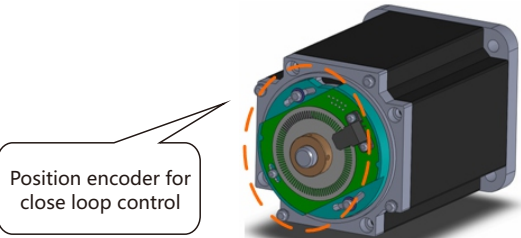

Naming Rule

57

1

A

2

M

3

23

4

E

5

D

6

Z

7

-

8

□

1 Base size

2 Step angle type code
A: 1.8 degrees B: 1.2 degrees
C: 0.72 degrees

3 Motor series code
M: M series

4 Motor torque
06:0.6Nm 30:3.0Nm
120:12Nm

5 Encoder type
E: 1000 line photoelectric encoder

6 Type of plug:
C: Encoder AMP6 plug outlet
D: Encoder DB9 plug outlet
X: Encoder DB9/Motor AMP4 plug
T: Encoder AMP6/Motor AMP4 plug
H: Encoder AMP9/Motor AMP4 plug (high voltage)

7 Supplementary code
Z:Encoder with Z signal

8 Non-standard code
Z2: with brake

*Model naming rules are only used for model meaning analysis. For specific optional models, please refer to the details page


Motor with Brake



- Closed loop stepper motor with brake
Suitable for Z-axis application environment.
When the drive is powered off or alarms, the brake is applied to protect the workpiece and lock it to avoid free sliding
- Permanent magnet brake
Start/stop quickly, low heating.
- 24V DC power supply
Can use drive brake output port control.
The outlet port can directly drive the relay to control the brake on /off.

Motor with Z Signal Encoder

- Closed loop stepper motor with Z signal
Suitable for precision homing applications,
Avoid the problem that the homing of the general sensor is biased due to the difference in the homing speed.
- Z signal differential output
Z signal is 5V differential output, strong anti-interference ability
- PLUS driver with Z signal collector output
PLUS drive adds Z signal reading and conversion output to realize Z signal output to PLC.

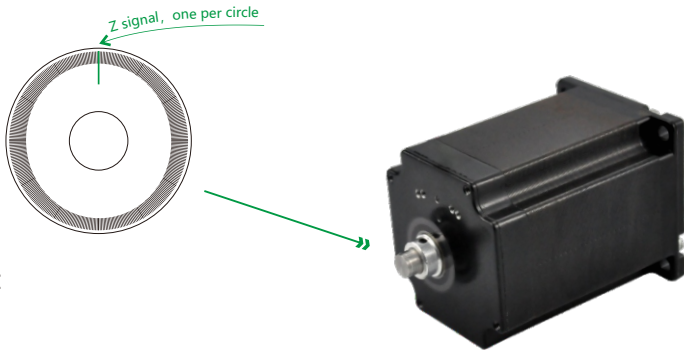


2-phase Stepper Motor 20/28mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
20AM003EC	1.8	0.03	0.6	5.7	2.6	3	4	20	46.0	0.09
28AM006EC	1.8	0.06	1.2	1.4	1.0	90	5	20	44.7	0.13
28AM013EC	1.8	0.13	1.2	2.2	2.3	180	5	20	63.6	0.22

*NEMA 8 (20mm), NEMA 11 (28mm)


20 Series Dimension (mm)

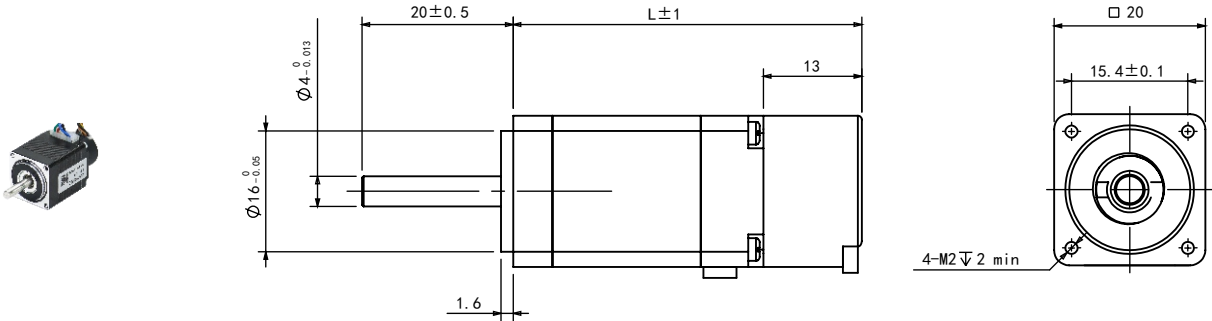

28 Series Dimension (mm)

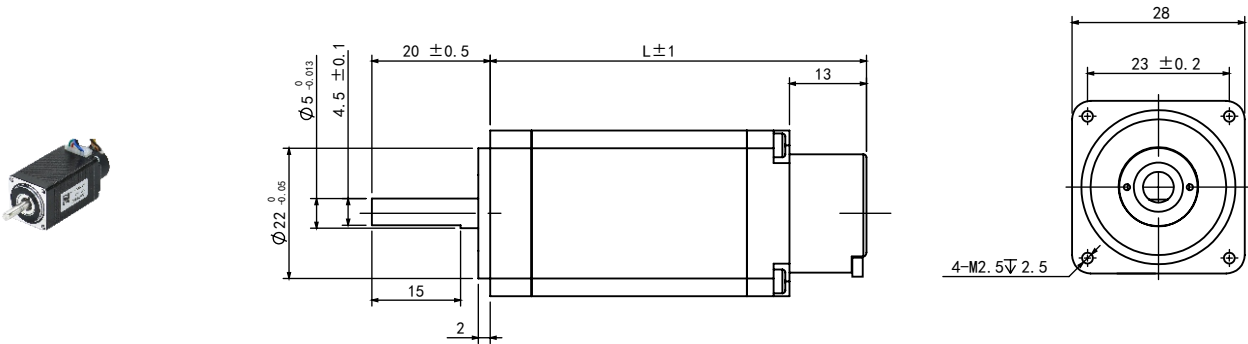

Torque-frequency Curve

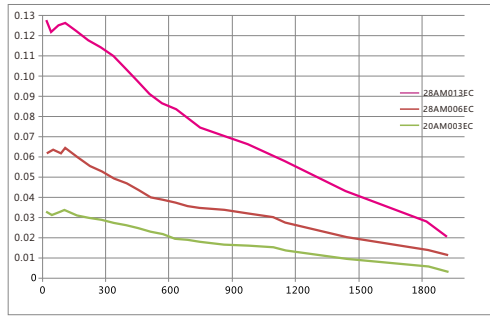

Drive: T42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600

Wiring Definition

A+	A-	B+	B-
Red	Blue	Green	Black


EB+	EB-	EA+	EA-	5V	GND
Yellow	Green	Black	Brown	Red	White

2-phase Stepper Motor 42mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
42A03EC	1.8	0.3	2.0	1.6	1.9	77	8	21	69	0.5
42A08EC	1.8	0.8	2.8	2.7	2.3	115	8	21	85	0.6
42AM06ED	1.8	0.6	2.0	1.1	1.5	82	5	24	67	0.4
42AM08ED	1.8	0.8	2.0	1.9	5.0	114	5	24	79	0.6

*NEMA 17 (42mm)

42A Series Dimension (mm)

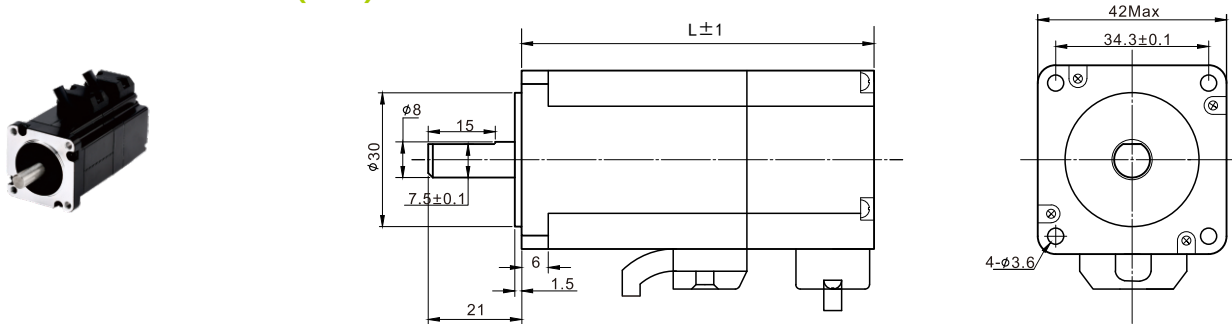

Torque-frequency Curve

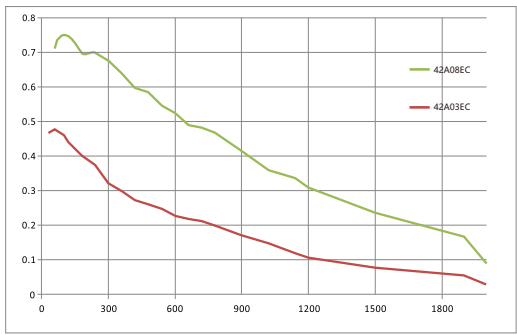


Drive: T42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600

Wiring Definition


A+	A-	B+	B-
Red	Black	Yellow	Blue

EB+	EB-	EA+	EA-	5V	GND
Green	Yellow	Brown	White	Red	Blue

42A Series Dimension (mm)

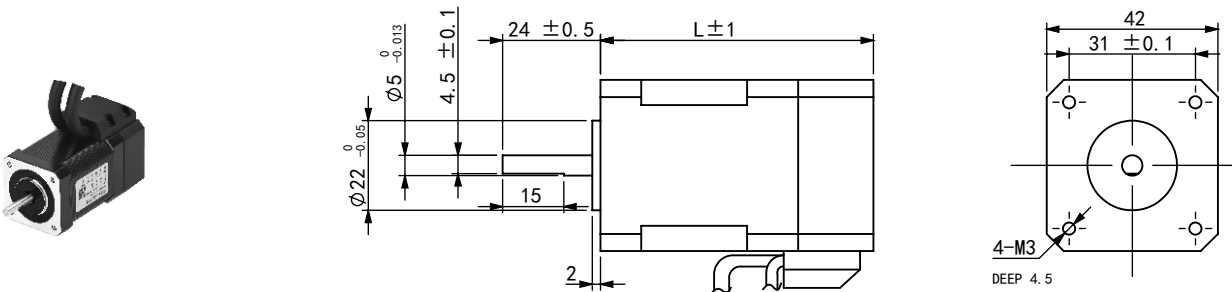

Torque-frequency Curve

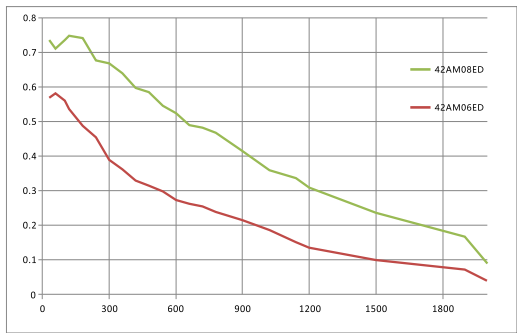

Drive: T42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600

Wiring Definition

A+	A-	B+	B-
Red	Blue	Green	Black


EB+	EB-	EA+	EA-	5V	GND
Green	Yellow	Brown	White	Red	Blue

■ 2-phase Stepper Motor 57mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/ Phase(Ohm)	Inductance/ Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
57AM13ED	1.8	1.3	4.0	0.4	1.6	260	8	22	77	0.8
57AM23ED	1.8	2.3	5.0	0.6	2.4	460	8	22	98	1.2
57AM26ED	1.8	2.6	5.0	0.5	2.1	520	8	22	106	1.4
57AM30ED	1.8	3.0	5.0	0.8	3.7	720	8	22	124	1.5
D57AM30ED	1.8	3.0	5.0	0.5	2.2	690	8	22	107	1.5

*NEMA 23 (57mm)


■ 57 Series Dimension (mm)

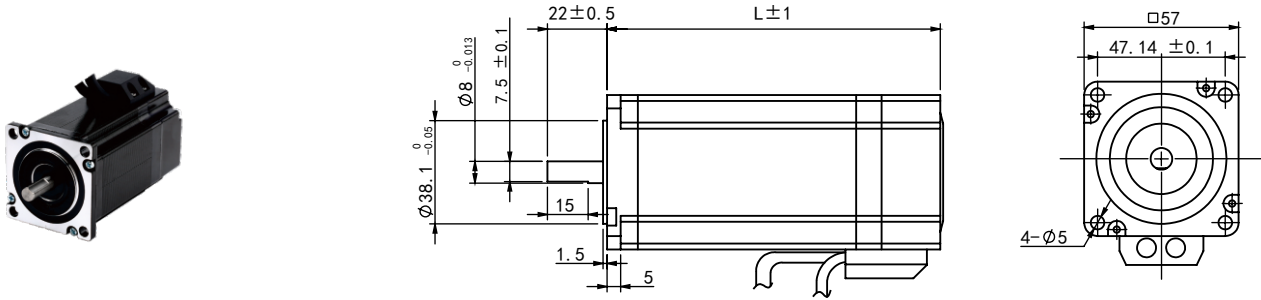

■ D57 Series Dimension (mm)

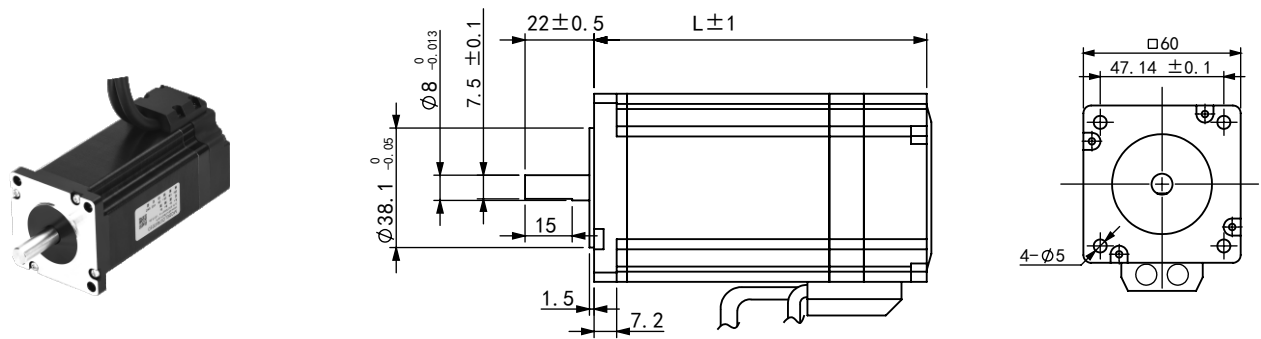

■ Torque-frequency Curve

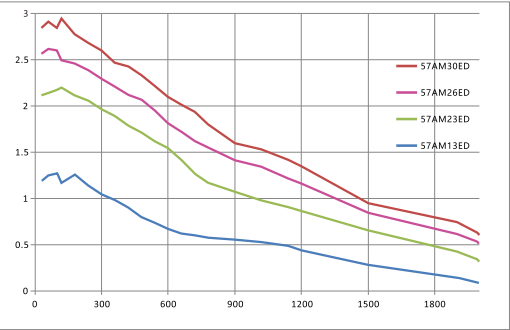

Drive: T60
Voltage: 36VDC
Current: Rated
Micro-stepping: 1600

■ Wiring Definition

A+	A-	B+	B-
Red	Blue	Green	Black


EB+	EB-	EA+	EA-	5V	GND
Green	Yellow	Brown	White	Red	Blue

■ 2-phase Stepper Motor 60mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/ Phase(Ohm)	Inductance/ Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
60AM22ED	1.8	2.2	5.0	0.4	1.3	330	8	22	79	1.1
60AM30ED	1.8	3.0	5.0	0.5	2.2	690	8	22	107	1.5
60AM40ED	1.8	4.0	5.0	0.9	3.5	880	10	30	123	2.1

*NEMA 24 (60mm)


■ 60 Series Dimension (mm)

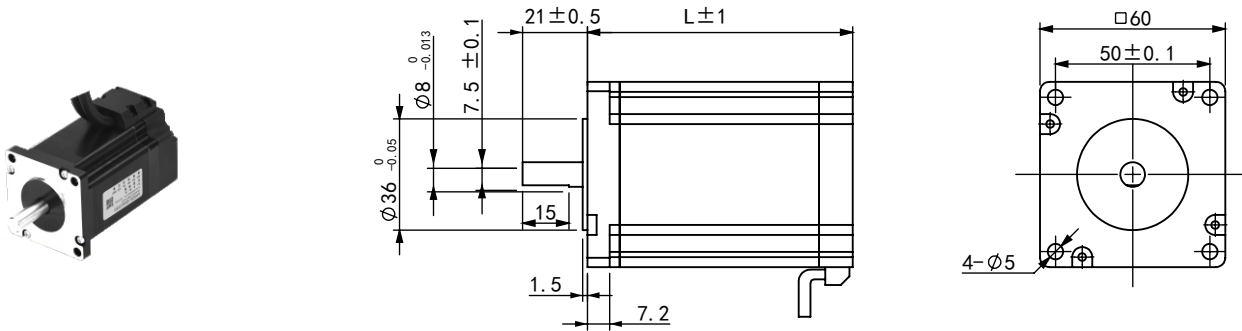

■ 60AM40ED Dimension (mm)

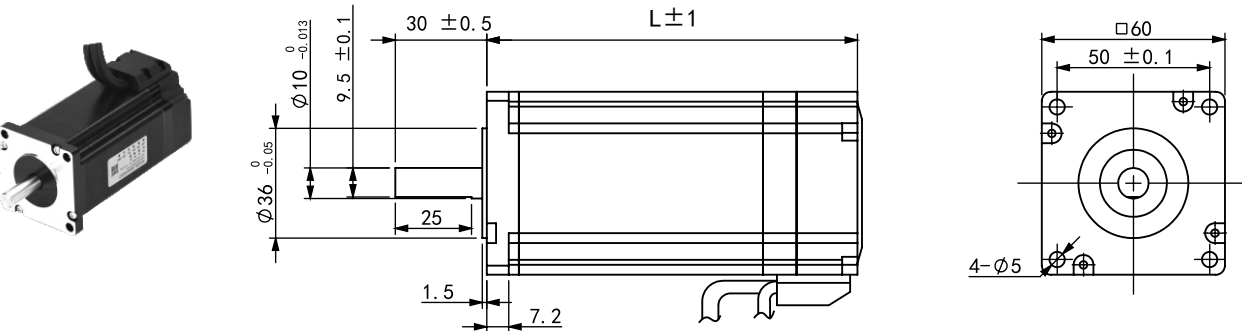

■ Torque-frequency Curve

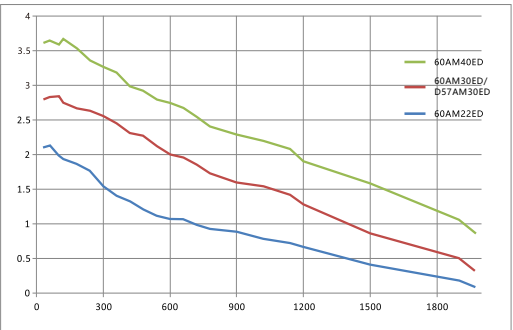

Drive: T60
Voltage: 48VDC
Current: Rated
Micro-stepping: 1600

■ Wiring Definition

A+	A-	B+	B-
Red	Blue	Green	Black


EB+	EB-	EA+	EA-	5V	GND
Green	Yellow	Brown	White	Red	Blue

■ 2-phase Stepper Motor 86mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
86AM45ED	1.8	4.5	6.0	0.4	2.8	1400	14	40	105	2.5
86AM65ED	1.8	6.5	6.0	0.5	4.2	2300	14	40	127	3.3
86AM85ED	1.8	8.5	6.0	0.5	5.5	2800	14	40	140	3.9
86AM100ED	1.8	10	6.0	0.8	5.3	3400	14	40	157	4.3
86AM120ED	1.8	12	6.0	0.7	8.3	4000	14	40	182	5.3

*NEMA 34 (86mm)

■ 60 Series Dimension (mm)

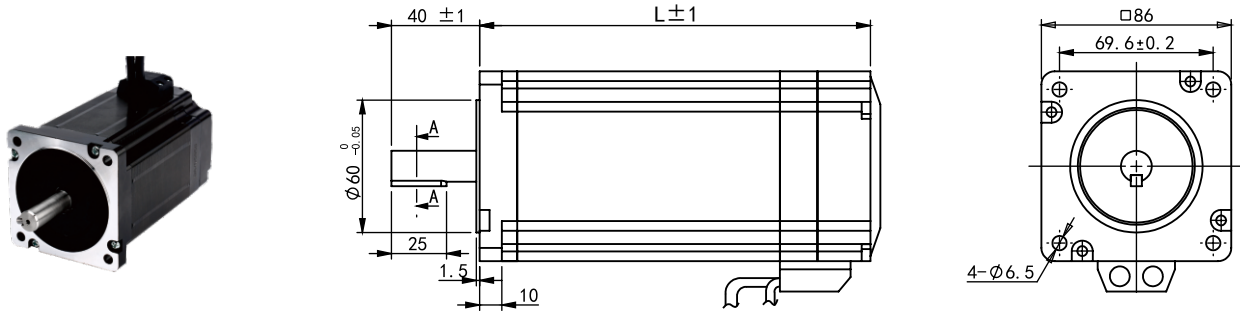

■ Torque-frequency Curve

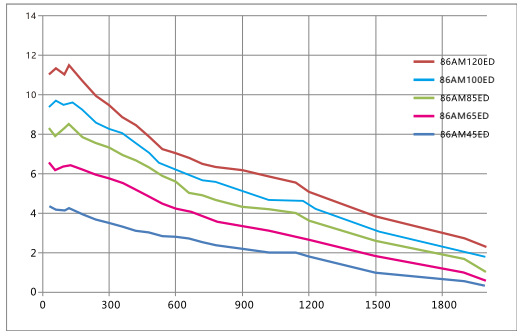

Drive: T86
Voltage: 60VAC
Current: Rated
Micro-stepping: 1600

■ Wiring Definition

A+	A-	B+	B-
Red	Blue	Green	Black


EB+	EB-	EA+	EA-	5V	GND
Green	Yellow	Brown	White	Red	Blue

■ 3-phase Stepper Motor 86/110mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
86B8EH	1.2	8.0	6.0	2.6	17.4	2940	14	40	150	5.0
86B10EH	1.2	10	6.0	2.7	18.9	4000	14	40	178	5.8
110B12EH	1.2	12	4.2	1.2	13.0	10800	19	40	162	9.0
110B20EH	1.2	20	5.2	1.9	18.0	17000	19	40	244	11.8

*NEMA 34 (86mm), NEMA 42 (110mm)

■ 86 Series Dimension (mm)

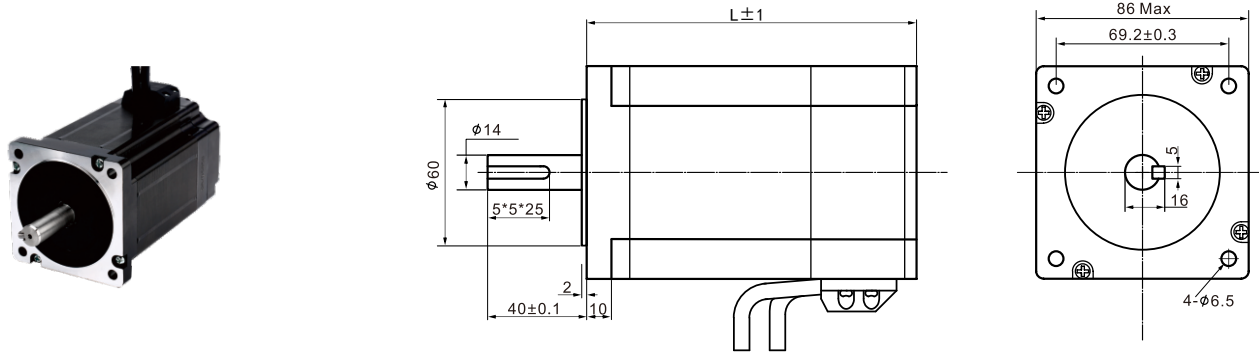

■ Torque-frequency Curve

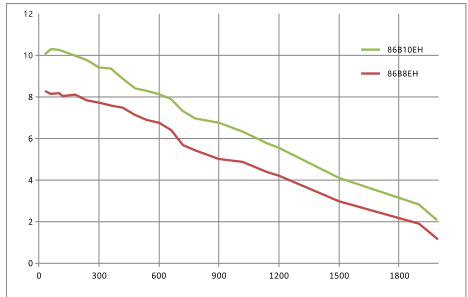


Drive: NT110
Voltage: 220VAC
Current: Rated
Micro-stepping: 1600

■ Wiring Definition


U	V	W
Black	Blue	Brown

EB+	EB-	EA+	EA-	VCC	GND
Yellow	Green	Brown	Blue	Red	Black

■ 110 Series Dimension (mm)

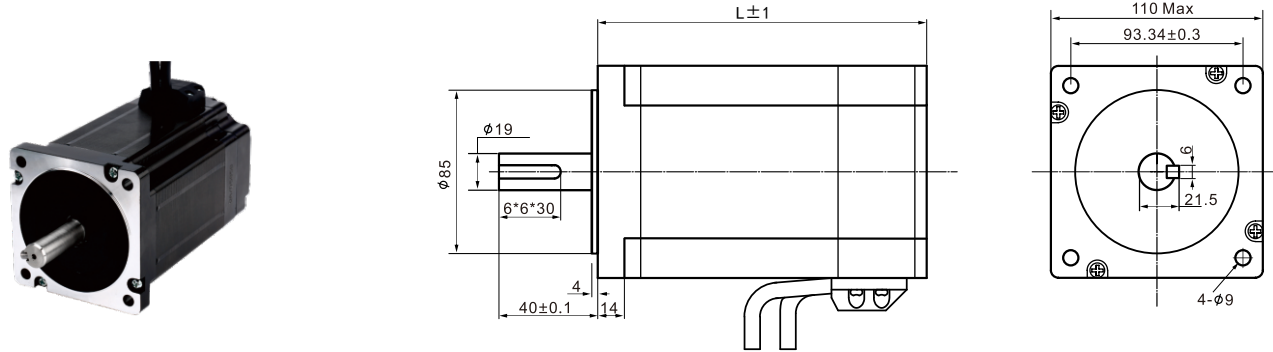

■ Torque-frequency Curve

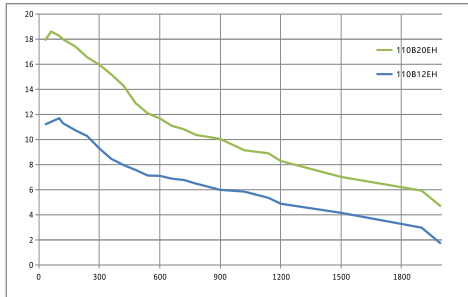

Drive: NT110
Voltage: 220VAC
Current: Rated
Micro-stepping: 1600

■ Wiring Definition


U	V	W	PE
Red	Blue	Black	Yellow

EB+	EB-	EA+	EA-	VCC	GND
Yellow	Green	Black	Blue	Red	White

Open Loop Stepper System


Stepper motor is a control motor whose operating speed and position can be determined. It operates step by step at a fixed angle (step angle) in rotation. Control switching pace of the step angle of stepper motor to control its operating speed and position.

The stepper drive is used for switching the pace of step angle of the stepper motor according to the specified sequence.

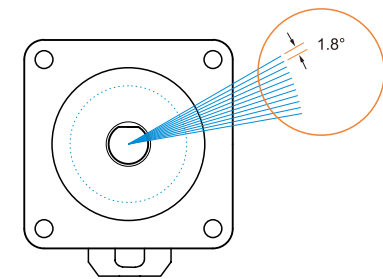


Schematic diagram of the step angle of a two-phase hybrid stepper motor.

System Diagram

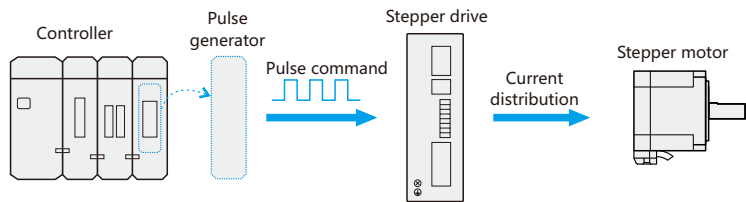


Features

Low resonance	Low temperature rise	Low noise
lowering down the vibration amplitude of motor low speed resonance area , with Low speed anti-resonance algorithm.	Under the same conditions, the digital drive features smoother current waveform, smaller current fluctuation and low temperature rise.	Built-in S-shaped command smoothing and low-speed micro-stepping technology, reduce the vibration amplitude of each speed range.

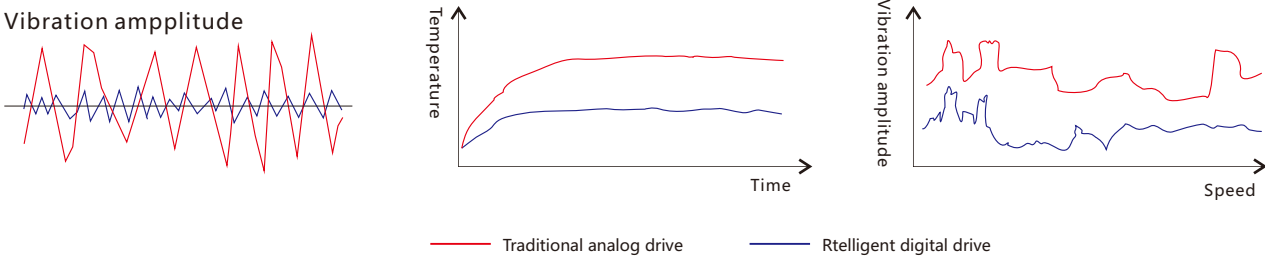


Function Description

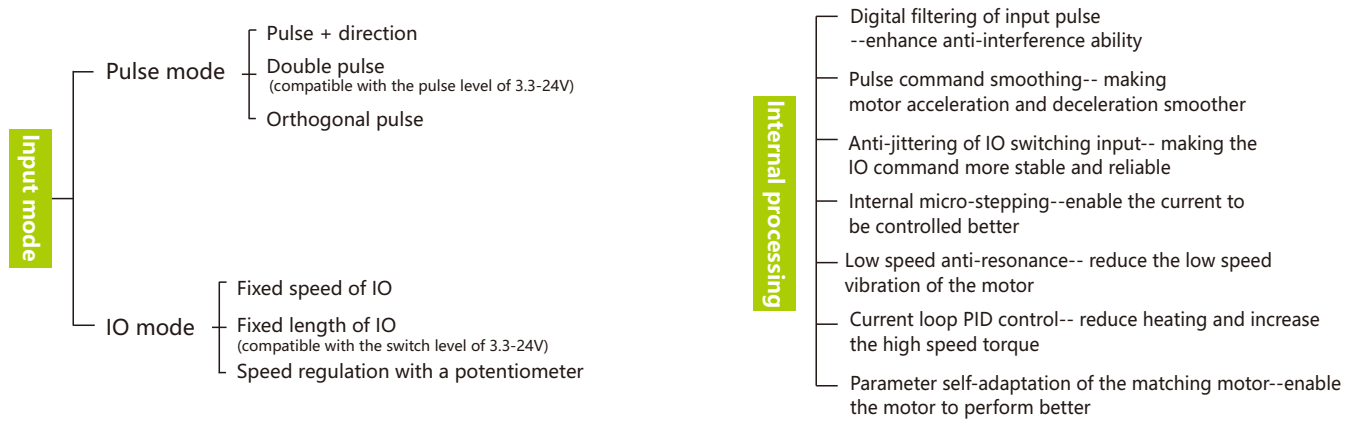

Open Loop Stepper Drive

Based on the new 32-bit DSP platform and adopting the micro-stepping technology and PID current control algorithm design, Rteligent R series stepper drive surpasses the performance of common analog stepper drive comprehensively.

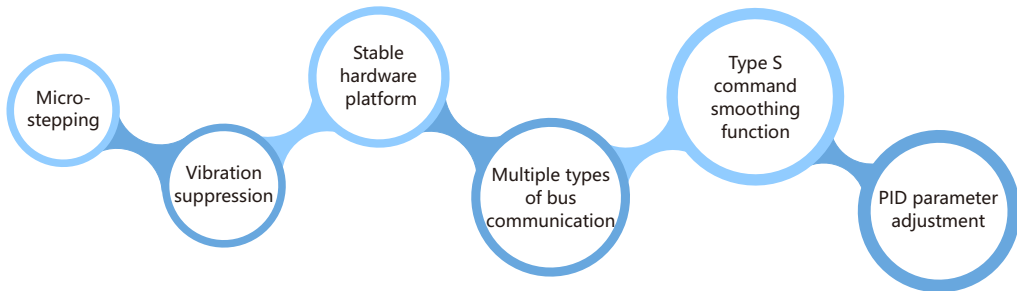

Naming Rule

3

1

R

2

110

3

PLUS

4

-

5

1

2 phase(omitted)

3

3 phase

5

5 phase

2

Serial Name

3

Match the motor flange size

4

Upgraded version

5

Function code

X2

Two-in-one

X3

Three-in-one

IO

Switch

D

One-drive-two

*Model naming rules are only used for model meaning analysis. For specific optional models, please refer to the details page.

Product Series

R Series

R series pulse-controlled stepper motor drive

- Matching motor base in 20mm-130mm
- Full digital Micro-stepping technology
- Pulse compatible with 5-24V
- Smooth motion & low vibration
- Auto- tuning of motor parameters
- Optimized anti-interference ability
- Better hardware design and reliability

R-IO/R-IR Series

R-IO series switching stepper drive

- Matching motor base in 20-130mm
- 5-24V switch control
- 16 speed adjustable

R-IR series potentiometer speed-control stepper drive

- Matching motor base below 86mm
- 5-24V switch control
- Regulate speed online via potentiometer

Multi-axis Series

R-D series one-drive-two switch speed-control drive

- Matching motors base below 60mm
- 5-24V switch control
- Regulate speed online via potentiometer


R-X2/X3 series multi-axis pulse stepper drive

- Matching motors base below 60mm
- Pulse control
- Smaller size


■ Technical Specifications

Model	Peak current A	Weight kg	Input voltage range	Dimension mm	Micro-stepping	Pulse level	Matching motor
R42	2.2	0.1	18-48VDC	92.6×56×21	200-25000	3.3-24V	Open loop below 42mm
R57	5.0	0.3	18-50VDC	118×76×33	400-25000	3.3-24V	Open loop below 57mm
R60	5.6	0.3	18-50VDC	118×76×33	200-25000	3.3-24V	Open loop below 60mm
R60-AL	5.6	0.2	18-50VDC	116×69×26.5	200-25000	24V/5V	Open loop below 60mm
R86	7.2	0.6	18-80VAC	151×97×52	400-40000	3.3-24V	Open loop below 86mm
R86mini	7.2	0.3	18-80VAC	119×77×35	400-40000	3.3-24V	Open loop below 86mm
R110PLUS	8.0	0.9	110-230VAC	178×109×68	400-25000	3.3-24V	Open loop below 110mm
R130	8.0	1.3	110-230VAC	203×147×78	400-60000	3.3-24V	Open loop below 130mm
3R60	8.0	0.3	18-50VDC	118×76×33	200-25000	3.3-24V	Open loop 3 phase below 60mm
3R110PLUS	7.2	0.9	110-230VAC	178×109×68	500-60000	3.3-24V	Open loop 3 phase below 110mm
3R130	8.0	1.3	110-230VAC	203×147×78	400-60000	3.3-24V	Open loop 3 phase below 130mm

■ Control Signal Wiring Example

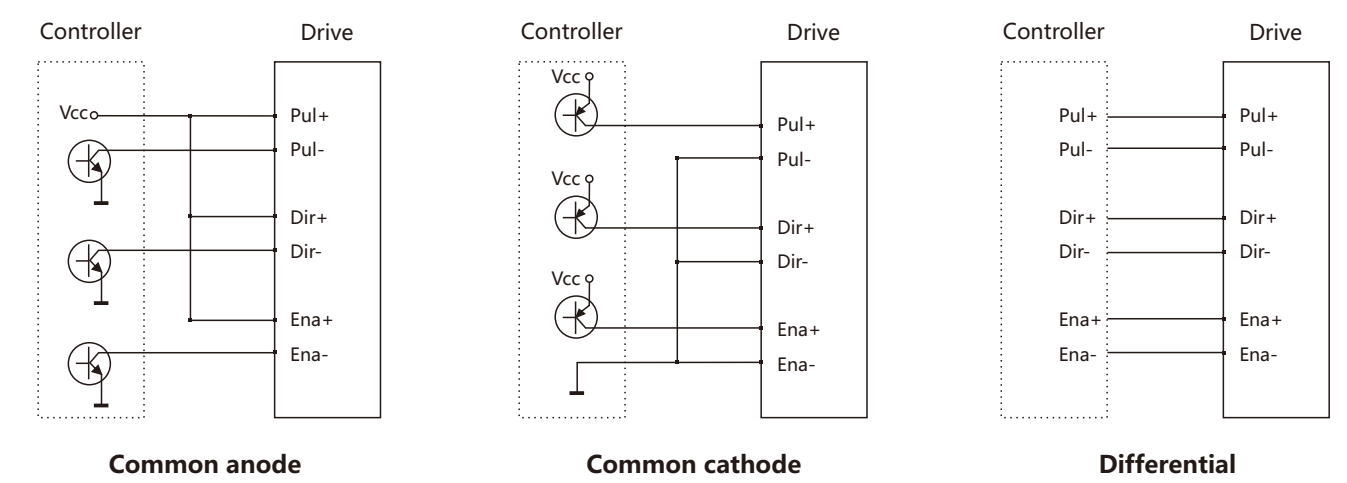

■ Output Signal Wiring Example

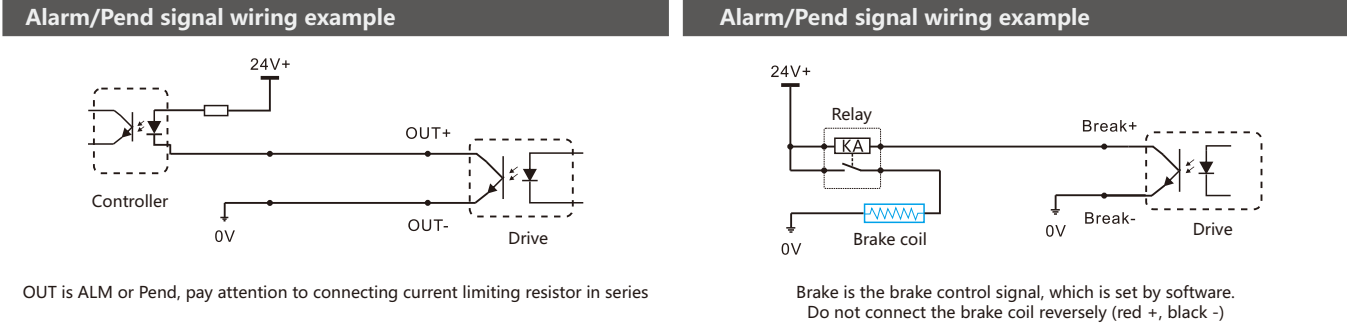

■ LED Indication

LED status	Drive status	Fault handling
● Steady green light	Drive not enabled	
●● Flashing green light	Drive works fine	
●● 1 green 1 red	Drive overcurrent	Check wiring, repair drive
●●● 1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
●●●● 1 green 3 red	Drive internal voltage error	Drive failure
●●●●●●● 1 green 7 red	Motor phase loss	Check the wiring terminal and confirm the extension cable connector


R42

The R42 digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters. The drive features low noise, low vibration and low heating.

It is used to drive two-phase stepper motors base below 42mm.

- Pulse mode: PUL&DIR
- Signal level: 3.3~24V compatible; series resistance not required for the application of PLC.
- Power voltage: 18-48V DC supply; 24 or 36V recommended.
- Typical applications: marking machine, soldering machine, laser, 3D printing, visual localization, automatic assembly equipment, etc.


■ Drive Interface & Connection

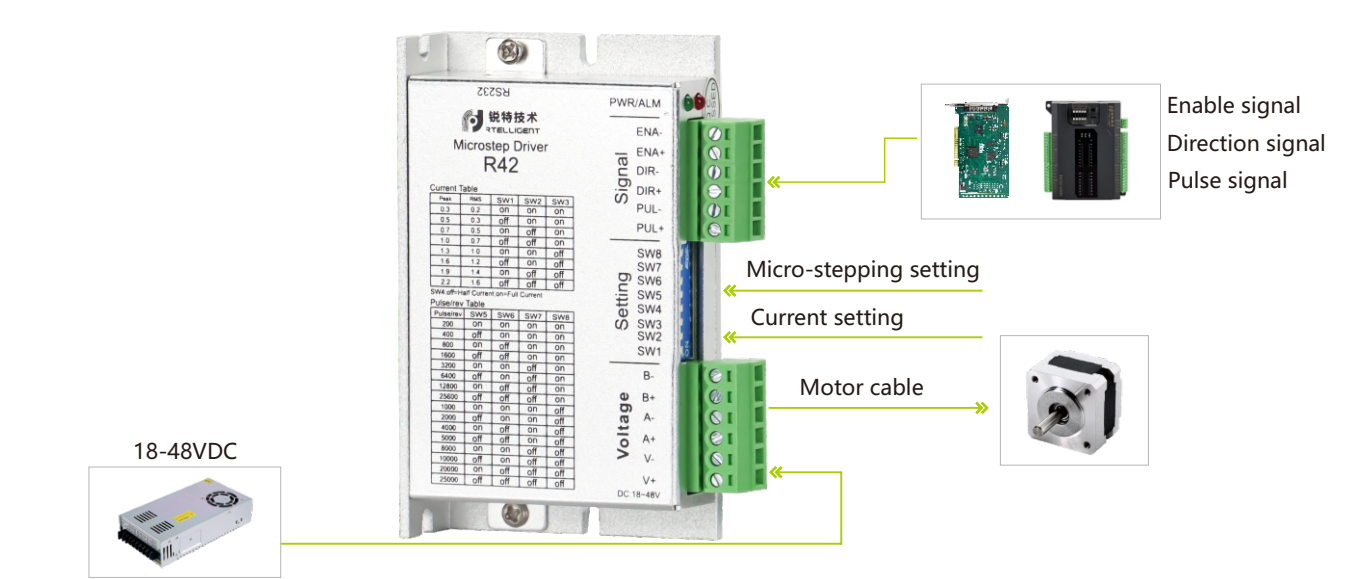

■ Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
0.3A	0.2A	on	on	on
0.5A	0.3A	off	on	on
0.7A	0.5A	on	off	on
1.0A	0.7A	off	off	on
1.3A	1.0A	on	on	off
1.6A	1.2A	off	on	off
1.9A	1.4A	on	off	off
2.2A	1.6A	off	off	off

■ Installation Dimension

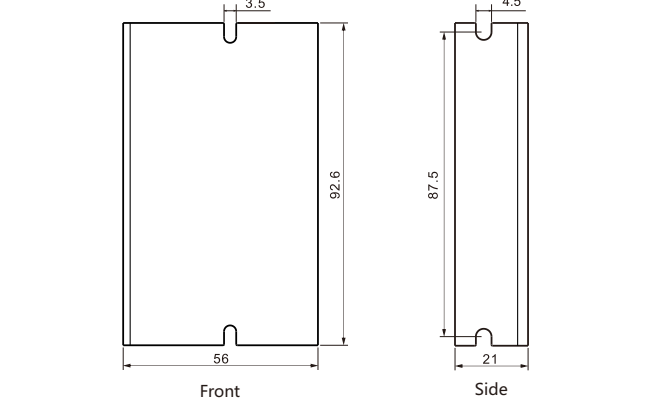

■ Semi-/full Current Selection

	SW4
off Semi-current	The idle current is half of the operating current
on Full Current	The idle current is equal to the operating current

■ Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
200	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off


When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.

R57

The R57 digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters. The drive features low noise, low vibration, low heating and high-speed high torque output. It is used to drive two-phase stepper motors base below 57mm.

- Pulse mode: PUL&DIR
- Signal level: 3.3~24V compatible; series resistance not required for the application of PLC
- Power voltage: 18-50V DC supply; 36 or 48V recommended
- Typical applications : engraving machine , marking machine, cutting machine, plotter, laser, auto assembly equipment, etc


Drive Interface & Connection

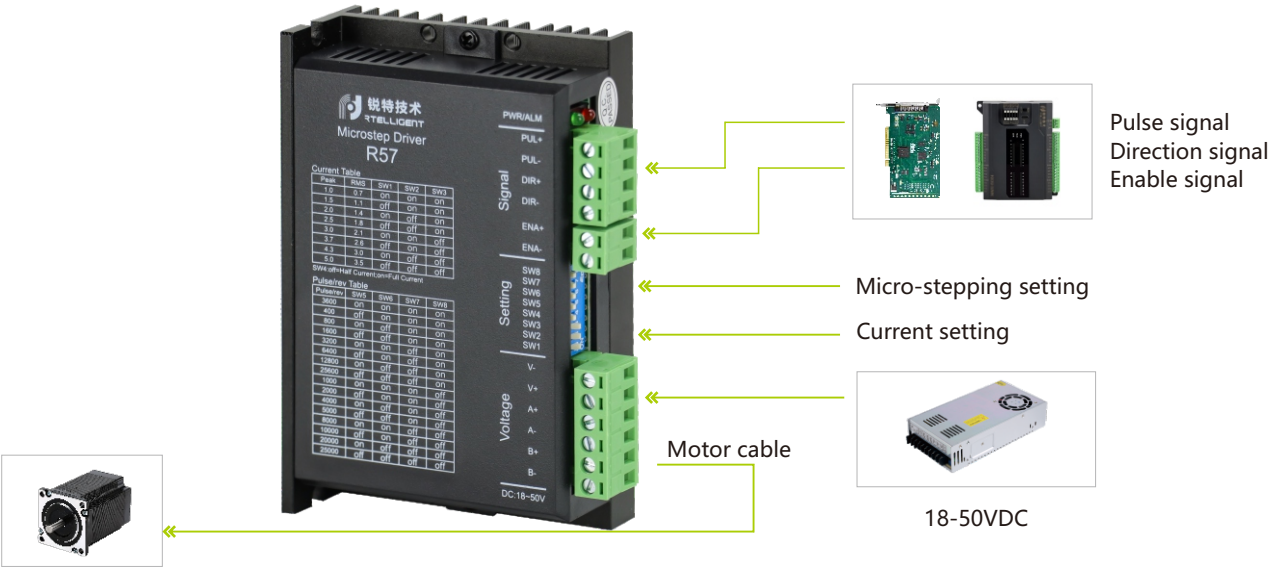

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
1.0A	0.7A	on	on	on
1.5A	1.1A	off	on	on
2.0A	1.4A	on	off	on
2.5A	1.8A	off	off	on
3.0A	2.1A	on	on	off
3.7A	2.6A	off	on	off
4.3A	3.0A	on	off	off
5.0A	3.5A	off	off	off

Installation Dimension

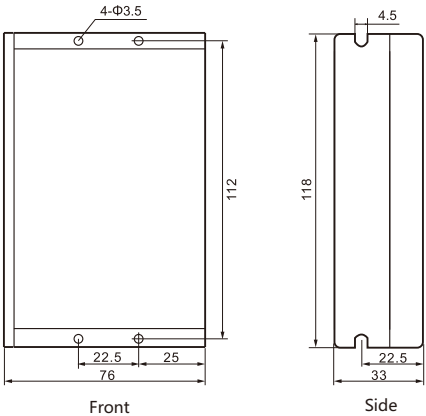

Semi-/full Current Selection

SW4		
off	Semi-current	The idle current is half of the operating current
on	Full Current	The idle current is equal to the operating current

Micro-stepping Setting


Pulse/rev	SW5	SW6	SW7	SW8
3600	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off

R60

The R60 digital 2-phase stepper drive is based on 32-bit DSP platform,with built-in micro-stepping technology & auto tuning of parameters. The drive features low noise, low vibration, low heating and high-speed high torque output. It is used to drive two-phase stepper motors base below 60mm.

- Pulse mode: PUL&DIR
- Signal level: 3.3~24V compatible; series resistance not necessary for the application of PLC.
- Power voltage: 18-50V DC supply; 36 or 48V recommended.
- Typical applications : Engraving machine , marking machine, cutting machine, plotter, laser, auto assembly equipment, etc.


Drive Interface & Connection

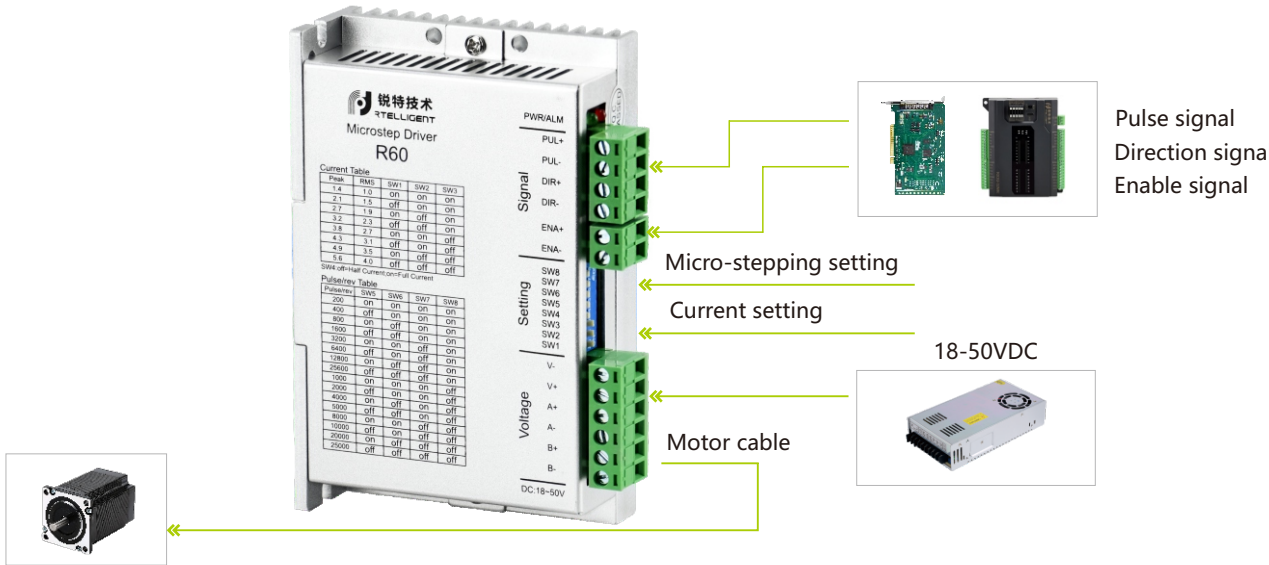

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
1.4A	1.0A	on	on	on
2.1A	1.5A	off	on	on
2.7A	1.9A	on	off	on
3.2A	2.3A	off	off	on
3.8A	2.7A	on	on	off
4.3A	3.1A	off	on	off
4.9A	3.5A	on	off	off
5.6A	4.0A	off	off	off

Installation Dimension

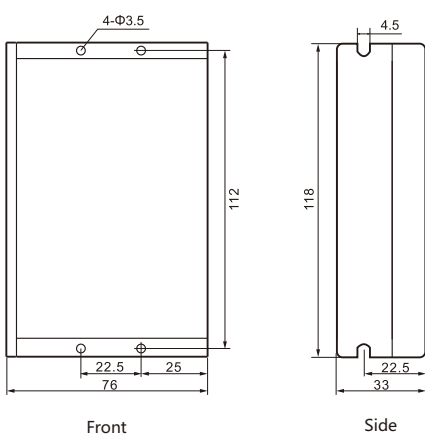

Semi-/full Current Selection

SW4		
off	Semi-current	The idle current is half of the operating current
on	Full Current	The idle current is equal to the operating current

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
200	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off


R60-AL

The R60-AL digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters. The drive features low noise, low vibration, low heating and high-speed high torque output.

It is used to drive two-phase stepper motors base below 60mm.

- Pulse mode: PUL&DIR
- Signal level: Default 24V, 5V model R60-AL-5V
- Power voltage: 18-50V DC supply; 36 or 48V recommended.
- Typical applications: engraving machine, marking machine, cutting machine, plotter, laser, auto assembly equipment, etc.


Drive Interface & Connection

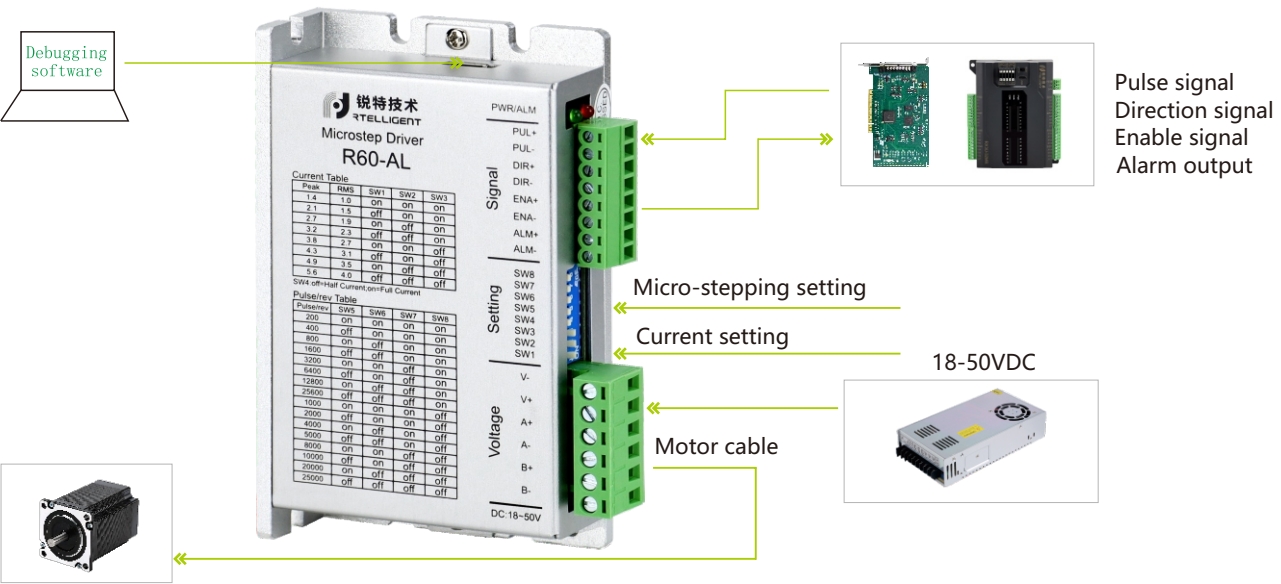

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
1.4A	1.0A	on	on	on
2.1A	1.5A	off	on	on
2.7A	1.9A	on	off	on
3.2A	2.3A	off	off	on
3.8A	2.7A	on	on	off
4.3A	3.1A	off	on	off
4.9A	3.5A	on	on	off
5.6A	4.0A	off	off	off

Installation Dimension

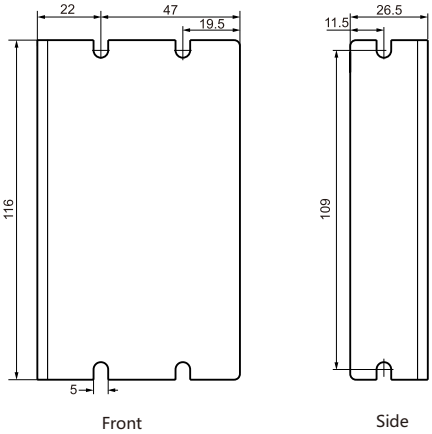

Semi-/full Current Selection

	SW4
off Semi-current	The idle current is half of the operating current
on Full Current	The idle current is equal to the operating current

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
200	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off

When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.


R86

The R86 digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters. The drive features low noise, low vibration, low heating and high-speed high torque output.

It is used to drive two-phase stepper motors base below 86mm.

- Pulse mode: PUL&DIR
- Signal level: 3.3~24V compatible; series resistance not required for the application of PLC.
- Power voltage: 24~100V DC or 18~80V AC; 60V AC recommended.
- Typical applications: engraving machine, labeling machine, cutting machine, plotter, laser, automatic assembly equipment, etc.


Drive Interface & Connection

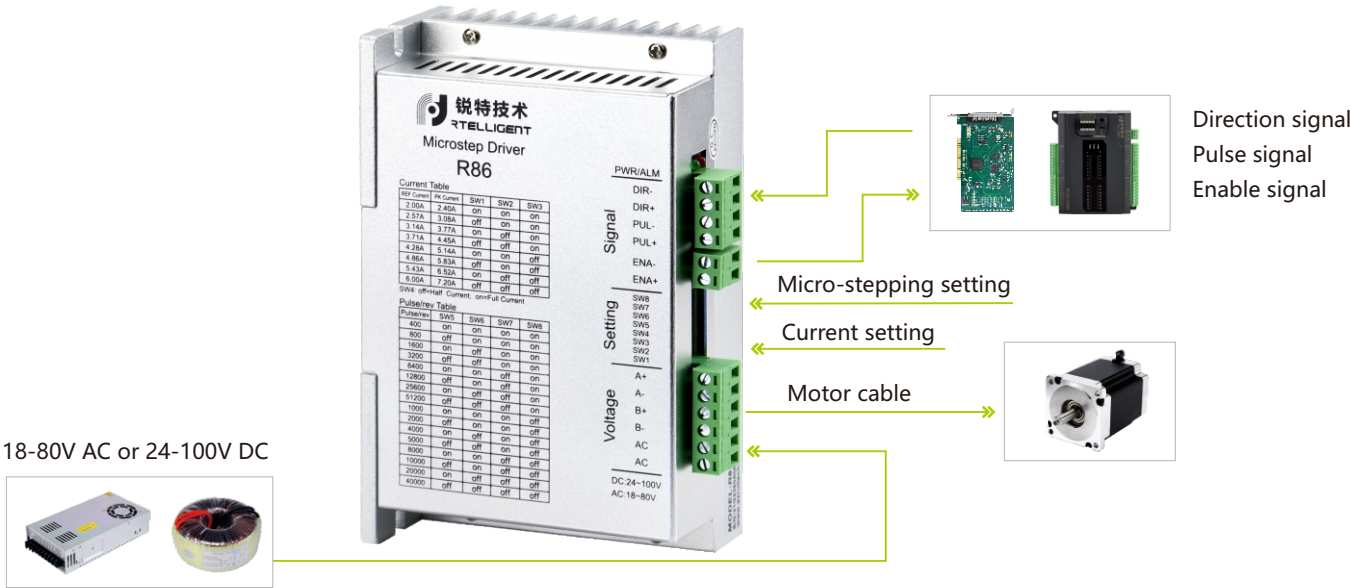

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
2.40A	2.00A	on	on	on
3.08A	2.57A	off	on	on
3.77A	3.14A	on	off	on
4.45A	3.71A	off	off	on
5.14A	4.28A	on	on	off
5.83A	4.86A	off	on	off
6.52A	5.43A	on	off	off
7.20A	6.00A	off	off	off

Installation Dimension

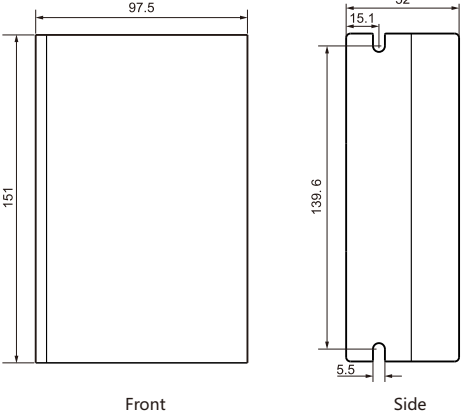

Semi-/full Current Selection

	SW4
off Semi-current	The idle current is half of the operating current
on Full Current	The idle current is equal to the operating current

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
400	on	on	on	on
800	off	on	on	on
1600	on	off	on	on
3200	off	off	on	on
6400	on	on	off	on
12800	off	on	off	on
25600	on	off	off	on
51200	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
40000	off	off	off	off


R86MINI

Compared with R86, the R86mini digital two-phase stepper drive adds alarm output and USB debugging ports. smaller size, easier to use.

R86mini is used to drive two-phase stepper motors base below 86mm.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; series resistance not required for the application of PLC.
- Power voltage: 24~100V DC or 18~80V AC; 60V AC recommended.
- Typical applications: engraving machine, labeling machine, cutting machine, plotter, laser, automatic assembly equipment, etc.


Drive Interface & Connection

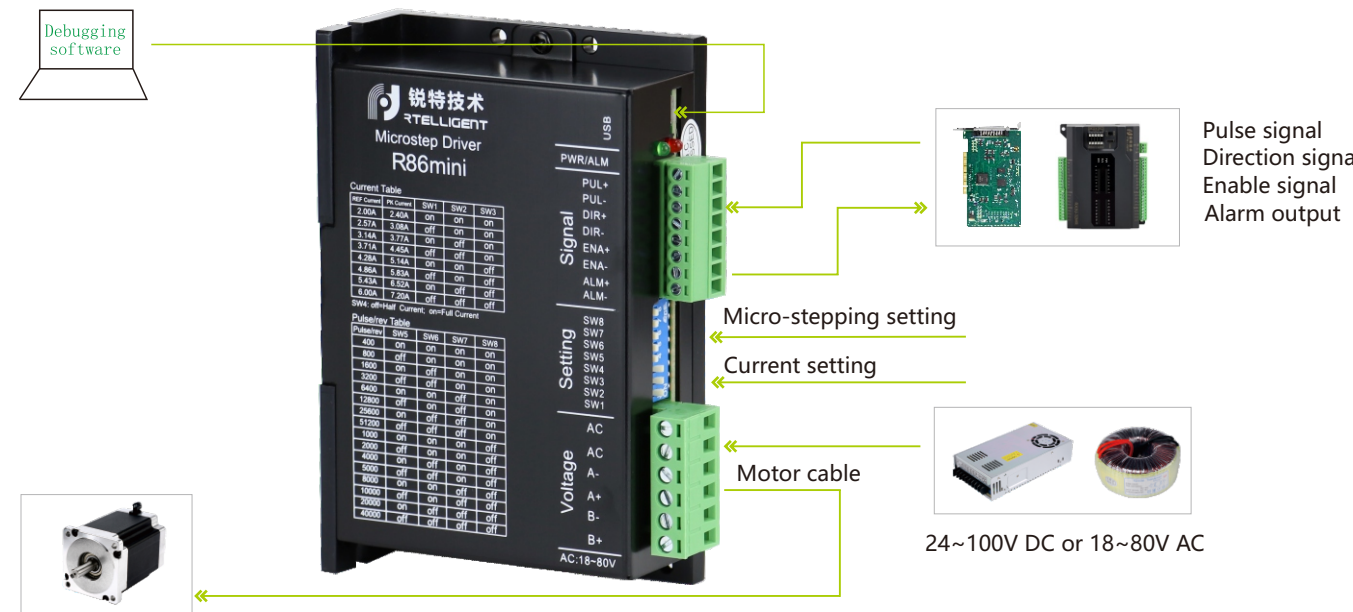

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
2.40A	2.00A	on	on	on
3.08A	2.57A	off	on	on
3.77A	3.14A	on	off	on
4.45A	3.71A	off	off	on
5.14A	4.28A	on	on	off
5.83A	4.86A	off	on	off
6.52A	5.43A	on	off	off
7.20A	6.00A	off	off	off

Installation Dimension

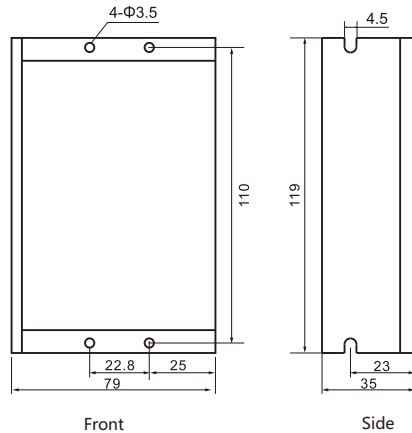

Semi-/full Current Selection

		SW4
off	Semi-current	The idle current is half of the operating current
on	Full Current	The idle current is equal to the operating current

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
400	on	on	on	on
800	off	on	on	on
1600	on	off	on	on
3200	off	off	on	on
6400	on	on	off	on
12800	off	on	off	on
25600	on	off	off	on
51200	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
40000	off	off	off	off


R110PLUS

The R110PLUS digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters, featuring of low noise, low vibration, low heating and high-speed high torque output. It can fully play the performance of two-phase high-voltage stepper motor.

R110PLUS V3.0 version added the DIP matching motor parameters function, can drive 86/110 two-phase stepper motor.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; series resistance not necessary for the application of PLC.
- Power voltage: 110~230V AC; 220V AC recommended, with superior high-speed performance.
- Typical applications: engraving machine, labeling machine, cutting machine, plotter, laser, automatic assembly equipment, etc.

Drive Interface & Connection

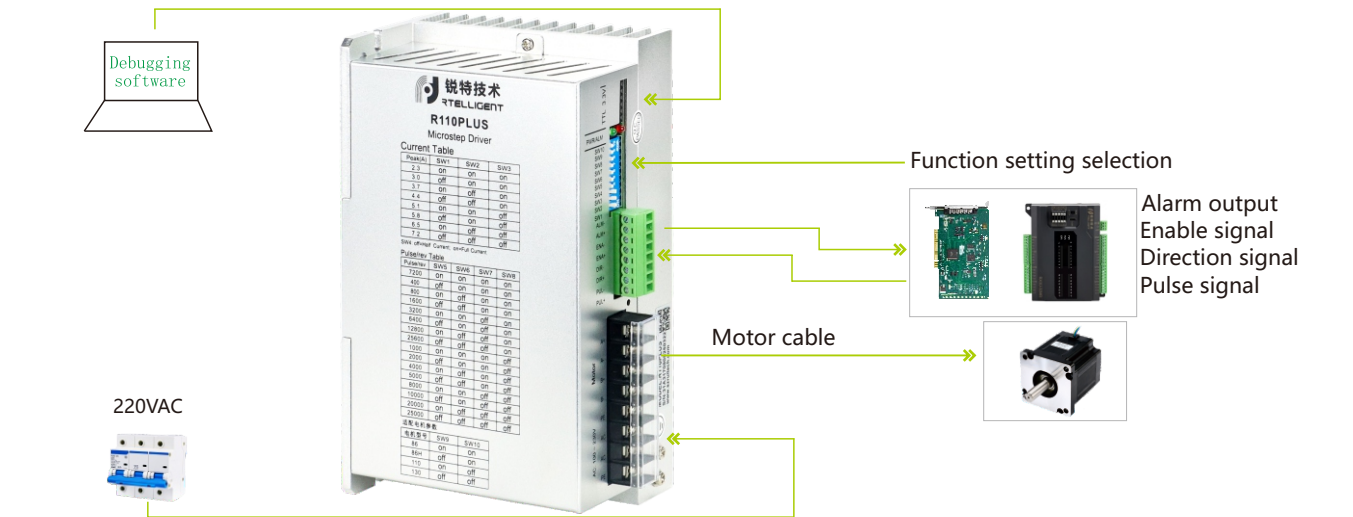


Working Current Setting

Output current	SW1	SW2	SW3
2.3A	on	on	on
3.0A	off	on	on
3.7A	on	off	on
4.4A	off	off	on
5.1A	on	on	off
5.8A	off	on	off
6.5A	on	off	off
7.2A	off	off	off

Semi-/full Current Selection

		SW4
off	Semi-current	The idle current is half of the operating current
on	Full Current	The idle current is equal to the operating current

Installation Dimension

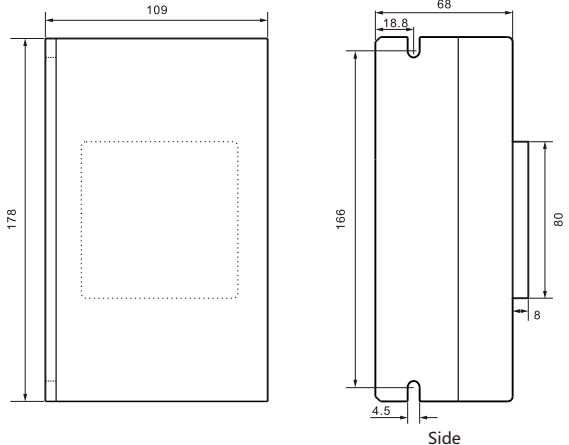

Function Selection

R110PLUS V3.0		
Motor specification	SW9	SW10
86	on	on
86H	off	on
110	on	off
130	off	off

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
7200	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off

When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.


R130

The R130 digital 2-phase stepper drive is based on 32-bit DSP platform, with built-in micro-stepping technology & auto tuning of parameters, featuring of low noise, low vibration, low heating and high-speed high torque output. It can be used in most applications of stepper motor.

R130 is used to drive two-phase stepper motors base below 130mm.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; series resistance not required for the application of PLC.
- Power voltage: 110~230V AC;
- Typical applications: engraving machine, cutting machine, screen printing equipment, CNC machine, automatic assembly equipment, etc.


Drive Interface & Connection

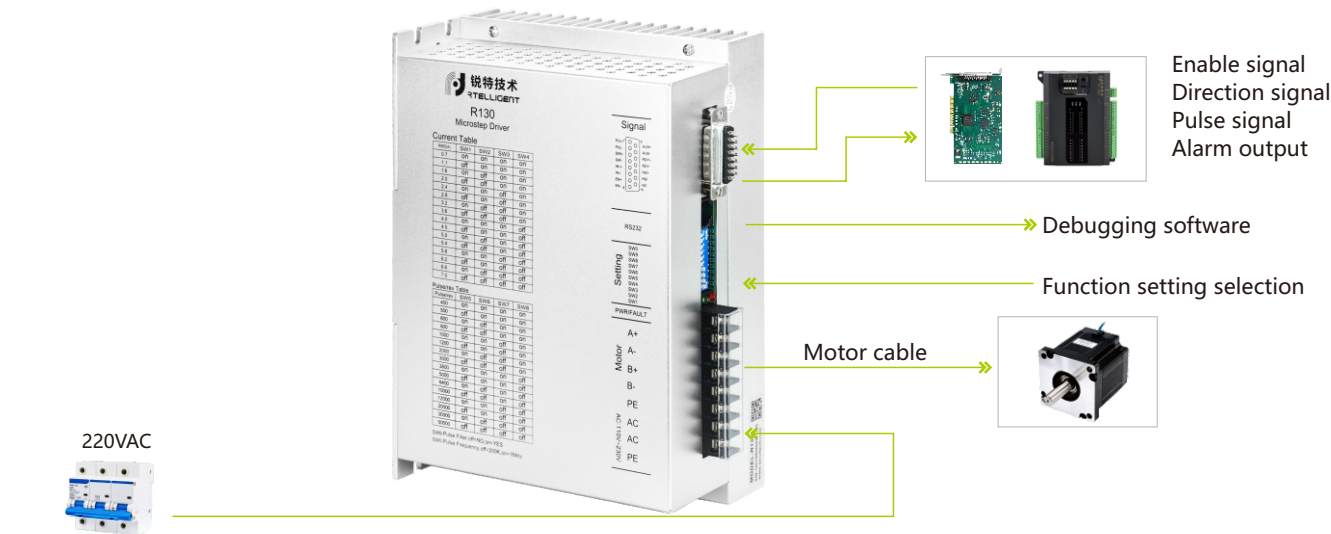

Working Current Setting

RMS(A)	SW1	SW2	SW3	SW4
0.7	on	on	on	on
1.1	off	on	on	on
1.6	on	off	on	on
2.0	off	off	on	on
2.4	on	on	off	on
2.8	off	on	off	on
3.2	on	off	off	on
3.6	off	off	off	on
4.0	on	on	on	off
4.5	off	on	on	off
5.0	on	off	on	off
5.4	off	off	on	off
5.8	on	on	off	off
6.2	off	on	off	off
6.6	on	off	off	off
7.0	off	off	off	off

Installation Dimension

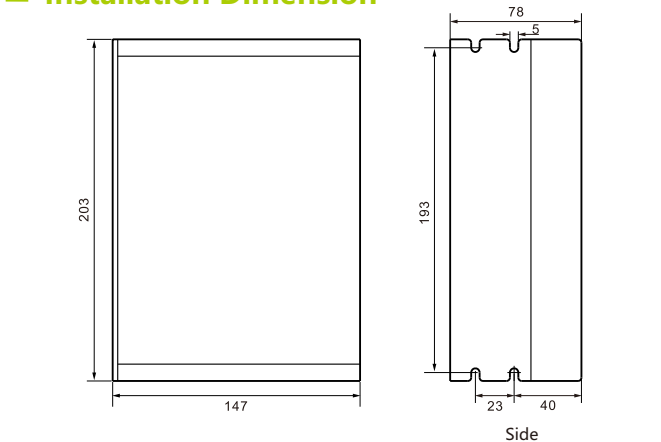

Function Selection

Filter selection			SW9
off	No filtering	Command smooth close	
on	With filtering	Command smooth open	
Max pulse frequency selection			SW0
off	Max frequency 200KHz	on	Max frequency 1MHz

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
400	on	on	on	on
500	off	on	on	on
600	on	off	on	on
800	off	off	on	on
1000	on	on	off	on
1200	off	on	off	on
2000	on	off	off	on
3000	off	off	off	on
3600	on	on	on	off
5000	off	on	on	off
6400	on	off	on	off
10000	off	off	on	off
12000	on	on	off	off
20000	off	on	off	off
30000	on	off	off	off
60000	off	off	off	off

When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.


3R60

The 3R60 digital 3-phase stepper drive is based on patented three-phase demodulation algorithm, with built-in micro-stepping technology, featuring low speed resonance, small torque ripple. It can fully play the performance of three-phase stepper motor.

3R60 is used to drive three-phase stepper motors base below 60mm.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; Series resistance not required for the application of PLC.
- Power voltage: 18-50V DC; 36 or 48V recommended.
- Typical applications: dispenser, soldering machine, engraving machine, laser cutting machine, 3D printer, etc.


Drive Interface & Connection

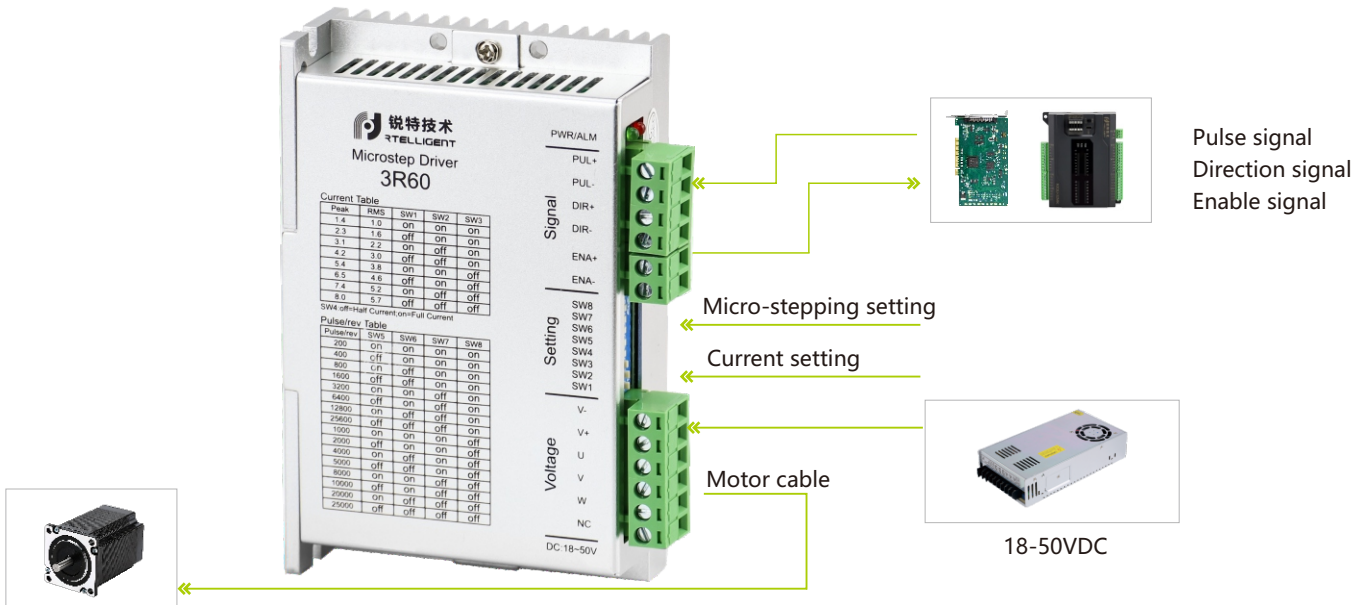

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
1.4A	1.0A	on	on	on
2.3A	1.6A	off	on	on
3.1A	2.2A	on	off	on
4.2A	3.0A	off	off	on
5.4A	3.8A	on	on	off
6.5A	4.6A	off	on	off
7.4A	5.2A	on	off	off
8.0A	5.7A	off	off	off

Installation Dimension

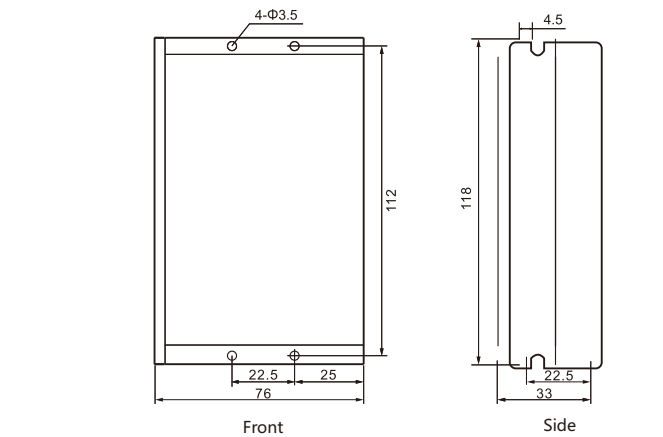

Semi-/full Current Selection

			SW4
off	Semi-current	The idle current is half of the operating current	
on	Full Current	The idle current is equal to the operating current	

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
200	on	on	on	on
400	off	on	on	on
800	on	off	on	on
1600	off	off	on	on
3200	on	on	off	on
6400	off	on	off	on
12800	on	off	off	on
25600	off	off	off	on
1000	on	on	on	off
2000	off	on	on	off
4000	on	off	on	off
5000	off	off	on	off
8000	on	on	off	off
10000	off	on	off	off
20000	on	off	off	off
25000	off	off	off	off


3R110PLUS

The 3R110PLUS digital 3-phase stepper drive is based on patented three-phase demodulation algorithm. with built-in micro-stepping technology, featuring low speed resonance, small torque ripple and high torque output. It can fully play the performance of three-phase stepper motors.

3R110PLUS V3.0 version added the DIP matching motor parameters function, can drive 86/110 two-phase stepper motor.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; series resistance not necessary for the application of PLC.
- Power voltage: 110~230V AC; 220V AC recommended, with superior high-speed performance.
- Typical applications: engraving machine, labeling machine, cutting machine, plotter, laser, automatic assembly equipment, etc.

Drive Interface & Connection

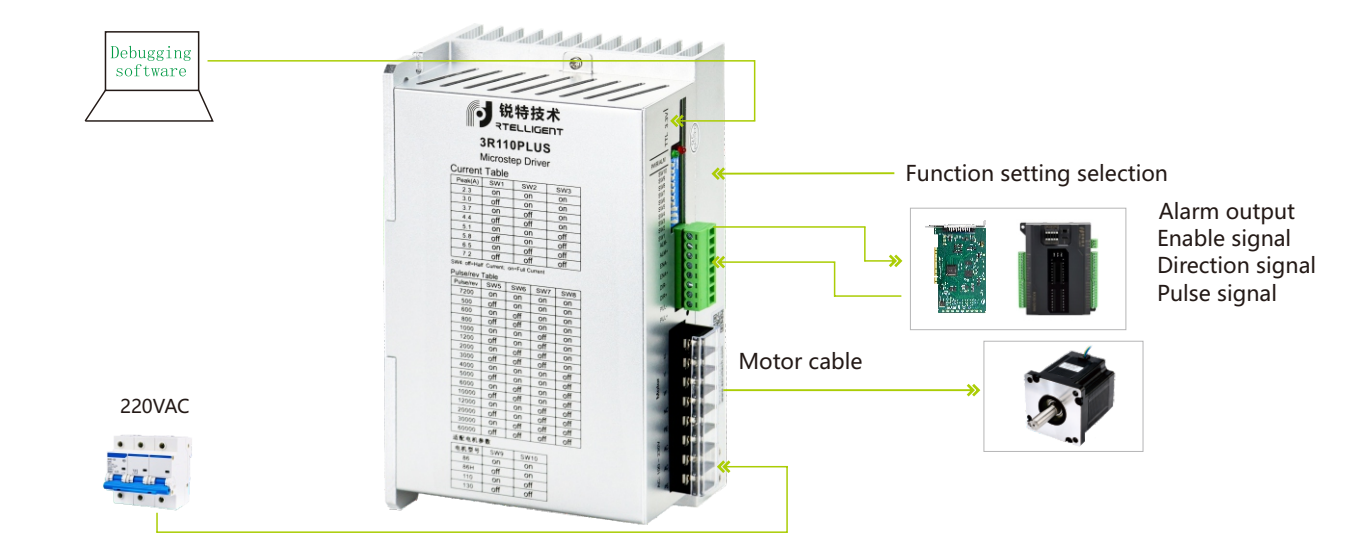


Working Current Setting

Output current	SW1	SW2	SW3
2.3A	on	on	on
3.0A	off	on	on
3.7A	on	off	on
4.4A	off	off	on
5.1A	on	on	off
5.8A	off	on	off
6.5A	on	off	off
7.2A	off	off	off

Semi-/full Current Selection

	SW4
off	Semi-current The idle current is half of the operating current
on	Full Current The idle current is equal to the operating current

Installation Dimension

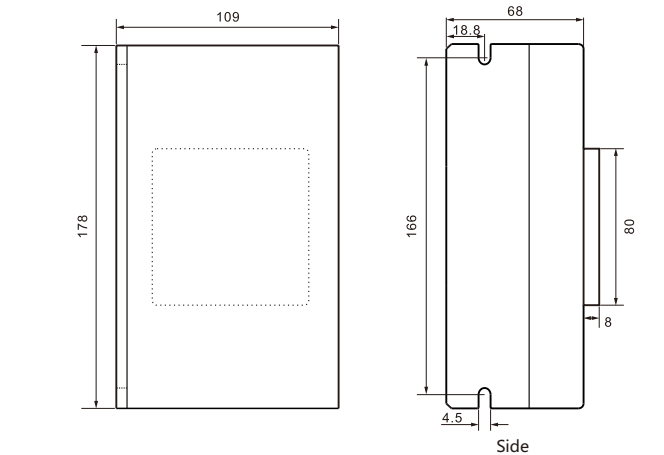

Function Selection

3R110PLUS V3.0		
Motor specification	SW9	SW10
86	on	on
86H	off	on
110	on	off
130	off	off

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
7200	on	on	on	on
500	off	on	on	on
600	on	off	on	on
800	off	off	on	on
1000	on	on	off	on
1200	off	on	off	on
2000	on	off	off	on
3000	off	off	off	on
4000	on	on	on	off
5000	off	on	on	off
6000	on	off	on	off
10000	off	off	on	off
12000	on	on	off	off
20000	off	on	off	off
30000	on	off	off	off
60000	off	off	off	off

When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.


3R130

The 3R130 digital 3-phase stepper drive is based on patented three-phase demodulation algorithm, with built-in micro-stepping technology, featuring low speed resonance, small torque ripple. It can fully play the performance of three-phase stepper motors.

3R130 is used to drive three-phase stepper motors base below 130mm.

- Pulse mode: PUL & DIR
- Signal level: 3.3~24V compatible; series resistance not necessary for the application of PLC.
- Power voltage: 110~230V AC;
- Typical applications: engraving machine, cutting machine, screen printing equipment, CNC machine, automatic assembly equipment, etc.


Drive Interface & Connection

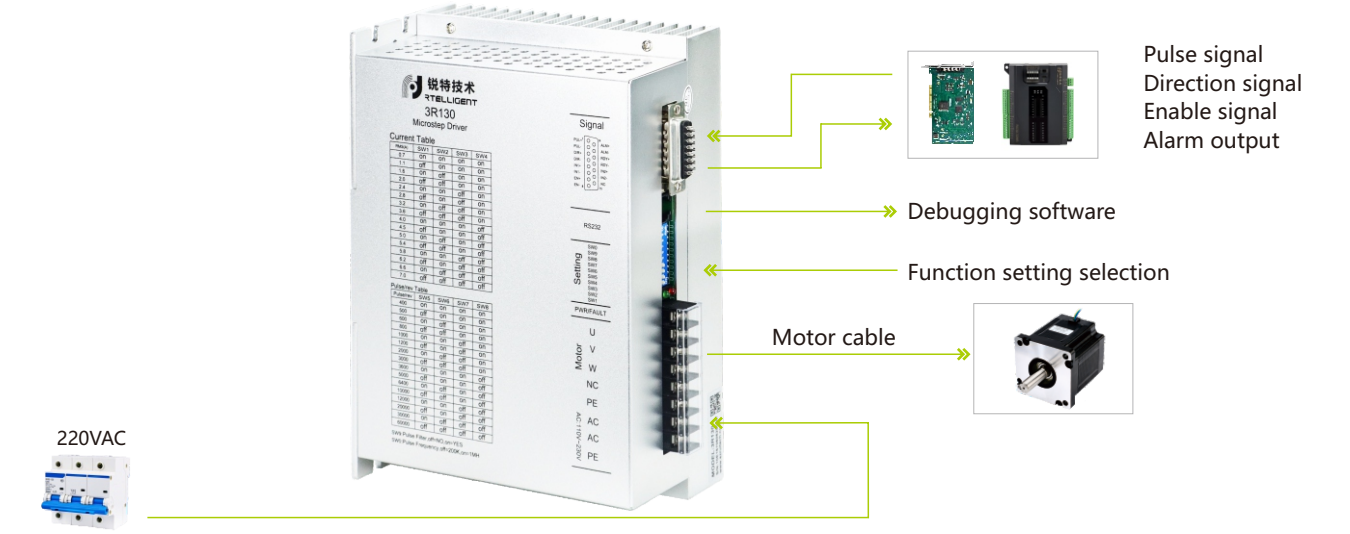

Working Current Setting

RMS(A)	SW1	SW2	SW3	SW4
0.7	on	on	on	on
1.1	off	on	on	on
1.6	on	off	on	on
2.0	off	off	on	on
2.4	on	on	off	on
2.8	off	on	off	on
3.2	on	off	off	on
3.6	off	off	off	on
4.0	on	on	on	off
4.5	off	on	on	off
5.0	on	off	on	off
5.4	off	off	on	off
5.8	on	on	off	off
6.2	off	on	off	off
6.6	on	off	off	off
7.0	off	off	off	off

Installation Dimension

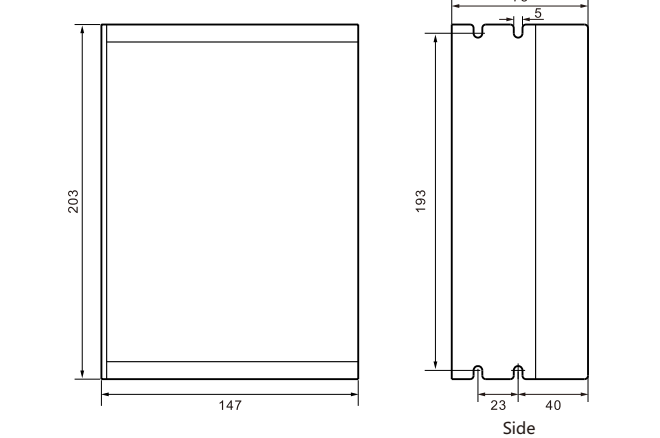

Function Selection

Filter selection			SW9
off	No filtering	Command smooth close	
on	With filtering	Command smooth open	
Max pulse frequency selection			SW0
off	Max frequency 200KHz	on	Max frequency 1MHz

Micro-stepping Setting


Pulse/rev	SW5	SW6	SW7	SW8
400	on	on	on	on
500	off	on	on	on
600	on	off	on	on
800	off	off	on	on
1000	on	on	off	on
1200	off	on	off	on
2000	on	off	off	on
3000	off	off	off	on
3600	on	on	on	off
5000	off	on	on	off
6400	on	off	on	off
10000	off	off	on	off
12000	on	on	off	off
20000	off	on	off	off
30000	on	off	off	off
60000	off	off	off	off

When SW5, SW6, SW7, SW8 are all on, any subdivision can be changed through the debugging software.


Switch Stepper Drive

Comparison between Switch Stepper Motor and AC speed regulating motor

IO Speed-regulating stepper motor	AC Speed regulating motor
The switch speed motor control stepper comes with S-type acceleration and deceleration, stable start and stop, low noise, and precise adjustable speed. The motor self-locks when the IO speed stepper stops.	The AC speed regulating motor has no acceleration or deceleration, the start and stop jitters are large, and the running noise is loud. The speed is adjustable but not accurate. The ordinary speed regulating motor has no self-locking force, and the stopping state is not stable.

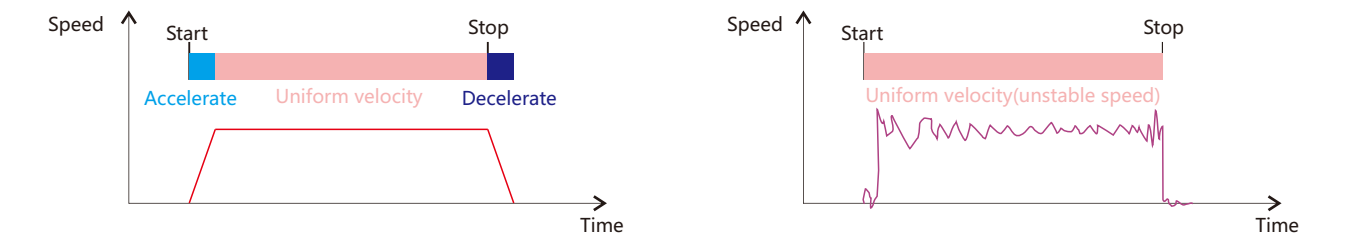

Control Timing Diagram

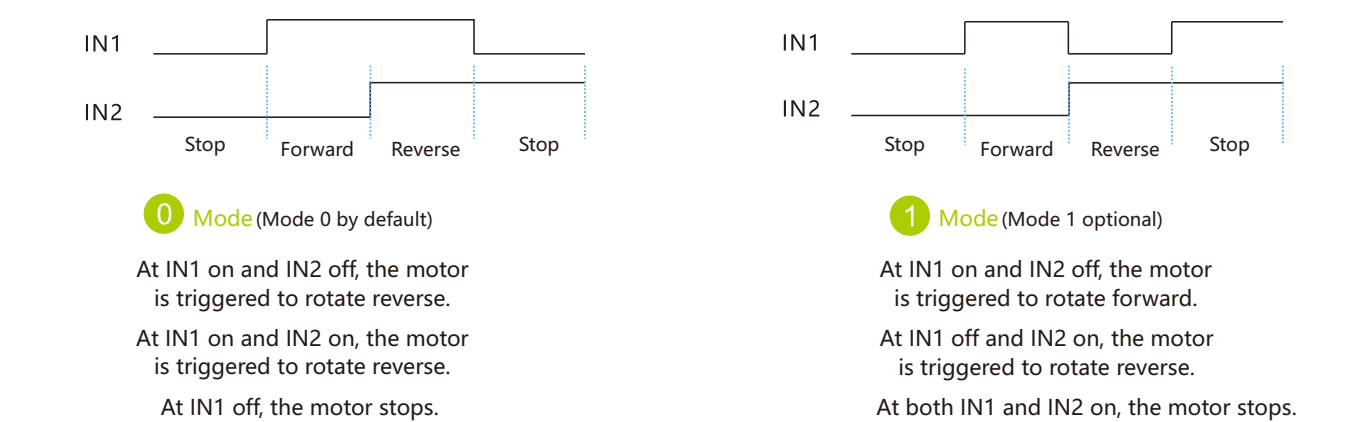

Technical Specifications

		Model	Peak current A	Weight kg	Input voltage	Dimension mm	Matching motor
Single axis control	Switch speed regulating type	R42-IO	2.2	0.1	18-48VDC	92.6×56×21	open loop below 42mm
		R60-IO	5.6	0.3	18-50VDC	118×76×33	open loop below 60mm
		R86-IO	7.2	0.6	18-80VAC	151×97×52	open loop below 86mm
		R110PLUS-IO	8.0	0.9	110-230VAC	178×97×52	open loop below 110mm
	R130-IO	8.0	1.3	110-230VAC	203×147×78	open loop below 130mm	
	Potentiometer speed - regulating type	R42-IR	2.2	0.1	18-48VDC	92.6×56×21	open loop below 42mm
		R60-IR	5.6	0.3	18-50VDC	118×76×33	open loop below 60mm
		R86-IR	7.2	0.6	18-80VAC	151×97×52	open loop below 86mm

LED Indication


LED status	Drive status	Fault handling
Steady green light	Drive not enabled	
Flashing green light	Drive works fine	
1 green 1 red	Drive overcurrent	Check wiring、repair drive
1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
1 green 3 red	Drive internal voltage error	Drive failure

R60-IO

IO series switch stepper drive, with built-in S-type acceleration and deceleration pulse train, only need switch to trigger motor start and stop. Compared with speed regulating motor, IO series of switching stepper drive has the characteristics of stable start and stop, uniform speed, which can simplify the electrical design of engineers.

- Control mode: IN1.IN2
- Speed setting: DIP SW5-SW8
- Signal level: 3.3-24V Compatible
- Typical applications: conveying equipment, inspection conveyoryr, PCB loader


Drive Interface & Connection

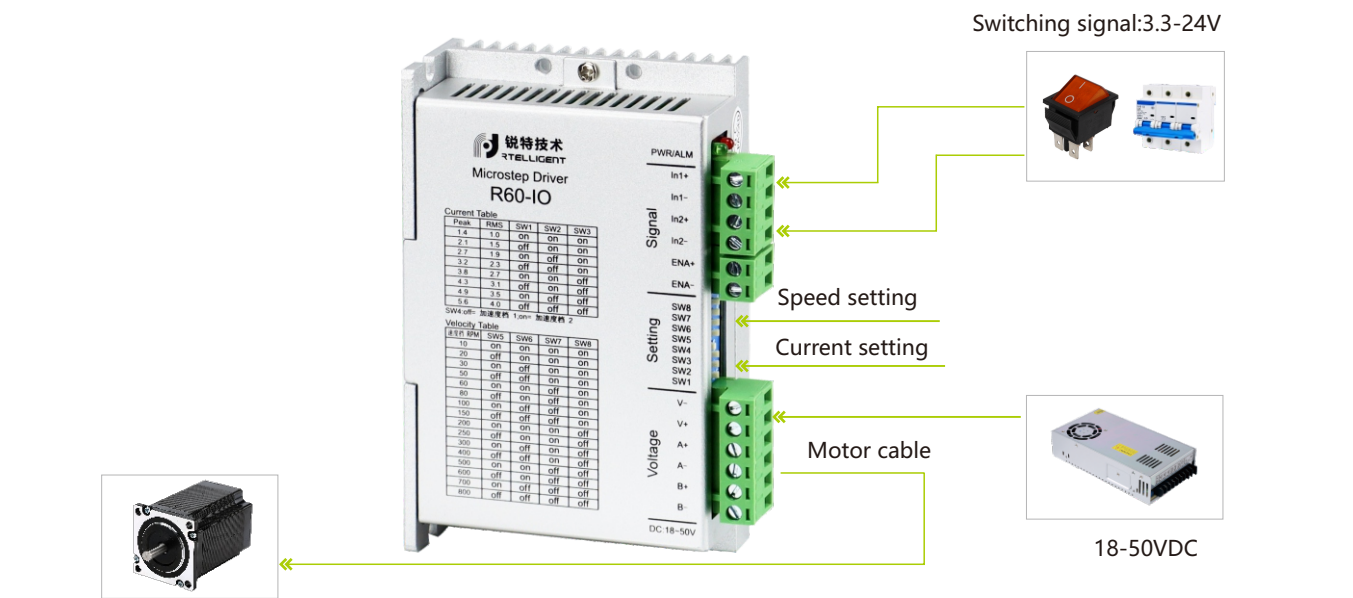

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
1.4A	1.0A	on	on	on
2.1A	1.5A	off	on	on
2.7A	1.9A	on	off	on
3.2A	2.3A	off	off	on
3.8A	2.7A	on	on	off
4.3A	3.1A	off	on	off
4.9A	3.5A	on	off	off
5.6A	4.0A	off	off	off

Installation Dimension

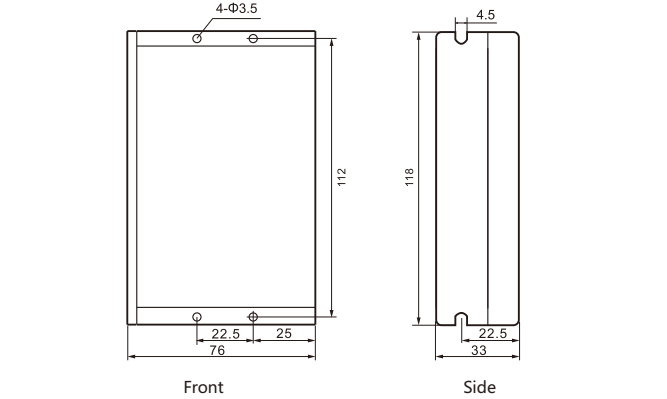

Acceleration Selection

		SW4
Acceleration 1	Low acceleration/deceleration	off
Acceleration 2	High acceleration/deceleration	on


Speed Setting

Speed range(RPM)	SW5	SW6	SW7	SW8
10	on	on	on	on
20	off	on	on	on
30	on	off	on	on
50	off	off	on	on
60	on	on	off	on
80	off	on	off	on
100	on	off	off	on
150	off	off	off	on
200	on	on	on	off
250	off	on	on	off
300	on	off	on	off
400	off	off	on	off
500	on	on	off	off
600	off	on	off	off
700	on	off	off	off
800	off	off	off	off

Multi-axis Stepper Drive

Features

Multi control methods for customer choices	Save labor & shortening debugging time
Multi-axis series drive support pulse or switch control, two axis motor can be independent or synchronous operation, suitable for a variety of applications	The number of drives that need to be debugged is halved, saving labor and time costs for debugging devices
Save space & facilitate customer design	Save cost & improve equipment competitiveness
Compared with traditional drives, the multi-axis series drive can save 40 to 60% of the installation space and facilitate customer layout	While saving space and labor, the multi-axis series can also save drive costs and improve the overall competitiveness of the equipment

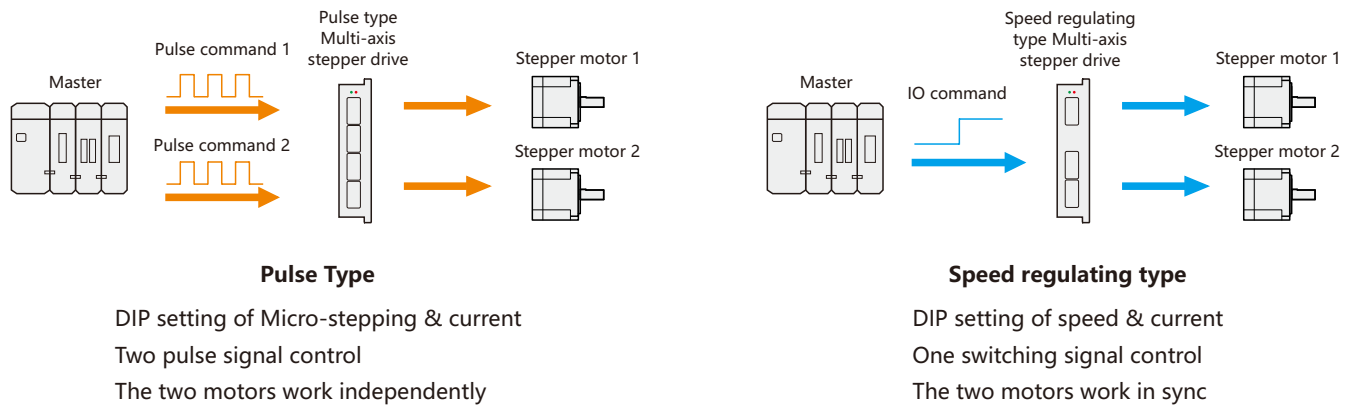

Note: X2 series drive receives 24V pulse signal by default, please refer to Rtelligent for 5V pulse signal.

Technical Specifications

		Model	Peak current A	Weight kg	Input voltage	Dimension mm	Matching motor
Multi-axis control series	Speed regulating	R42-D	2.2	0.2	18-50VDC	118×76×25	open loop below 42mm
		R60-D	5.6	0.3	18-50VDC	118×76×33	open loop below 60mm
	Pulse	R42X2	2.2	0.2	18-50VDC	118×76×25	open loop below 42mm
		R60X2	5.6	0.4	18-48VDC	132×82×29	open loop below 60mm
		R60X3	5.6	0.5	18-48VDC	175×97×31	open loop below 60mm
	Field bus	ECR60X2A	6.0	0.5	18-80VDC	175×98×33	open loop below 60mm
		ECT60X2	6.0	0.5	18-80VDC	175×98×33	closed loop below 60mm


LED Indication

LED status	Drive status	Fault handling
● Steady green light	Drive not enabled	
●● Flashing green light	Drive works fine	
●● 1 green 1 red	Drive overcurrent	Check wiring、repair drive
●●● 1 green 2 red	Drive input power supply overvoltage	Check the input supply voltage
●●● 1 green 3 red	Drive internal voltage error	Drive failure


One-drive-two Stepper Drive R42-D

- In conveying equipment, there are often two - axis synchronization application requirements. R42-D is a customized drive for two-axis synchronization application.
- Speed control mode: the ENA switching signal controls the start-stop, and the potentiometer controls speed.
 - Signal level: IO signals are connected to 24V externally
 - Power supply: 18-50VDC
 - Typical applications: conveying equipment, inspection conveyor, PCB loader

Drive Interface & Connection

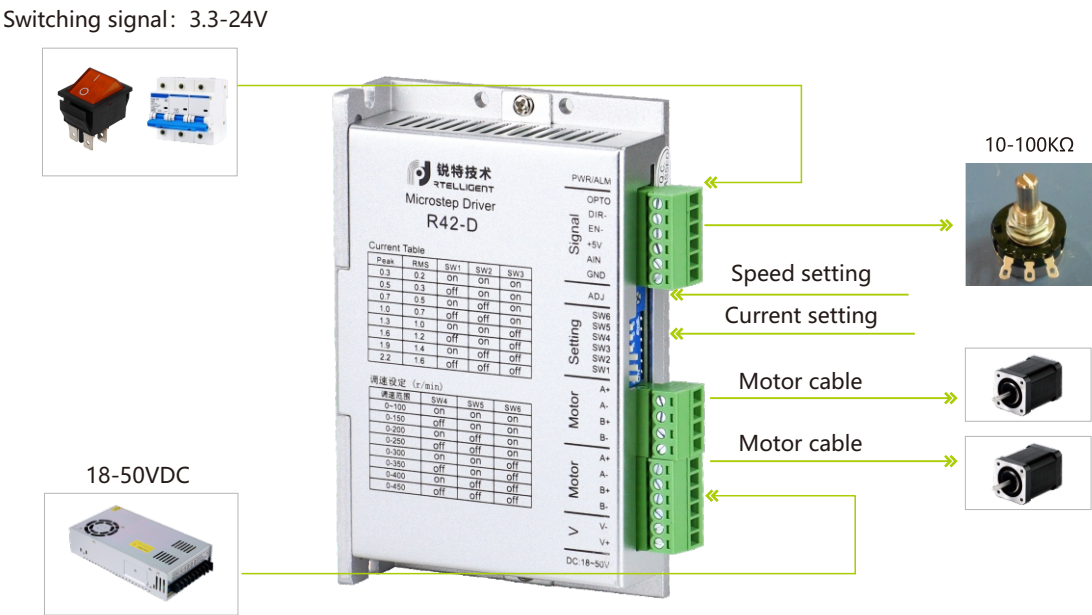

Installation Dimension

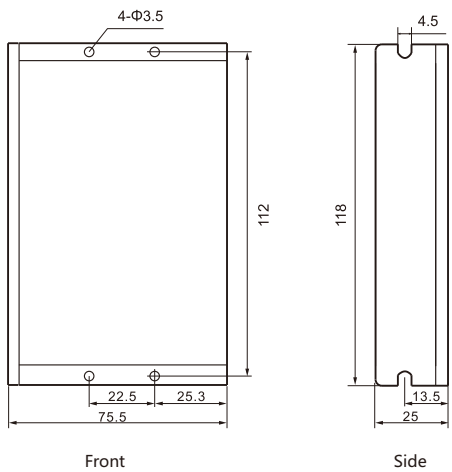

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
0.3A	0.2A	on	on	on
0.5A	0.3A	off	on	on
0.7A	0.5A	on	off	on
1.0A	0.7A	off	off	on
1.3A	1.0A	on	on	off
1.6A	1.2A	off	on	off
1.9A	1.4A	on	off	off
2.2A	1.6A	off	off	off

Speed Setting

Speed range	SW4	SW5	SW6
0~100	on	on	on
0~150	off	on	on
0~200	on	off	on
0~250	off	off	on
0~300	on	on	off
0~350	off	on	off
0~400	on	off	off
0~450	off	off	off


One-drive-two Stepper Drive R60-D

Two-axis synchronization appication is often required on the conveying equipment. R60-D is the two-axis synchronization specific drive customized by Rtelligent.

Using the TI delicated dual-core DSP chip, R60-D drives the two-axis motor independently to avoid the interference within the back electromotive force and achieve independent operation and synchronized movement.

- Speed control mode: the ENA switching signal controls the start-stop, and the potentiometer controls speed.
- Signal level: IO signals are connected to 24V externally
- Power supply: 18-50VDC
- Typical applications: conveying equipment, inspection conveyor, PCB loader


Drive Interface & Connection

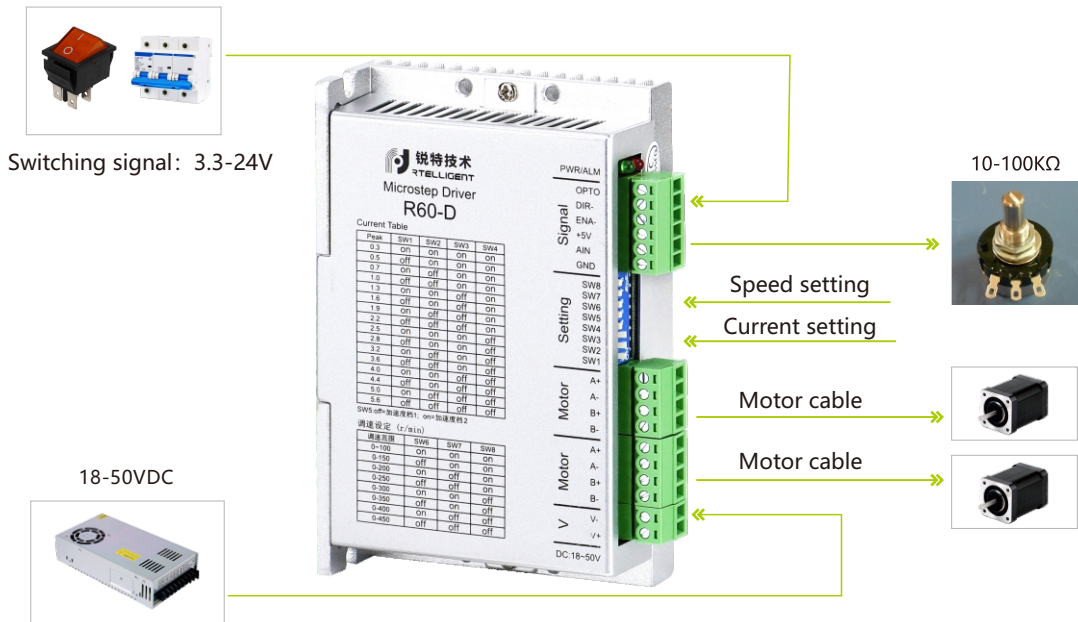

Speed Setting

Speed range	SW6	SW7	SW8
0~100	on	on	on
0~150	off	on	on
0~200	on	off	on
0~250	off	off	on
0~300	on	on	off
0~350	off	on	off
0~400	on	off	off
0~450	off	off	off

Installation Dimension

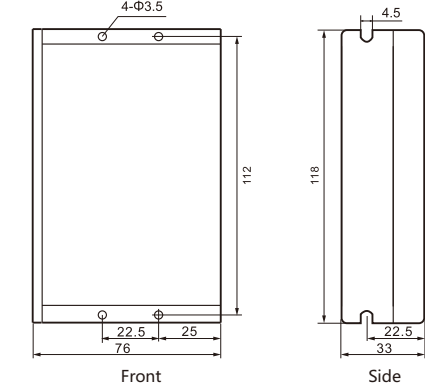

Acceleration Selection

		SW5
Acceleration 1	Low acceleration/deceleration	off
Acceleration 2	High acceleration/deceleration	on

Working Current Setting

Peak	SW1	SW2	SW3	SW4
0.3	on	on	on	on
0.5	off	on	on	on
0.7	on	off	on	on
1.0	off	off	on	on
1.3	on	on	off	on
1.6	off	on	off	on
1.9	on	off	off	on
2.2	off	off	off	on
2.5	on	on	on	off
2.8	off	on	on	off
3.2	on	off	on	off
3.6	off	off	on	off
4.0	on	on	off	off
4.4	off	on	off	off
5.0	on	off	off	off
5.6	off	off	off	off


Two-in-one Drive R42X2

Multi-axis automation equipment is often required to reduce space and save the cost.R42X2 is the first two-axis special drive developed by Rtelligent in domesitic market.


R42X2 can independently drive two 2-phase stepper motors up to 42mm frame size. The two-axis micro-stepping and current must be set to the same.

- Speed control mode: the ENA switching signal controls the start-stop, and the potentiometer controls speed.
- Signal level: IO signals are connected to 24V externally
- Power supply: 18-50VDC
- Typical applications: conveying equipment, inspection conveyor, PCB loader

Drive Interface & Connection

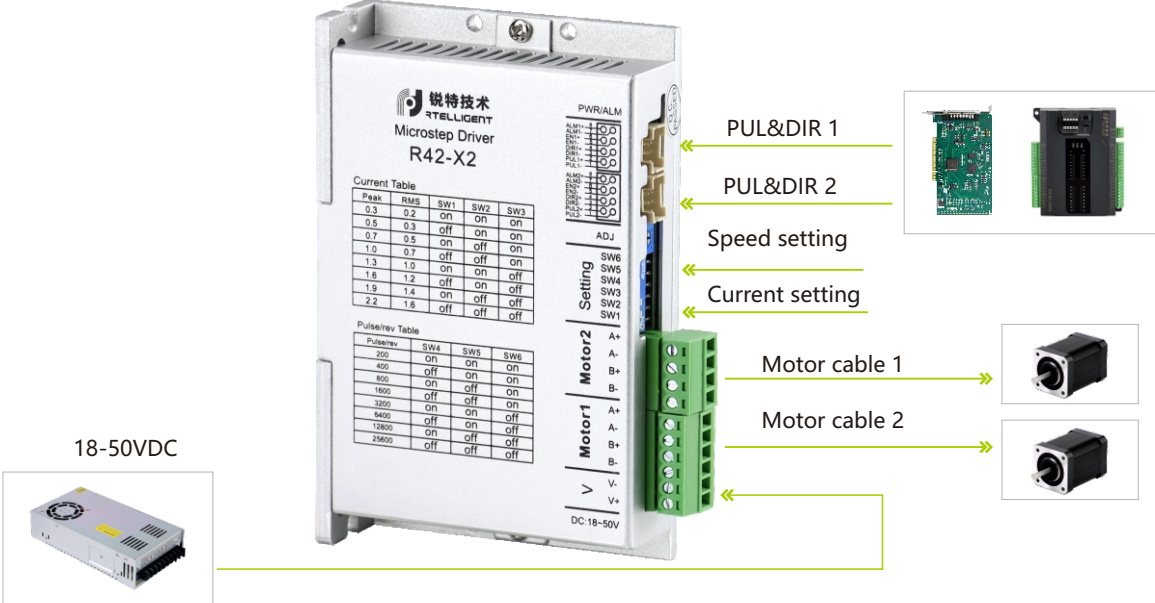

Installation Dimension

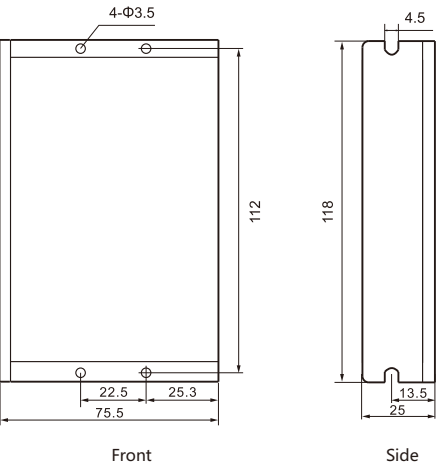

Working Current Setting

Output current peak	Output current RMS	SW1	SW2	SW3
0.3A	0.2A	on	on	on
0.5A	0.3A	off	on	on
0.7A	0.5A	on	off	on
1.0A	0.7A	off	off	on
1.3A	1.0A	on	on	off
1.6A	1.2A	off	on	off
1.9A	1.4A	on	off	off
2.2A	1.6A	off	off	off

Micro-stepping Setting

Pulse/rev	SW4	SW5	SW6
200	on	on	on
400	off	on	on
800	on	off	on
1600	off	off	on
3200	on	on	off
6400	off	on	off
12800	on	off	off
25600	off	off	off


Two-in-one Drive R60X2

Multi-axis automation equipment is often required to reduce space and save the cost. R60X2 is the first two-axis special drive developed by Rtelligent in domestic market.


R60X2 can independently drive two 2-phase stepper motors up to 60mm frame size. The two-axis micro-stepping and current can be set separately.

- Pulse mode: PUL&DIR
- Signal level: 24V default, R60X2-5V is required for 5V
- Typical applications: dispenser, soldering machine, multi-axis test equipment.

Drive Interface & Connection

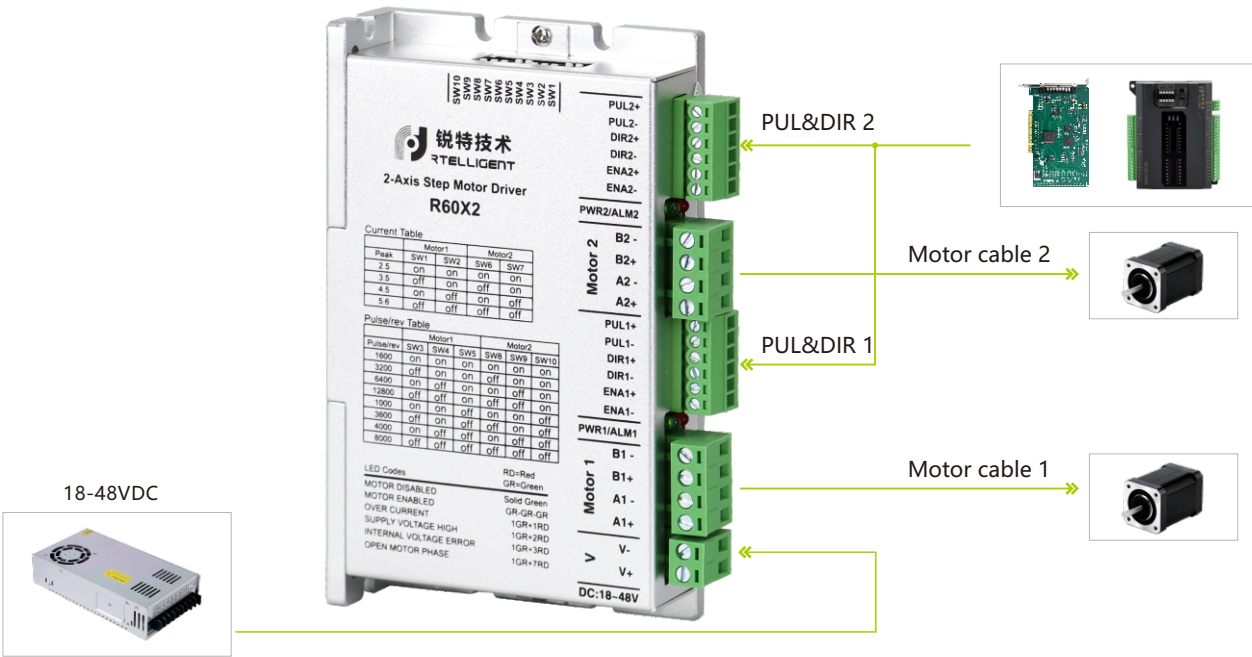

Installation Dimension

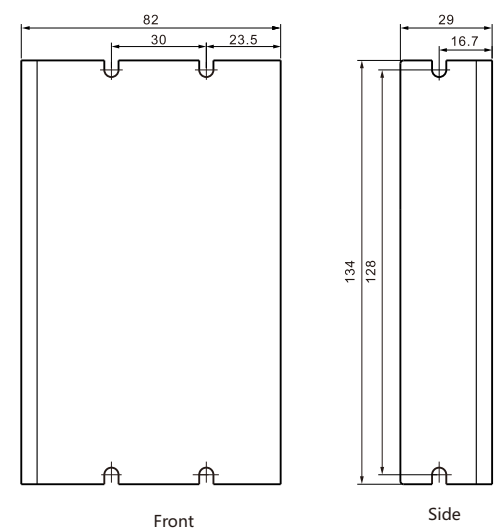

Working Current Setting

Output current peak	Motor 1		Motor 2	
	SW1	SW2	SW6	SW7
2.5A	on	on	on	on
3.5A	off	on	off	on
4.5A	on	off	on	off
5.6A	off	off	off	off

Micro-stepping Setting

Pulse/rev	Motor 1(Motor 2)		
	SW3(8)	SW4(9)	SW5(10)
1600	on	on	on
3200	off	on	on
6400	on	off	on
12800	off	off	on
1000	on	on	off
3600	off	on	off
4000	on	off	off
8000	off	off	off


Three-in-one Drive R60X3

Three-axis platform equipment often has the need to reduce space and save cost. R60X3/3R60X3 is the first three-axis special drive developed by Rtelligent in domestic market.


R60X3/3R60X3 can independently drive three 2-phase/3-phase stepper motors up to 60mm frame size. The three-axis micro-stepping and current are independently adjustable.

- Pulse mode: PUL&DIR
- Signal level: 3.3-24V compatible; serial resistance not required for the application of PLC.
- Typical applications: dispenser, soldering machine, engraving machine, multi-axis test equipment.

Drive Interface & Connection

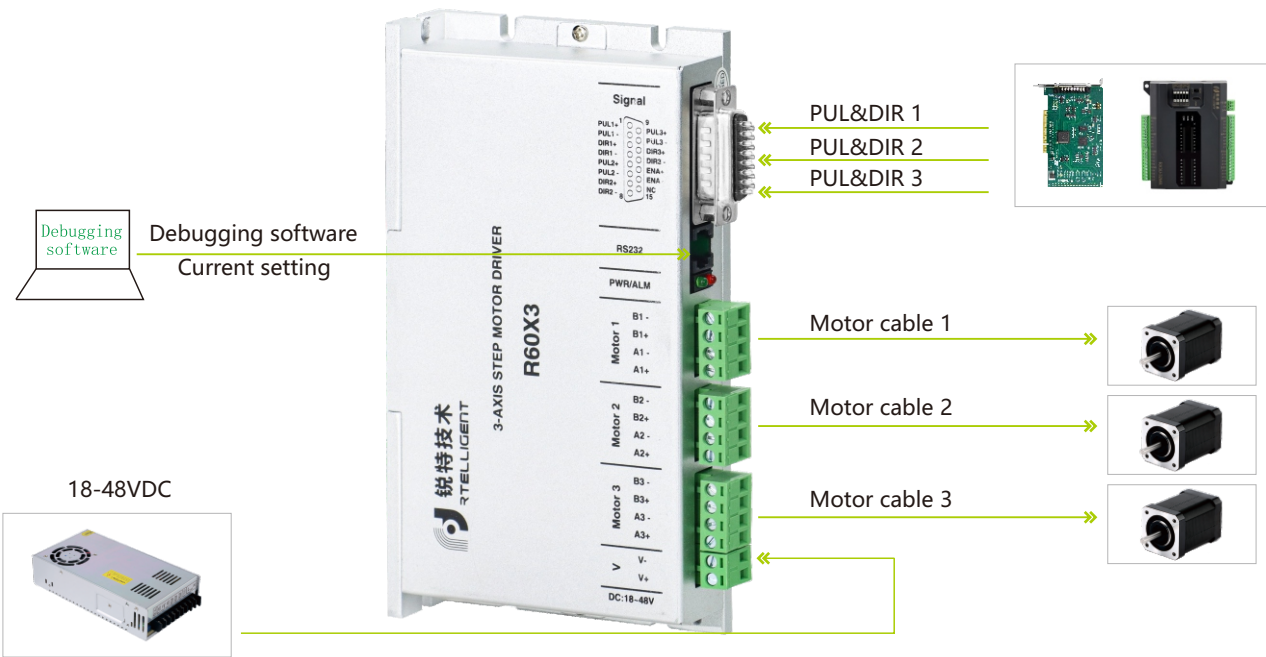

Installation Dimension

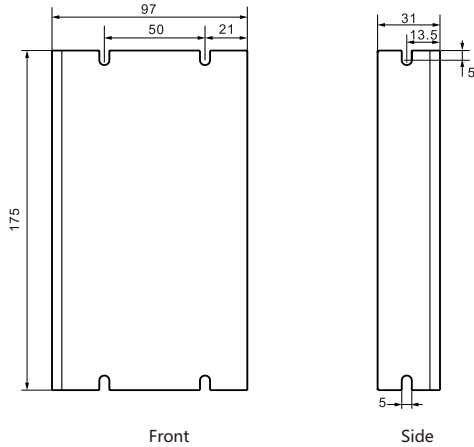

Parameter Debugging Interface



Open Loop Stepper Motor

The stepper motor is a special motor specially designed for accurate control of position and speed. The biggest characteristic of stepper motor is “digital” . For each pulse signal from the controller, the stepper motor driven by its drive runs at a fixed angle ("one step" for short), as shown in the following figure.

Rtelligent A/AM series stepper motor is designed based on the Cz optimized magnetic circuit and adopts stator and rotator materials of high magnetic density, featuring a high energy efficiency.



Naming Rule

57

1

A

2

M

3

23

4

- □

5

1

Base size

2

Step angle type code

A: 1.8 degrees

B: 1.2 degrees

C: 0.72 degrees

3

Motor series code

M: M series

4

Motor torque

0.6: 0.6Nm

30: 3.0Nm

120: 12.0Nm

5

Non-standard code


D: Double shaft

Z2: With brake

*Model naming rules are only used for model meaning analysis. For specific optional models, please refer to the details page.

Application Guide

- 1 Stepper motor is generally used at the highest speed of 600-700rpm.
- 2 The low speed resonance zone of stepper motor is around 100rpm and 200rpm
(The first resonance zone is about 100rpm, The second resonance zone is about 200rpm).
- 3 The 8-wire motor can be connected in series and parallel. Please connect the cables according to the motor label.
(Series connection is suitable for low speed and high torque applications, while parallel is suitable for high speed applications)
- 4 If motor running jitter, stop shaking, there should be the inertia matching problem, clients need to consider the acceleration and deceleration.
- 5 If stepper motor can not start, please check wiring, micro-stepping setting, system acceleration and deceleration settings.
- 6 Vertical applications require stepper motors with brakes.

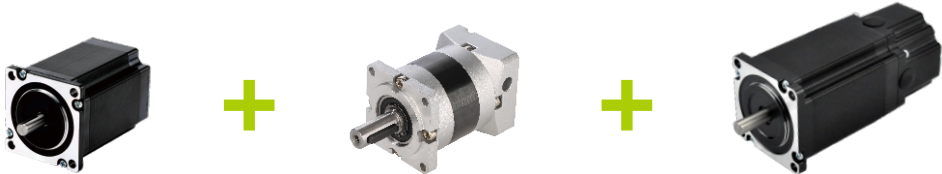


2-Phase Stepper Motor 20/28mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
20AM003	1.8	0.03	0.6	5.7	2.6	3	4	10	33	0.07
20AM005	1.8	0.05	0.6	7.0	3.4	38	4	10	45	0.10
28AM006	1.8	0.06	1.2	1.4	1.0	90	5	20	32	0.11
28AM01	1.8	0.10	1.2	1.8	1.6	130	5	20	41	0.13
28AM013	1.8	0.13	1.2	2.2	2.3	180	5	20	51	0.18

*NEMA 8 (20mm), NEMA 11 (28mm)


20AM Series Dimension (mm)

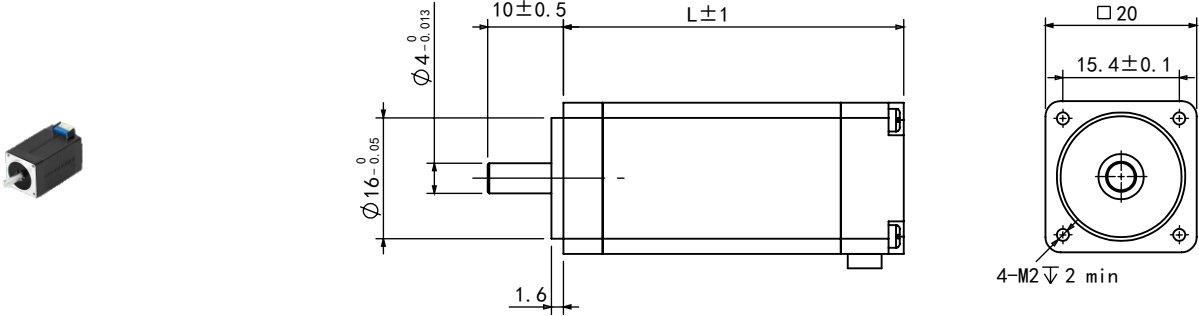

28AM Series Dimension (mm)

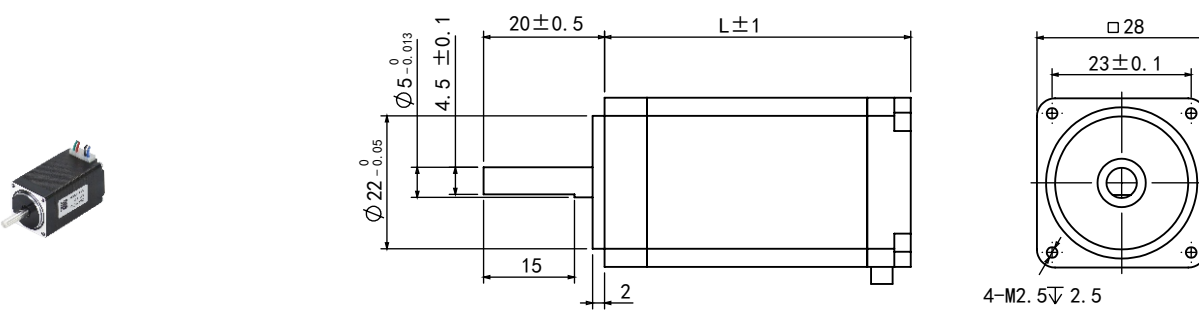


Torque-frequency Curve

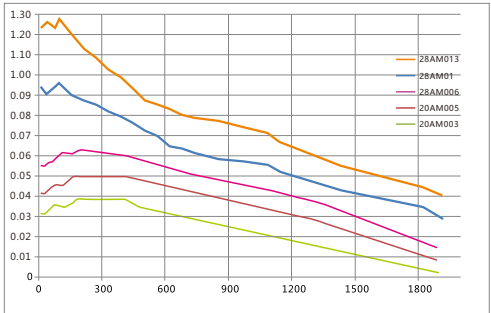

Drive: R42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600

Wiring




■ 2-Phase Stepper Motor 35/39mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
35A02	1.8	0.2	1.0	3.8	5.3	22	5	20	34	0.18
39A02	1.8	0.2	1.0	4.1	7.1	30	5	20	36	0.28

*NEMA 14 (35mm), NEMA 16 (39mm)

■ 35A Series Dimension (mm)

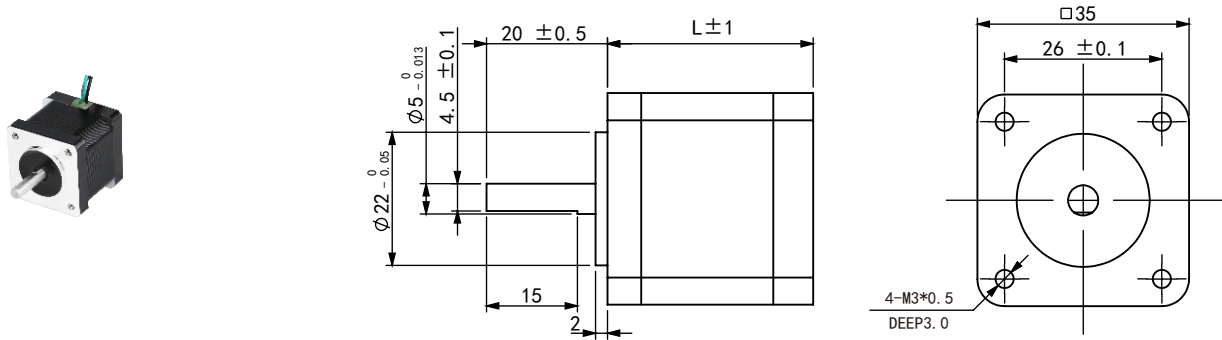


■ 39A Series Dimension (mm)

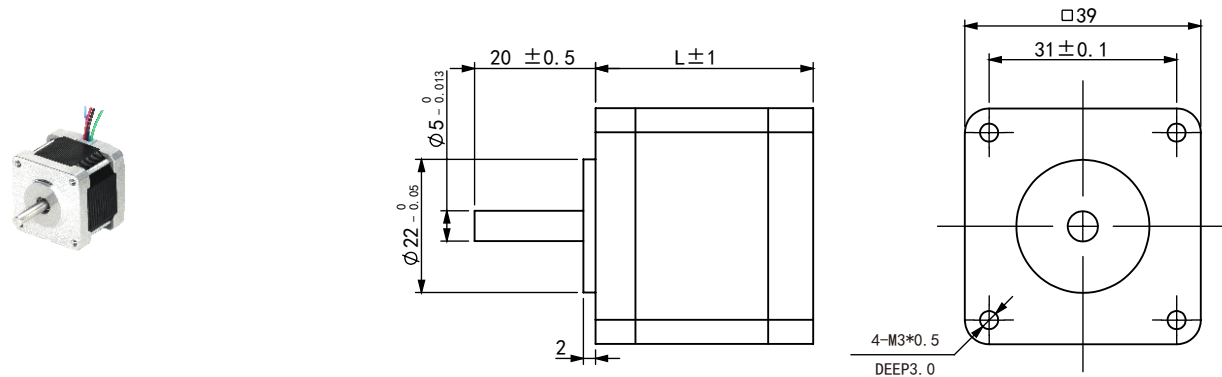


■ Torque-frequency Curve

■ Wiring

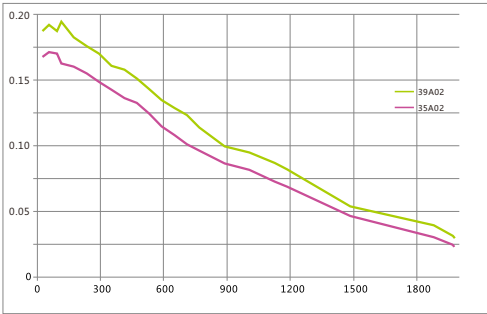

Drive: R42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600




■ 2-Phase Stepper Motor 42mm Series Technical Specifications

Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
42AM02	1.8	0.2	1.5	1.3	1.9	41	5	24	34	0.23
42AM04	1.8	0.4	1.5	2.6	5.1	57	5	24	40	0.29
42AM06	1.8	0.6	2.0	1.8	3.8	82	5	24	47	0.37
42AM08	1.8	0.8	2.0	1.9	5.0	114	5	24	60	0.48


*NEMA 17 (42mm)

■ 42AM Series Dimension (mm)

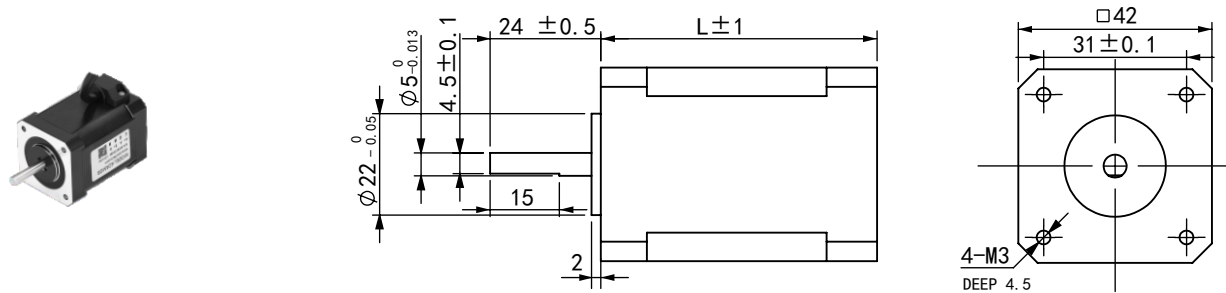


■ Torque-frequency Curve

■ Wiring

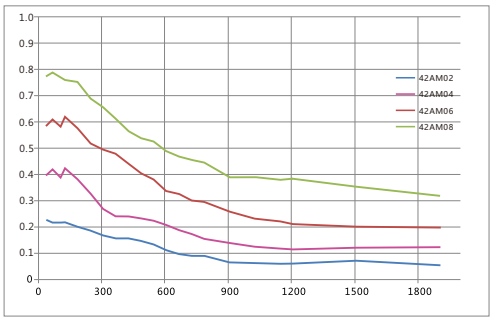

Drive: R42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600




■ 2-Phase Stepper Motor 42mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
42A01	1.8	0.15	1.0	1.3	1.9	41	5	24	34	0.23
42A02	1.8	0.2	1.2	2.6	5.1	57	5	24	40	0.29
42A03	1.8	0.3	2.0	1.8	3.8	82	5	24	47	0.37
42A08	1.8	0.8	2.0	1.9	5.0	114	5	24	60	0.48

*NEMA 17 (42mm)

■ 42A Series Dimension (mm)

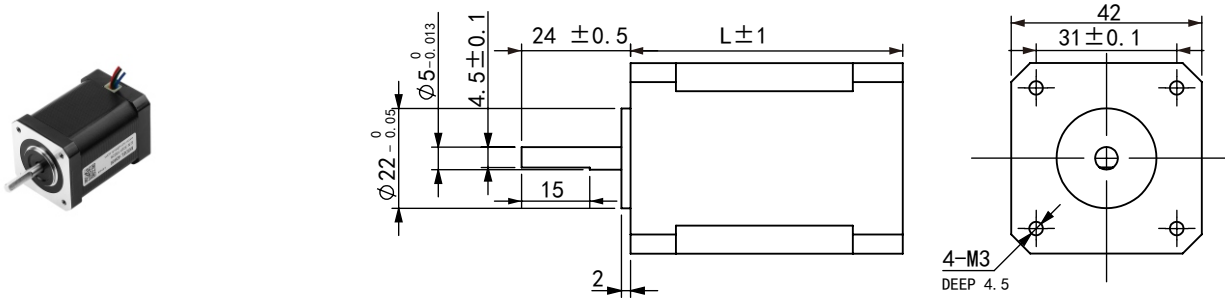


■ Torque-frequency Curve

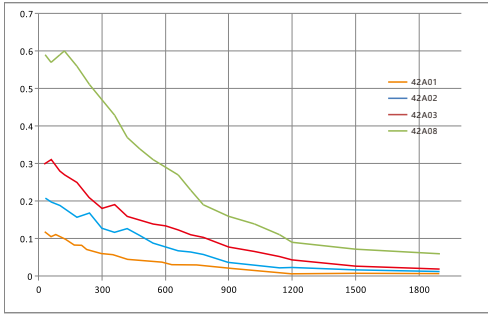

Drive: R42
Voltage: 24VDC
Current: Rated
Micro-stepping: 1600

■ Wiring




■ 2-Phase Stepper Motor 57mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
57AM13	1.8	1.3	3.0	0.42	1.5	260	8	21	55	0.67
57AM23	1.8	2.3	5.0	0.64	2.7	460	8	21	76	1.03
57AM24	1.8	2.4	5.6	0.41	2.0	460	8	21	80	1.11
57AM26	1.8	2.6	5.0	0.47	2.1	520	8	21	84	1.20
57AM30	1.8	3.0	5.0	0.82	3.7	720	8	21	102	1.48
D57AM30	1.8	3.0	5.0	0.50	2.2	690	8	21	86	1.39

*NEMA 23 (57mm)


■ 57AM Series Dimension (mm)

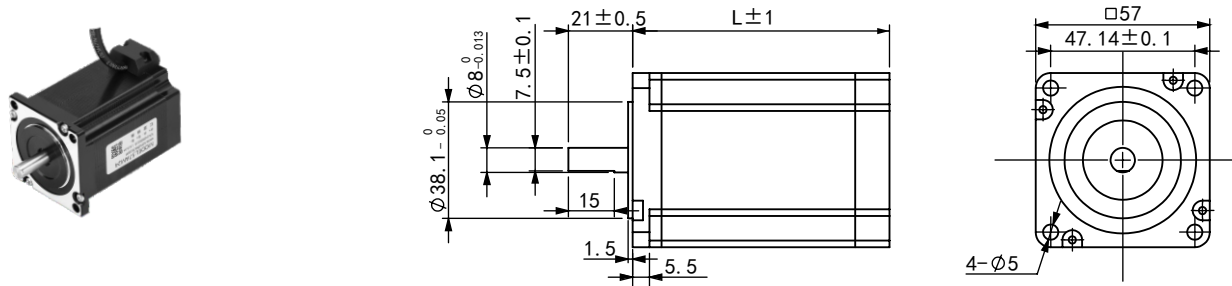

■ D57AM Series Dimension (mm)

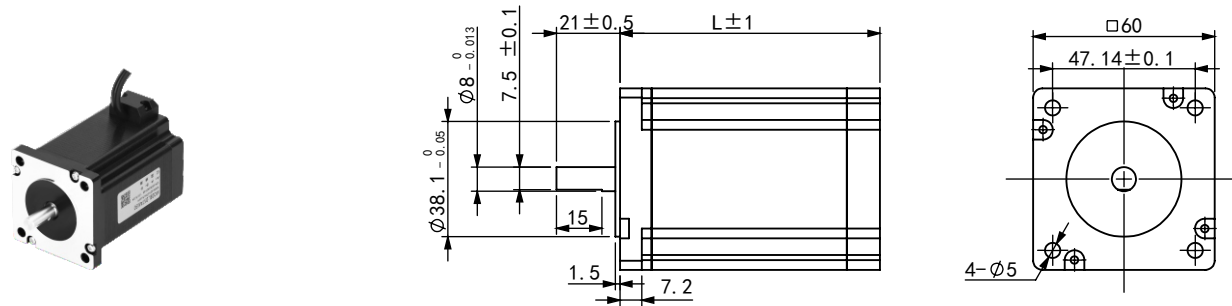


■ Torque-frequency Curve

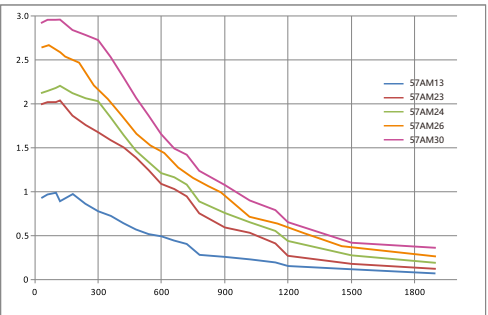

Drive: R60
Voltage: 36VDC
Current: Rated
Micro-stepping: 1600

■ Wiring




■ 2-Phase Stepper Motor 57mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
57A09	1.8	0.9	2.8	0.42	1.53	260	6.35	21	55	0.67
57A1	1.8	1.3	2.8	0.64	2.65	460	6.35	21	76	1.03
57A2	1.8	2.2	4.0	0.41	2.00	460	8.00	21	80	1.11
57A3	1.8	3.0	5.0	0.82	3.73	720	8.00	21	102	1.48

*NEMA 23 (57mm)


■ 57A09/57A1 Dimension (mm)

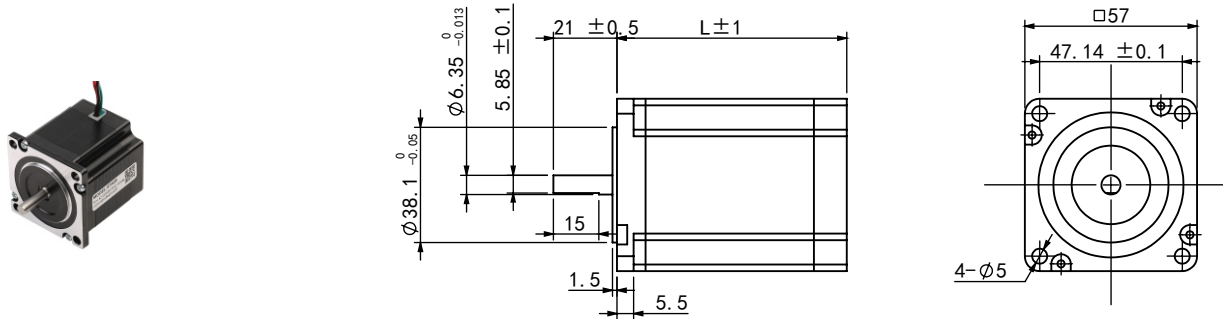

■ 57A2/57A3 Dimension (mm)

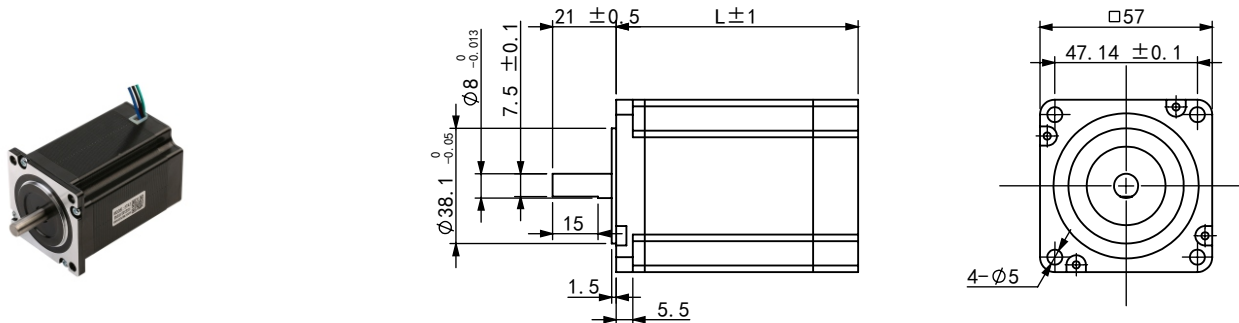


■ Torque-frequency Curve

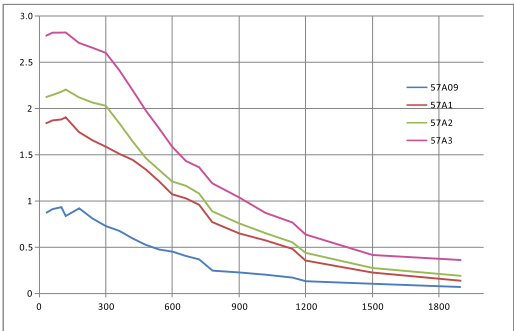

Drive: R60
Voltage: 36VDC
Current: Rated
Micro-stepping: 1600

■ Wiring




■ 2-Phase Stepper Motor 60mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
60AM21	1.8	2.1	5.0	0.35	1.3	330	8	21	58	0.87
60AM30	1.8	3.0	5.0	0.50	2.2	690	8	21	86	1.39
60AM40	1.8	4.0	5.0	0.86	3.5	880	10	30	102	2.05

*NEMA 24 (60mm)


■ 60AM21/60AM30 Dimension (mm)

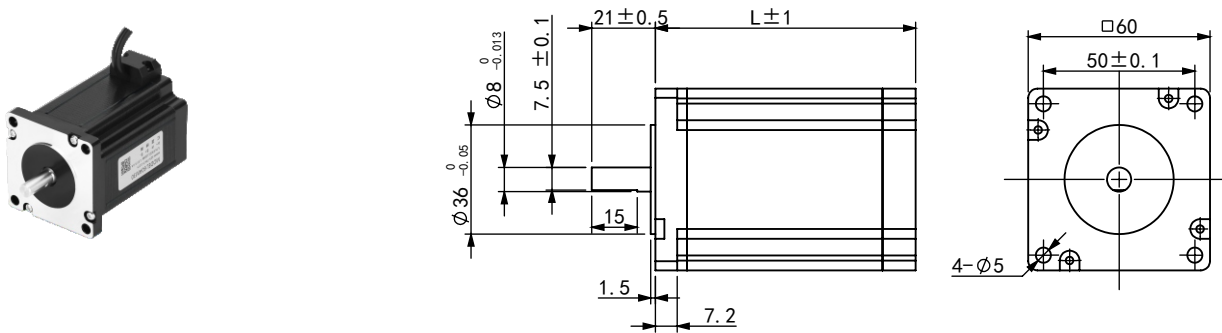

■ 60AM40 Dimension (mm)

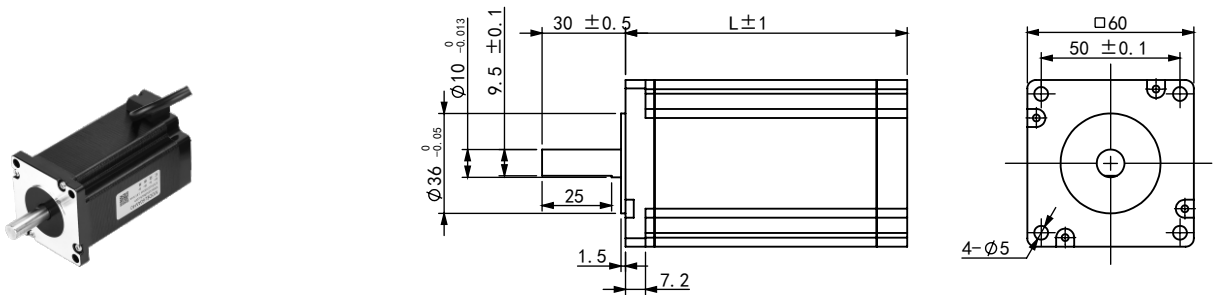


■ Torque-frequency Curve

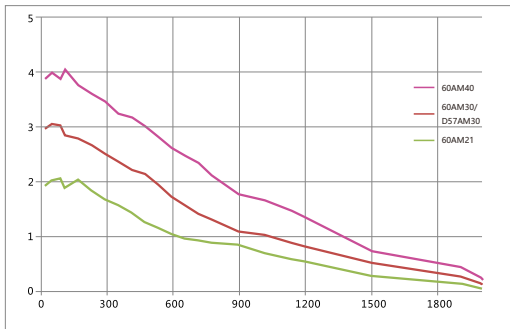

Drive: R60
Voltage: 48VDC
Current: Rated
Micro-stepping: 1600

■ Wiring




■ 2-Phase Stepper Motor 86mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
86AM35	1.8	3.5	4.0	0.81	3.87	800	9.5	32	64	1.70
86AM45	1.8	4.5	6.0	0.41	2.82	1400	12.7	32	78	2.25
86AM65	1.8	6.5	6.0	0.47	4.18	2300	12.7	32	98	2.95
86AM85	1.8	8.5	6.0	0.53	5.54	2800	12.7	32	112	3.67
86AM120	1.8	12	6.0	1.72	8.30	4000	15.875	32	155	5.10
86AM45-14	1.8	4.5	6.0	0.41	2.82	1400	14	32	78	2.25
86AM65-14	1.8	6.5	6.0	0.47	4.18	2300	14	32	98	2.95
86AM85-14	1.8	8.5	6.0	0.53	5.54	2800	14	32	112	3.67
86AM100	1.8	10	6.0	0.75	5.30	3400	14	32	128	4.10
86AM120-14	1.8	12	6.0	1.72	8.30	4000	14	32	155	5.10

*NEMA 34 (86mm)


■ 86AM35 Dimension (mm)

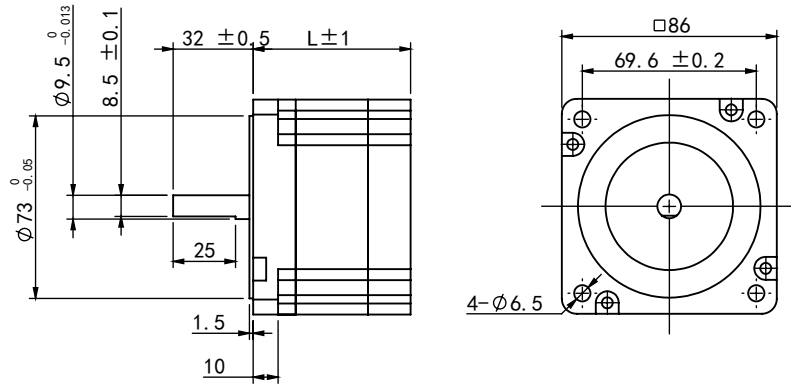


■ 86AM45Dimension (mm)

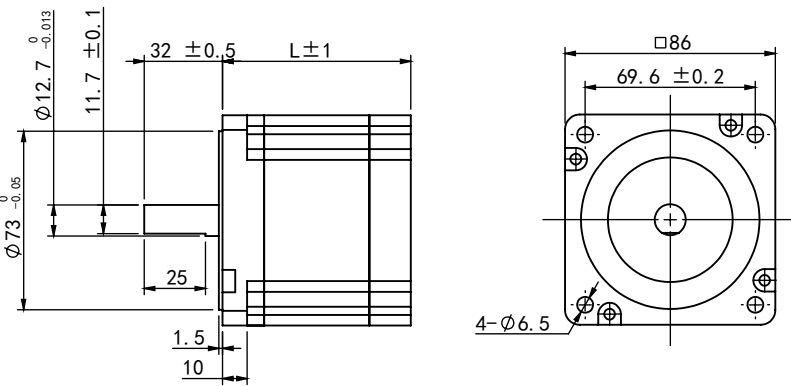


■ 86AM65/86AM85 Dimension

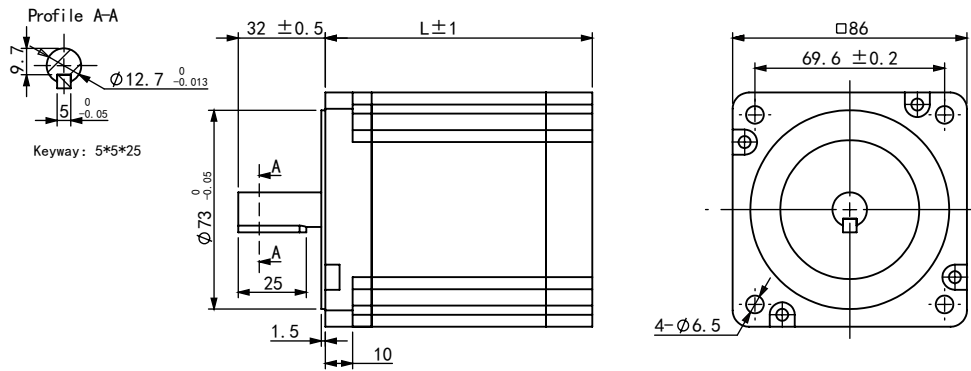


■ 86AM120 Dimension (mm)

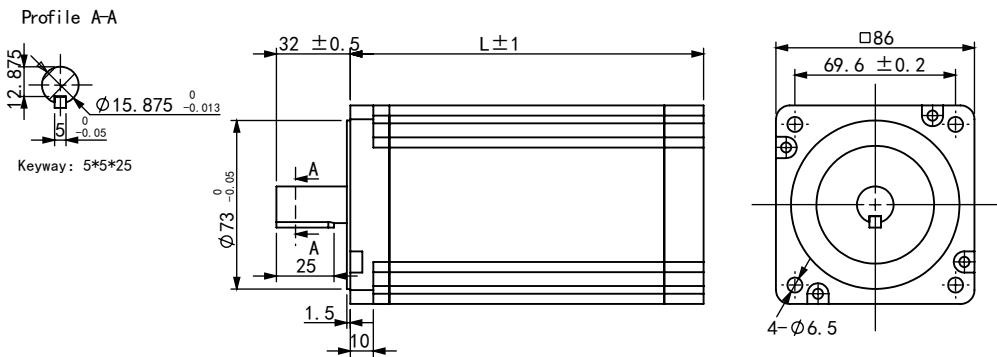

■ 86AM-14 Dimension (mm)

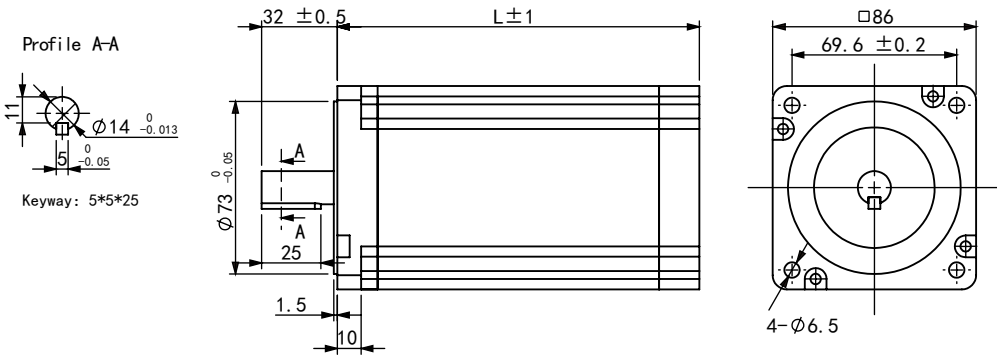


■ Torque-frequency Curve

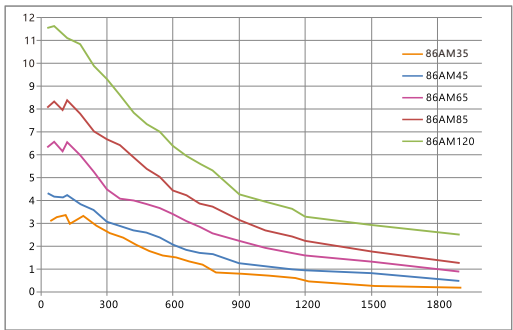

Drive: R86
Voltage: 60VDC

Current: Rated
Micro-stepping: 1600

■ Wiring




2-Phase Stepper Motor 110/130mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
110A12	1.8	12	6.0	0.37	4.9	7200	19	56	115	6.0
110A20	1.8	20	6.0	0.80	15.0	11000	19	56	150	8.4
110A28	1.8	28	6.5	1.20	22.0	16200	19	56	201	11.7
130A27	1.8	27	6.0	0.65	13.8	35000	19	45	226	13.0
130A45	1.8	45	7.0	0.90	9.5	48400	19	45	283	19.0

*NEMA 42 (110mm), NEMA 52 (130mm)

110A series Dimension (mm)

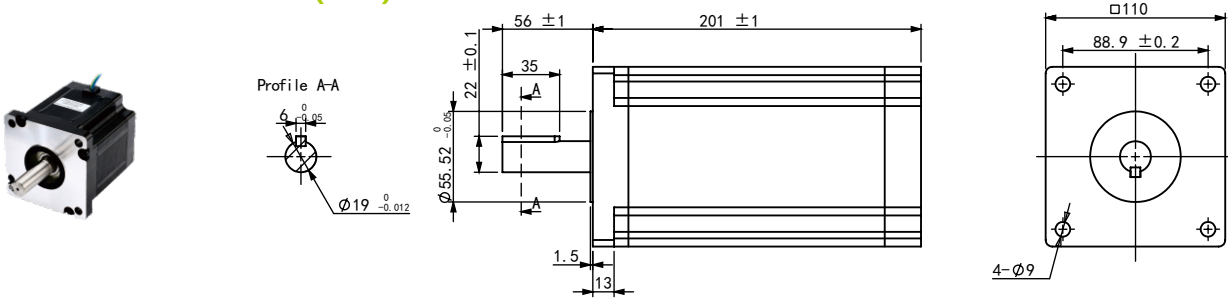


Torque-frequency Curve

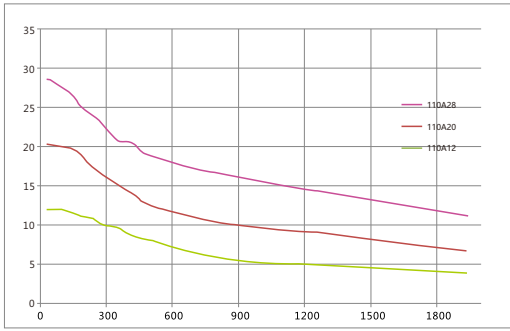


Drive: R110PLUS
Voltage: 220VDC
Current: Rated
Micro-stepping: 1600


Wiring



130A Series Dimension (mm)

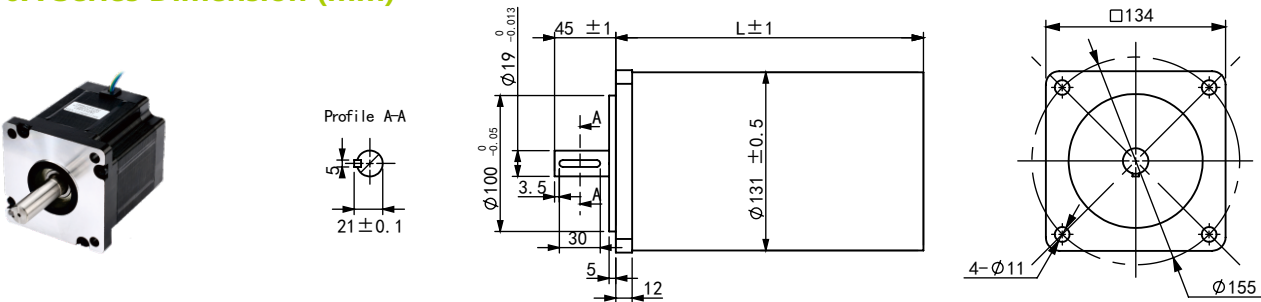


Torque-frequency Curve

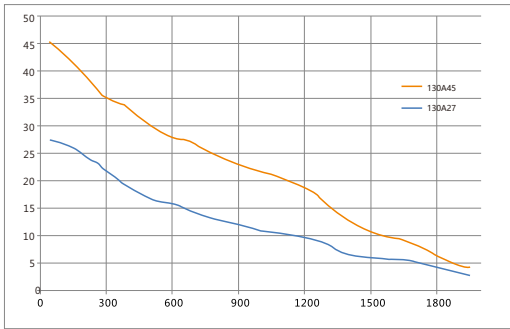

Drive: R130
Voltage: 220VAC
Current: Rated
Micro-stepping: 2000

Wiring




3-Phase Stepper Motor 57mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
57BM09	1.2	0.9	3.5	0.50	1.2	260	8	30	55	0.67
57BM15	1.2	1.5	3.5	0.69	1.8	480	8	30	78	1.10

*NEMA 23 (57mm)


57BM09 Dimension (mm)

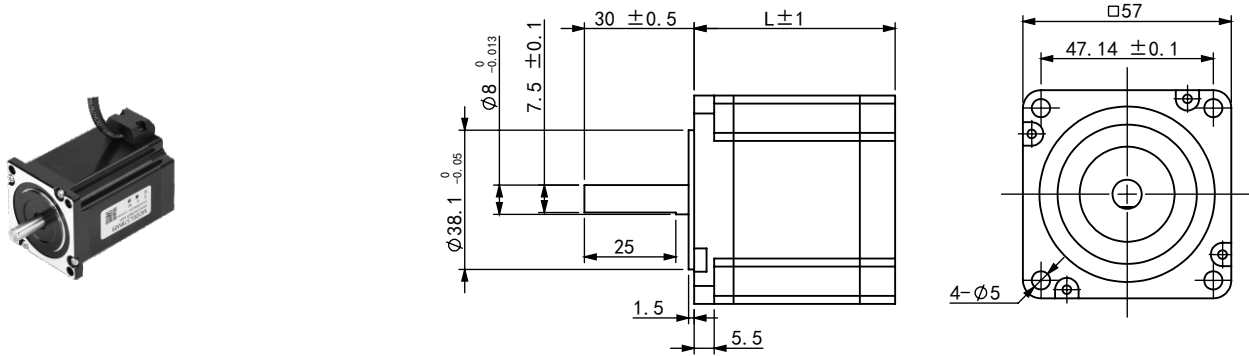

57BM15 Dimension (mm)

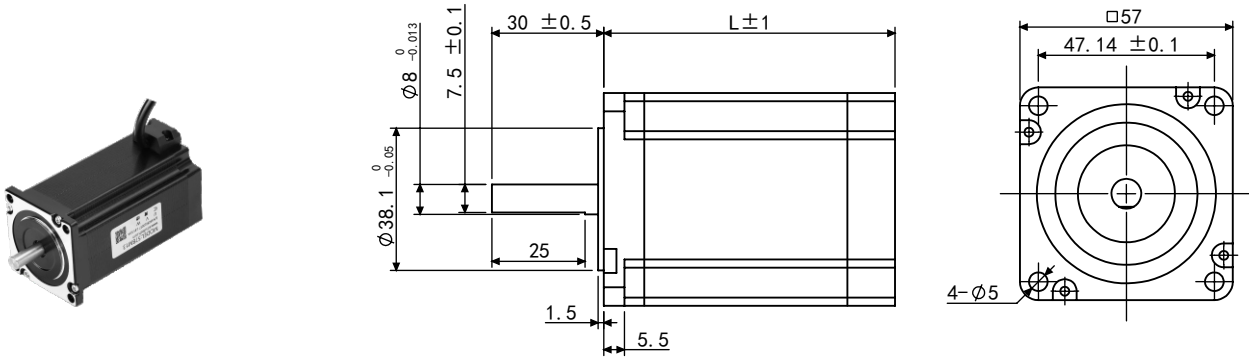


Torque-frequency Curve

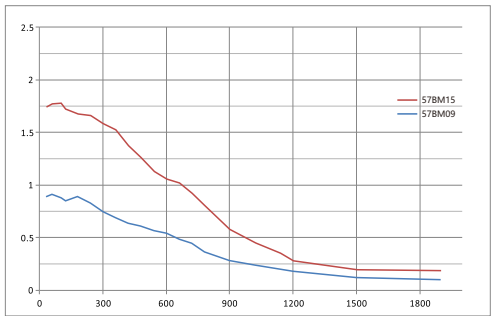

Drive: 3R60
Voltage: 36VDC
Current: Rated
Micro-stepping: 1600

Wiring

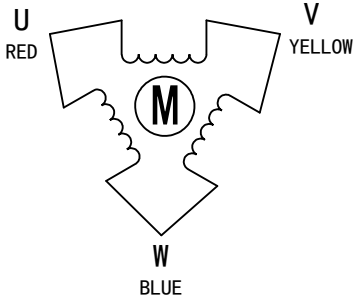


3-Phase Stepper Motor 86mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
86BM20	1.2	2.3	3.0	2.1	7.7	1300	12	32	73	2.0
86BM40	1.2	4.3	4.5	1.1	4.5	2500	12	32	105	2.0
86BM70	1.2	7.0	3.0	4.4	20	3400	14	32	129	4.1
86BM90	1.2	9.0	3.0	5.7	29	4000	14	32	155	5.1

*NEMA 34 (86mm)


86BM20/86BM40尺寸(mm)

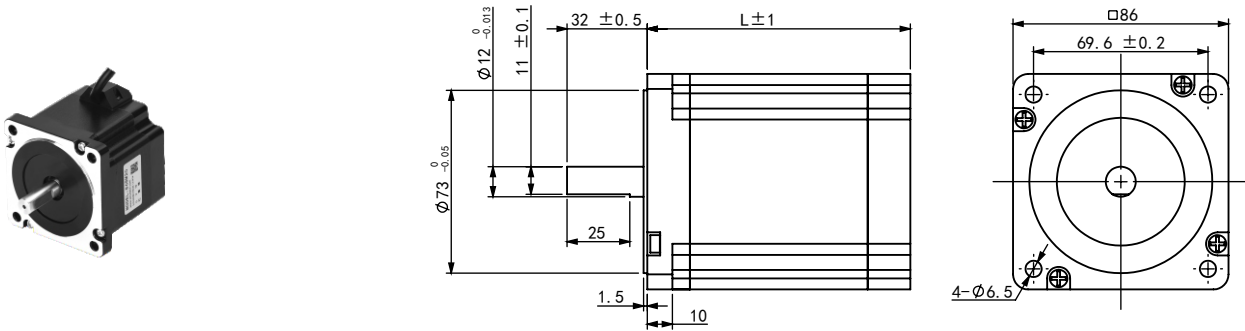

86BM70/86BM90尺寸(mm)

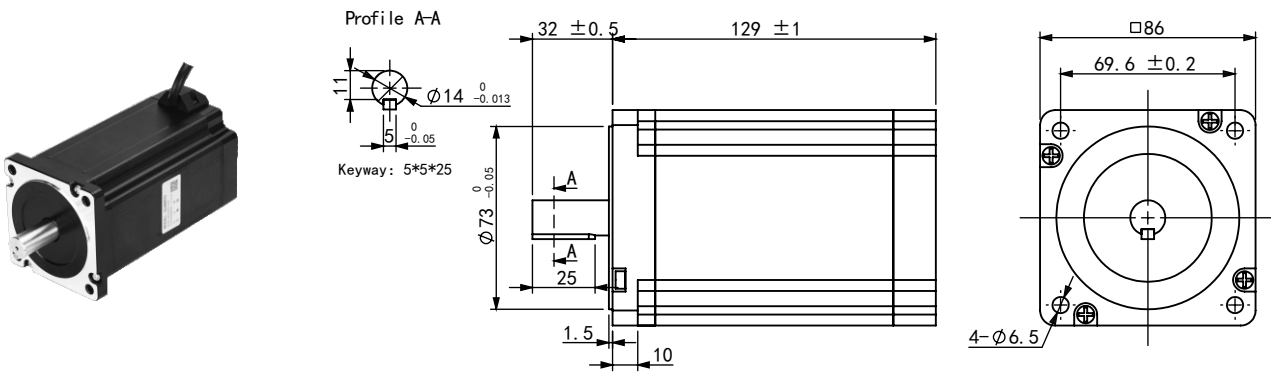


Torque-frequency Curve

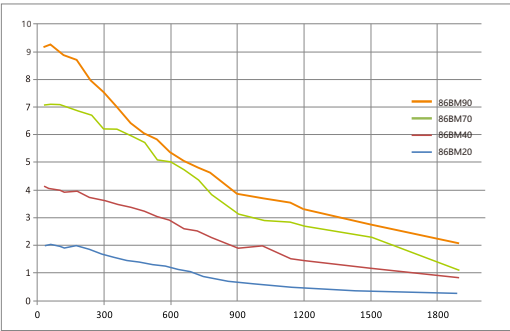

Drive: 3R110PLUS V3.0
Voltage: 220VAC
Current: Rated
Micro-stepping: 2000

Wiring

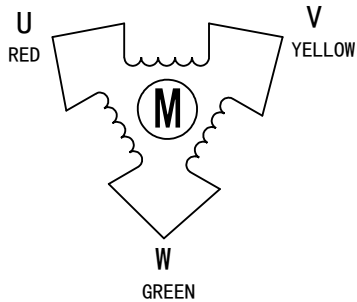


3-Phase Stepper Motor 110mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
110BM80	1.2	8.0	4.3	1.0	11.9	8600	19	40	137	5.5
110BM120	1.2	12	6.0	1.1	12.4	11900	19	40	161	7.1
110BM160	1.2	16	6.5	1.3	19.0	14800	19	40	185	10.7
110BM200	1.2	20	7.0	1.7	22.0	19800	19	40	220	11.0

*NEMA 42 (110mm)

110BM Series Dimension (mm)

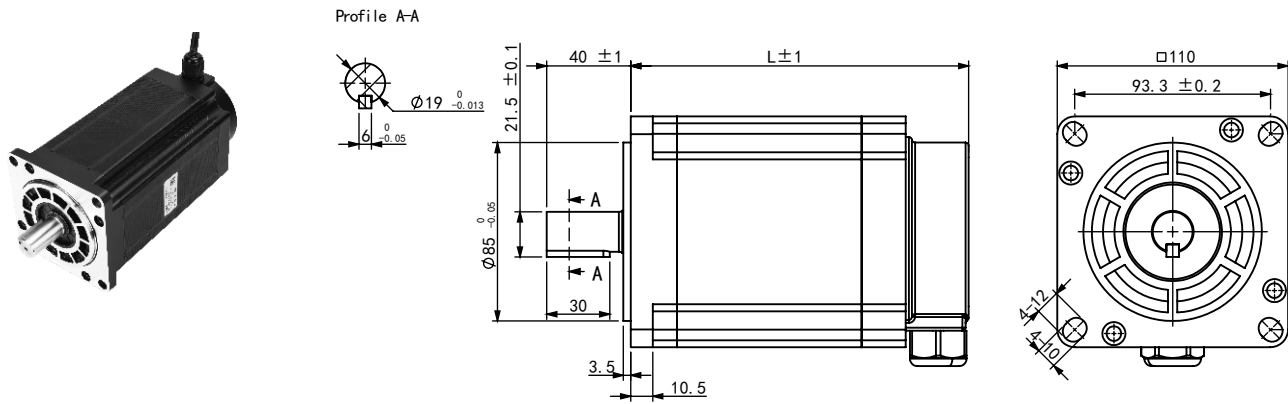


Torque-frequency Curve

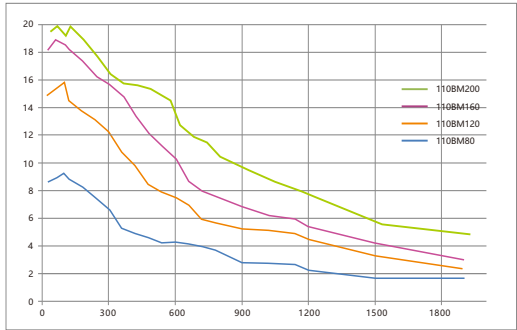

Drive: 3R110PLUS
Voltage: 220VAC
Current: Rated
Micro-stepping: 2000

Wiring

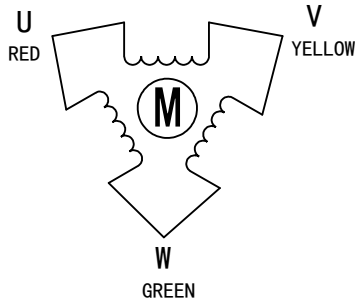


PE: Yellow-Green

3-Phase Stepper Motor 130mm Series Technical Specifications


Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
130B23	1.2	23	5.0	0.95	9.5	26800	19(K5)	45	170	13.7
130B36	1.2	36	5.0	1.30	13.1	35000	19(K5)	45	226	18.4
130B50**	1.2	50	5.0	1.70	18.0	45500	19(K5)	45	282	22.8
130B50**	1.2	50	6.0	0.99	18.3	42500	19(K6)	44	271	16.5

*NEMA 52 (130mm)
**We have two specifications of 130B50, Please confirm before ordering.


K5: 130B Series Dimension (mm)

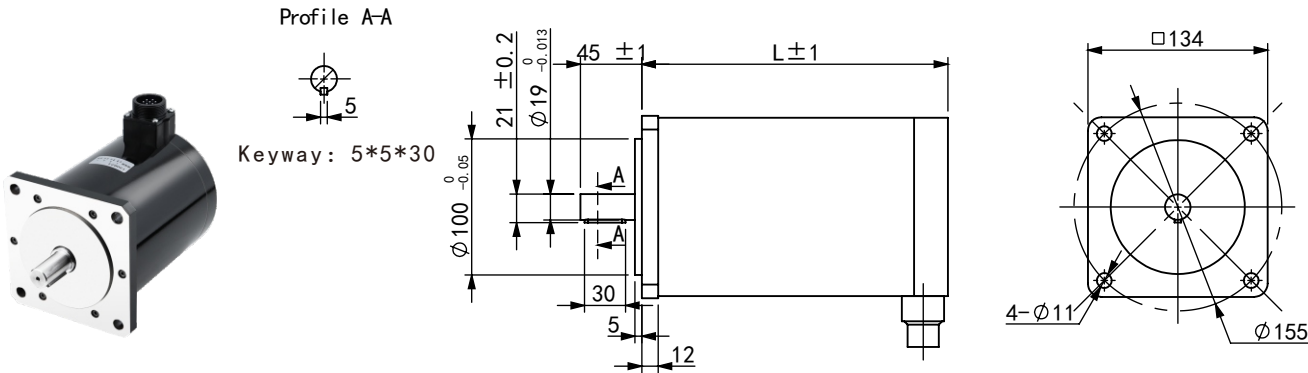

K6: 130B50 Series Dimension (mm)

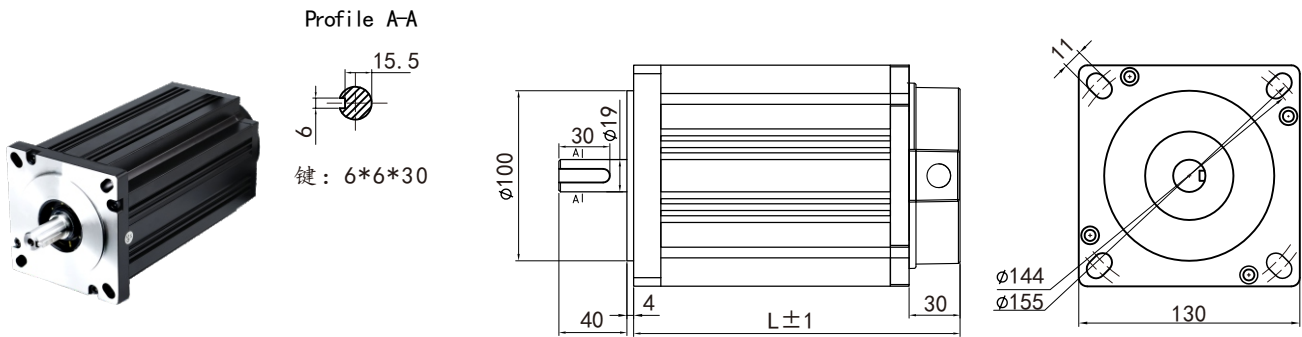


Torque-frequency Curve

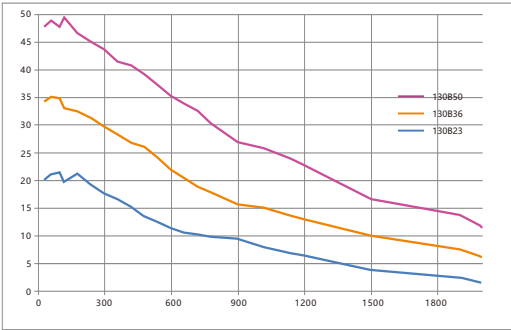

Drive: 3R130
Voltage: 220VAC
Current: Rated
Micro-stepping: 2000

Wiring

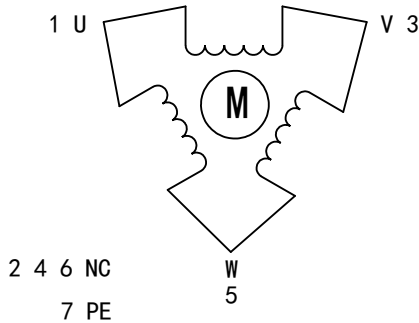


Reducer for Stepper Motor

Transmission Stepper Reducer


Model	Input dimension (Motor insertion end)				Output dimension (Client installation end)				Length	
	Shaft diameter	Boss diameter	Mounting hole distance	Mounting hole size	Shaft diameter	Boss diameter	Mounting hole distance	Mounting hole size	L1	L2
42PRF-□*	5	22	31.0	3.5	8	25	P.C.D.35	M4	43	53
57PLF-□*	8	38	47.1	M4	14	40	47.1	5.5	53	70
86PLF-□*	14	73	69.6	M6	14	73	69.6	M6	83	97

*PRF and PLF series reducer input terminal has size limitation, some stepper motors need to be cut shaft before assembly


42PRF Series Dimensions (mm)

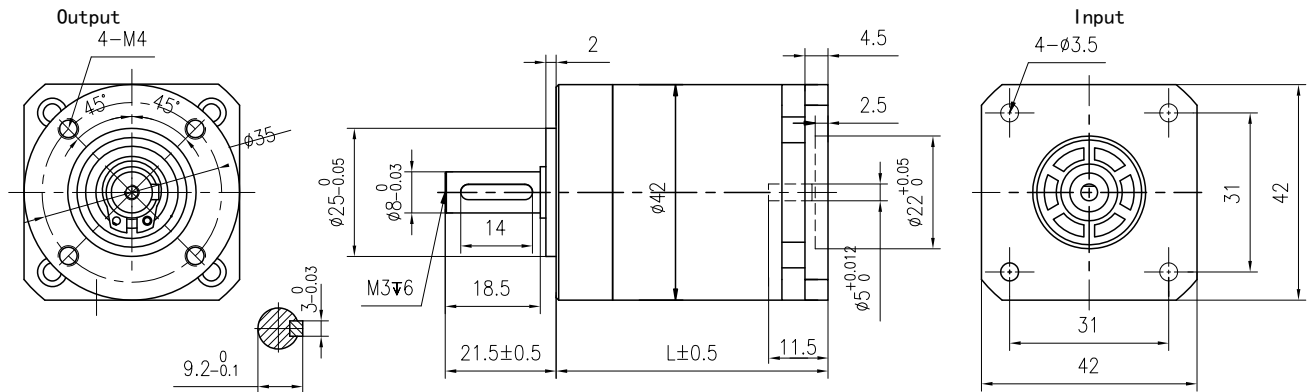

57PLF Series Dimensions (mm)

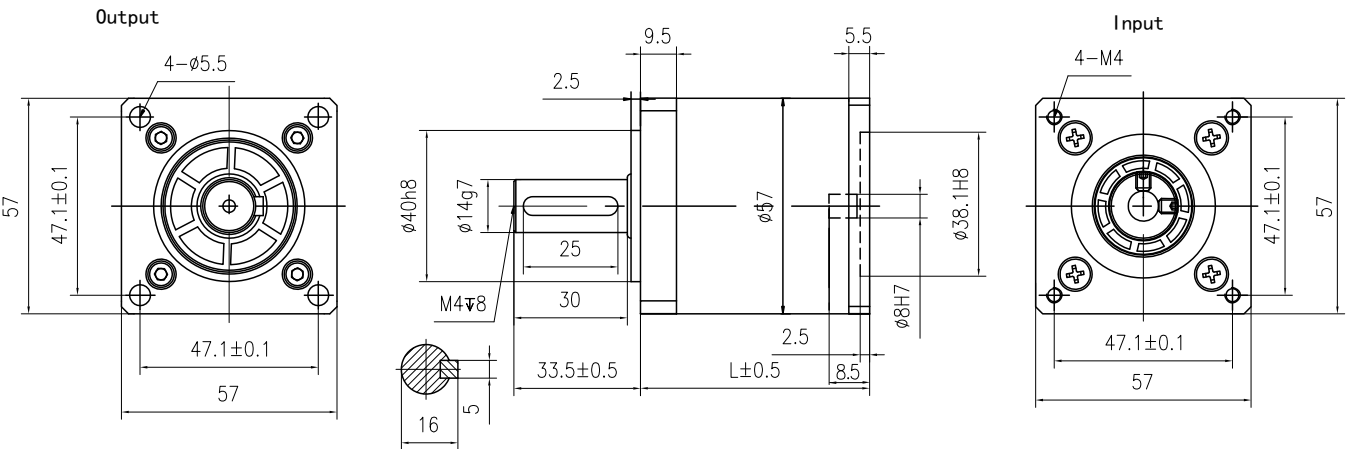

86PLF Series Dimensions (mm)

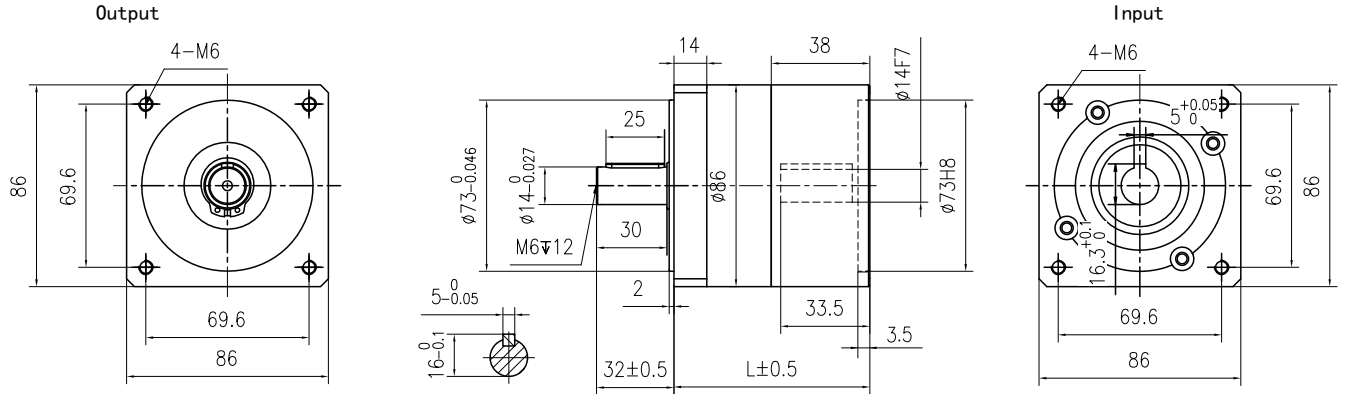


Precision Stepper Reducer


Model	Input dimension (Motor insertion end)				Output dimension (Client installation end)				Length	
	Shaft diameter	Boss diameter	Mounting hole distance	Mounting hole size	Shaft diameter	Boss diameter	Mounting hole distance	Mounting hole size	L1	L2
42PLX-□	5	22	31.0	3.5	10	35	P.C.D.50	3.5	62	77
60PLX-□	8	38	47.1	M4	14	50	P.C.D.70	5.5	77	95
90PLX-□	14	73	69.6	M6	20	80	P.C.D.100	6.5	110	130

*The L1 reducer can have a reduction ratio range of 3-10, the L2 reducer can have a reduction ratio range of 15-100.


42PLX Series Dimensions (mm)

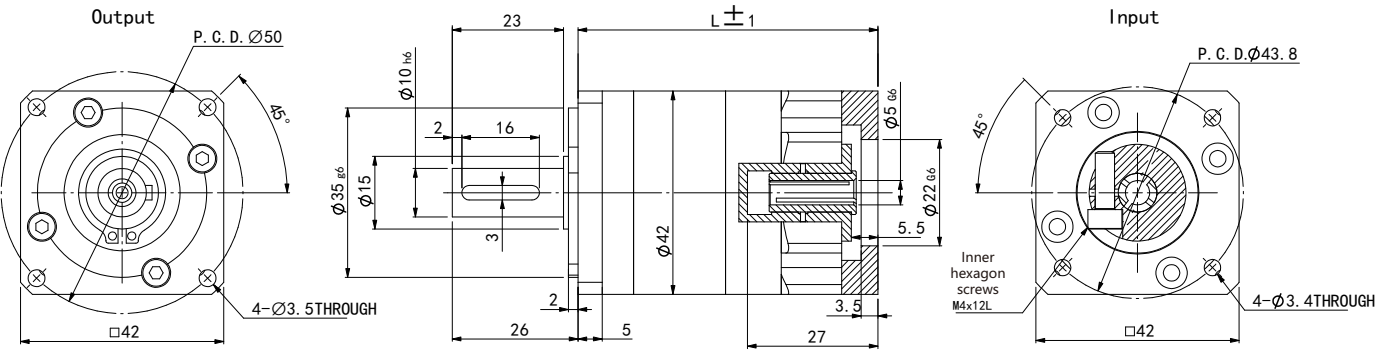

60PLX Series Dimensions (mm)

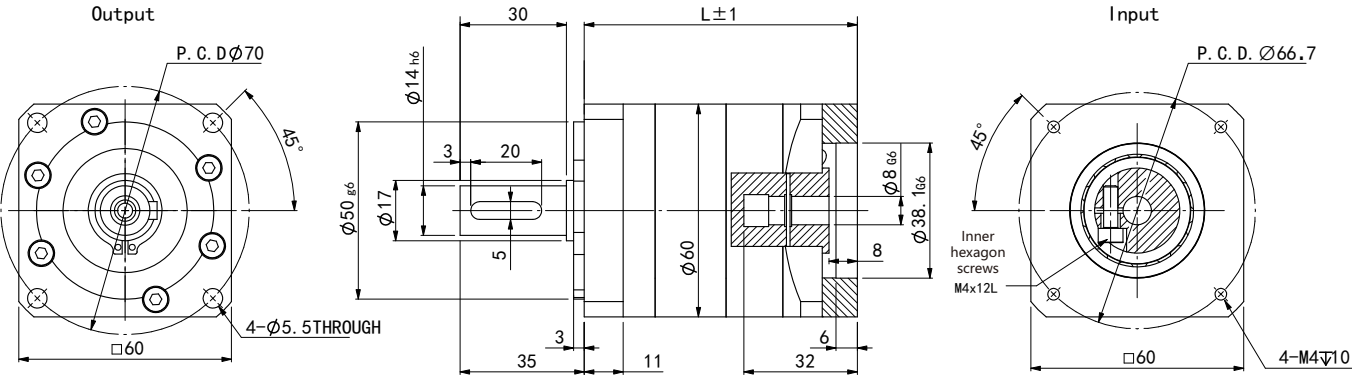


90PLX Series Dimensions (mm)

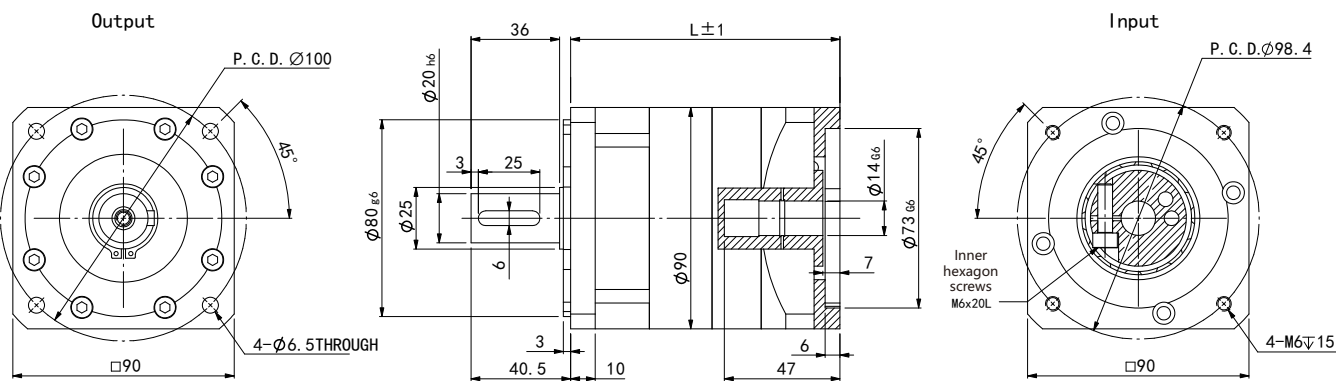

Five-phase Stepper System



Compared with the ordinary two-phase stepper motor, the five-phase stepper motor has a smaller step angle. In the case of the same rotor structure, the five-phase structure of the stator has unique advantages for the performance of the system.

The technical difficulty of the corresponding five-phase stepper drive lies in the demodulation of the electrical angle of the five-phase winding. The five-phase stepper drive, developed by Rtelligent, is compatible with the new pentagonal connection motor and has excellent performance.



Five-phase hybrid stepper motor structure diagram

Stepper Motor Stator Structure & Drive Control Diagram

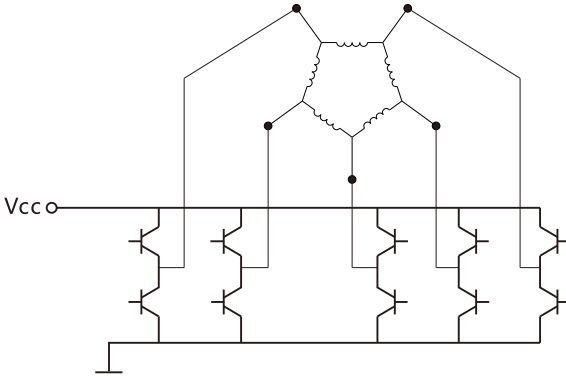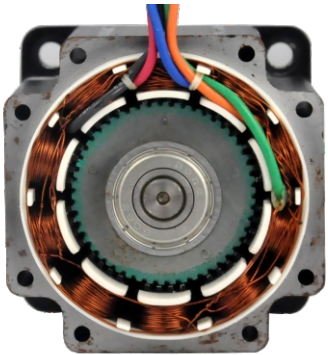


Features

Two-phase Five-phase


High precision

The step angle of the five-phase stepper motor is 0.72°, which has higher step angle accuracy than the two-phase/three-phase stepper motor.

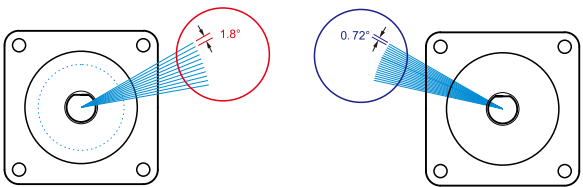


Low vibration

The stator of the five-phase stepper motor contains five pairs of windings. The decoupling algorithm of the drive makes the winding current of the five-phase stepper motor in a more reliable equilibrium state. The motor runs smoothly with little vibration.

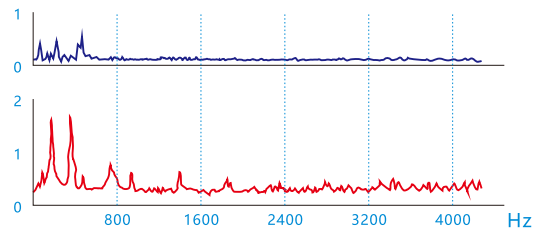


Small torque ripple

Because of its unique structure and current control algorithm, the five-phase stepper system has a smaller torque ripple in the same electrical cycle of the stepper motors. Therefore, the five-phase system has unique advantages in speed stability.

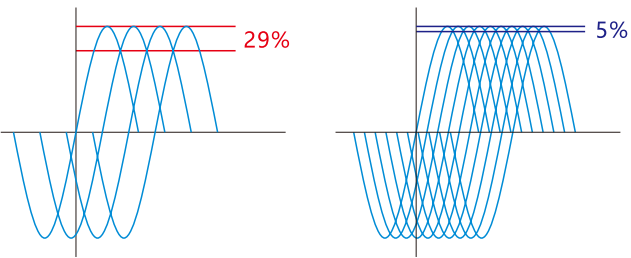

High repeat positioning accuracy

The step angle error of stepper motor depends on the manufacturing process, generally 3%-5% of the step angle. In each interval of 50 pairs of rotor cogging, the five-phase motor corresponds to 10 stable positions, which has better repeat positioning accuracy.

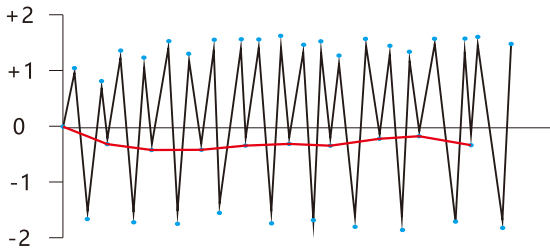


5R42

5R42 digital five-phase stepper drive is based on TI 32-bit DSP platform and integrated with the micro-stepping technology and the patented five-phase demodulation algorithm. With the features of low resonance at low speed, small torque ripple and high precision, it allows the five-phase stepper motor to deliver full performance benefits.

- Pulse mode: default PUL&DIR
- Signal level: 5V, PLC application requires string 2K resistor
- Power supply: 24-36VDC
- Typical applications: machanical arm, wire-cut electrical discharge machine, die bonder, laser cutting machine, semiconductor equipment, etc


Drive Interface & Connection

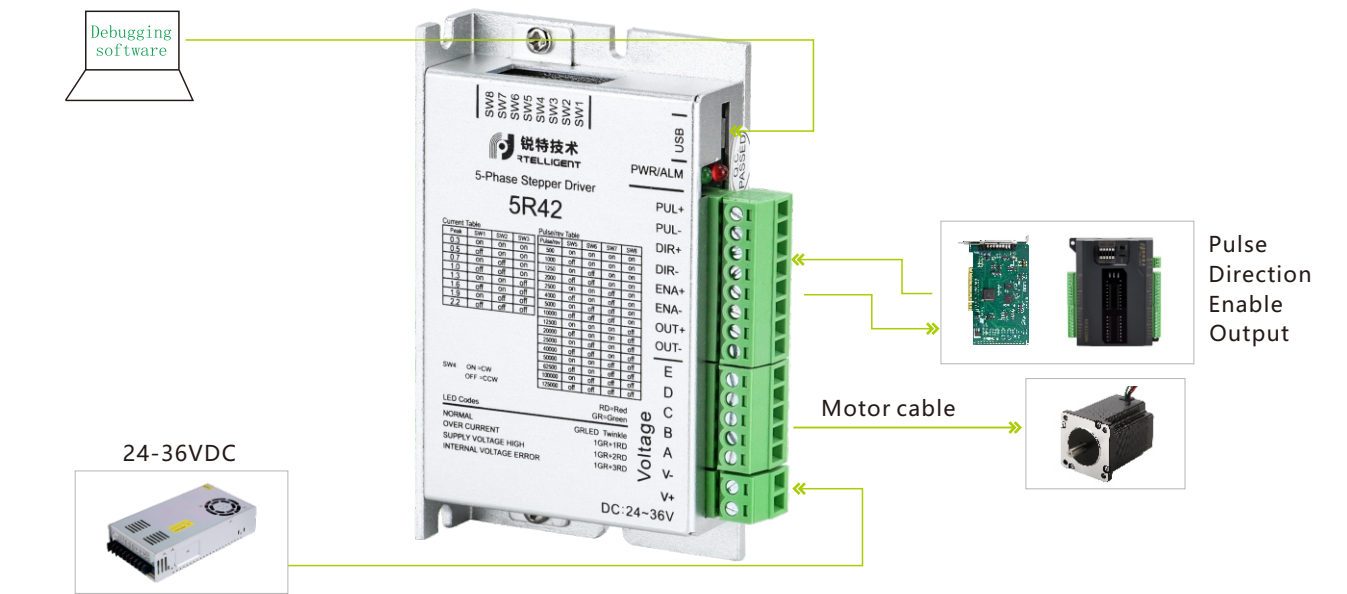

Working Current Setting

Output current	SW1	SW2	SW3
0.3A	on	on	on
0.5A	off	on	on
0.7A	on	off	on
1.0A	off	off	on
1.3A	on	on	off
1.6A	off	on	off
1.9A	on	off	off
2.2A	off	off	off

Installation Diemesion

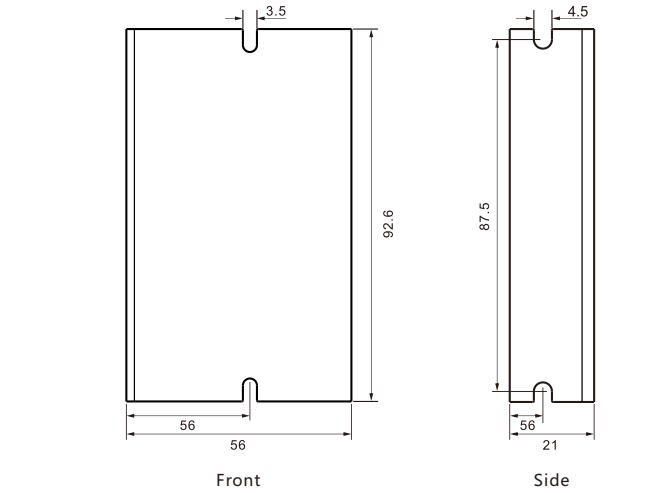

Initial Direction Setting

A	B	C	D	E
SW4	off	CW	on	CCW

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
500	on	on	on	on
1000	off	on	on	on
1250	on	off	on	on
2000	off	off	on	on
2500	on	on	off	on
4000	off	on	off	on
5000	on	off	off	on
10000	off	off	off	on
12500	on	on	on	off
20000	off	on	on	off
25000	on	off	on	off
40000	off	off	on	off
50000	on	on	off	off
62500	off	on	off	off
100000	on	off	off	off
125000	off	off	off	off


When 5, 6, 7, and 8 are all ON, any micro-stepping can be changed through the debugging software

5R60

5R60 digital five-phase stepper drive is based on TI 32-bit DSP platform and integrated with the micro-stepping technology and the patented five-phase demodulation algorithm. With the features of low resonance at low speed, small torque ripple and high precision, it allows the five-phase stepper motor to deliver full performance benefits.

- Pulse mode: default PUL&DIR
- Signal level: 5V, PLC application requires string 2K resistor.
- Power supply: 18-50VDC, 36 or 48V recommended.
- Typical applications: dispenser, wire-cut electrical discharge machine, engraving machine, laser cutting machine, semiconductor equipment, etc

Drive Interface & Connection

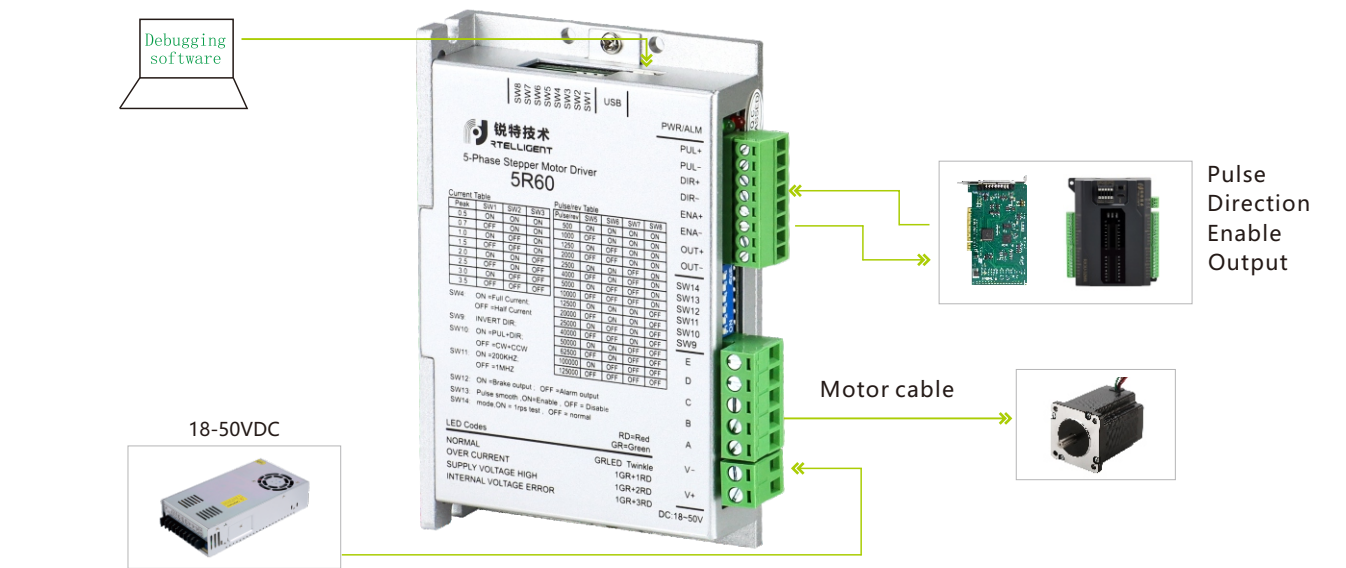


Working Current Setting

Output current	SW1	SW2	SW3
0.5A	on	on	on
0.7A	off	on	on
1.0A	on	off	on
1.5A	off	off	on
2.0A	on	on	off
2.5A	off	on	off
3.0A	on	off	off
3.5A	off	off	off

Initial Direction Setting

A	B	C	D	E
SW9	off	CW	on	CCW

Installation Diemesion

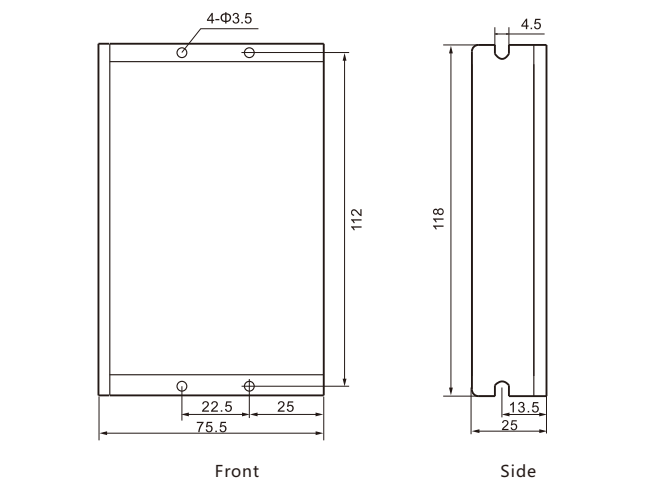

Function Setting Selection

Pulse mode	SW10
off	CW+CCW
on	PUL+DIR
Max pulse frequency	SW11
off	Max pulse 1MHz
on	Max pulse 200KHz
Output function	SW12
off	Alarm output
on	Break control output
Filter function	SW13
off	Ineffective
on	Effective
Self-check	SW14
off	Normal mode
on	self-check operation

Micro-stepping Setting

Pulse/rev	SW5	SW6	SW7	SW8
500	on	on	on	on
1000	off	on	on	on
1250	on	off	on	on
2000	off	off	on	on
2500	on	on	off	on
4000	off	on	off	on
5000	on	off	off	on
10000	off	off	off	on
12500	on	on	on	off
20000	off	on	on	off
25000	on	off	on	off
40000	off	off	on	off
50000	on	on	off	off
62500	off	on	off	off
100000	on	off	off	off
125000	off	off	off	off


When 5, 6, 7, and 8 are all ON, any micro-stepping can be changed through the debugging software

5ECR42

The 5ECR42 series is a high performance bus controlled five-phase stepper motor driver, while integrating the function of intelligent motion controller, 5ECR42 driver can be used as standard EtherCAT runs from the station, the data transmission speed can reach 100Mb/s, supports a variety of network topologies such as linear and ring, and match to the five-phase stepper motor below 60.

- Power supply: 24-36V DC power supply
- Optical isolation input: 4 common-anode 24V input
- Photoelectric isolation output: 2 photoelectric isolation output (alarm, lock, in place and universal output)
- Typical applications: dispensing machine, wire cutting, engraving machine, laser cutting machine, semiconductor equipment, etc


Drive interface & Connection

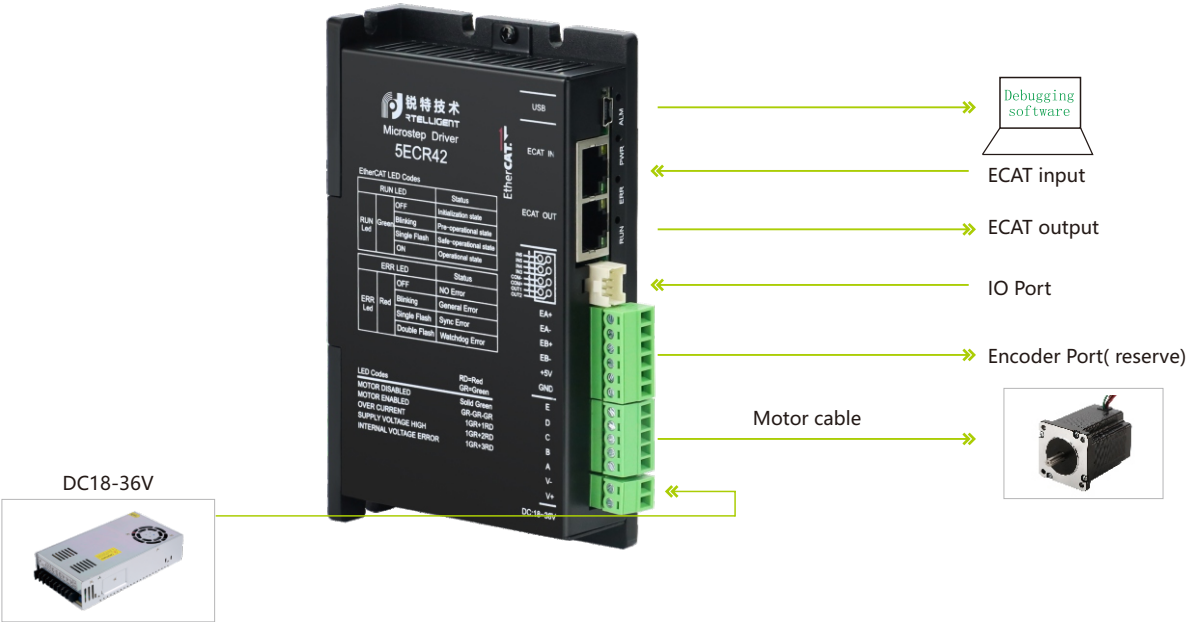

Function Setting

Input Port		
Input 1	IN1+	Differential input signal 5V level input
	IN1-	
Input 2	IN2+	Single-ended common positive input Default function: Positive limit
	IN2-	
Input 3	IN3	Negative limit IN5 origin
Input 4	IN4	
Input 5	IN5	Input common terminal
Input 6	IN6	
	COM+	
Internal power output interface		
	+5V	Internal 5V power output
	GND	Supply current 80mA
Output interface		
Output 1	OUT1	Single ended common negative output
Output 2	OUT2	
	COM-	Output common terminal

Installation Diemesion

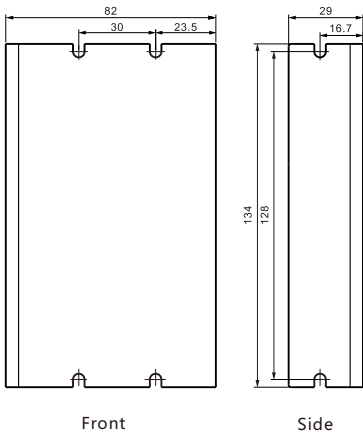


5ECR42-ACM

The 5ECR42-ACM is a high-performance EtherCAT bus controlled five-phase stepper motor driver for controlling five-phase stepper motors with new pentagonal connections. The product has a smaller size, which saves a lot of space and is easy for customers to design.

- Power supply: 18-36VDC
- Digital input port: 4 photoelectric isolated digital signal input
- Digital output port: 2 photoelectric isolated digital signal output
- Analog interface: 2 channels; Voltage range: 0~10V; Used to connect common sensors such as pressure gauges
- Typical applications: dispensing machine, wire cutting, engraving machine, laser cutting machine, semiconductor equipment, etc


Drive interface & Connection

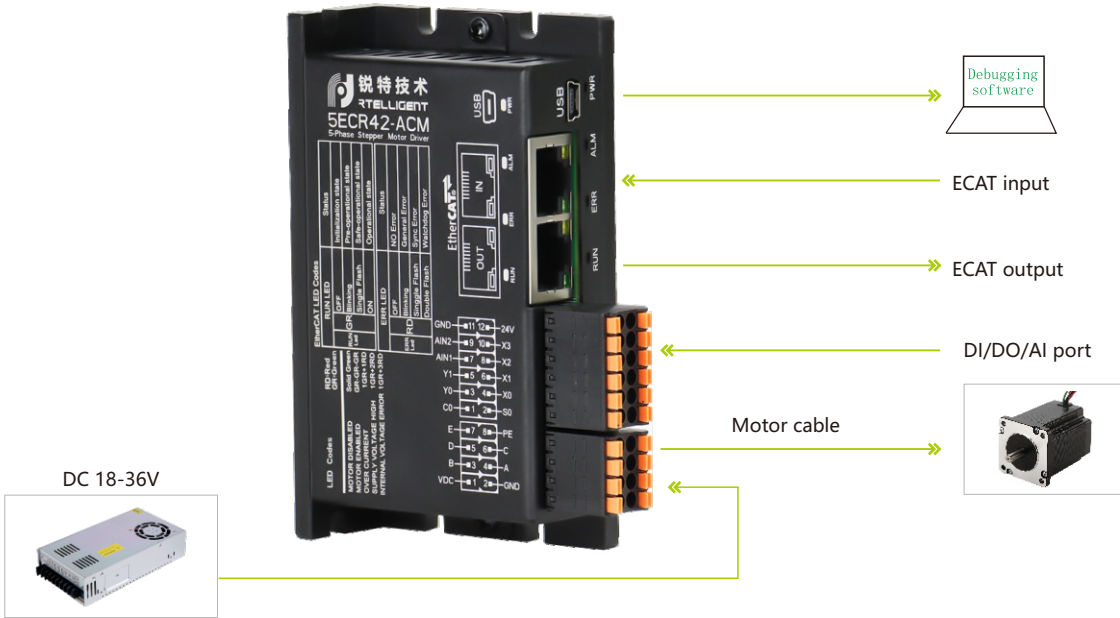

Function Setting

DI/DO/AI port		
1	SS	The common end of the digital isolation input signal, the NPN input is connected to 24V, the PNP input is connected to 0V
2	C0	Digital isolation output signal common end, connected to 0V
3、5	X0、X1	4 channels of digital input signal
7、9	X2、X3	
4、6	Y0、Y1	2-channel analog signal input
8、10	AIN1、AIN2	Analog grounding
12	GND	Analog signal 24V
11	24V	
Power Supply and Motor Interface		
1	GND	Power input terminal, VDC is connected to the positive power terminal, GND is connected to the negative power terminal; Voltage range 18-30VDC
2	VDC	
3	A	Five-phase stepper motor winding connection port. When the motor running direction is opposite to the actual demand, it is recommended that the customer set to 1 by 0x200D, perform reversal operation
4	B	
5	C	
6	D	
8	E	
7	PE	Safety grounding


Installation Diemesion

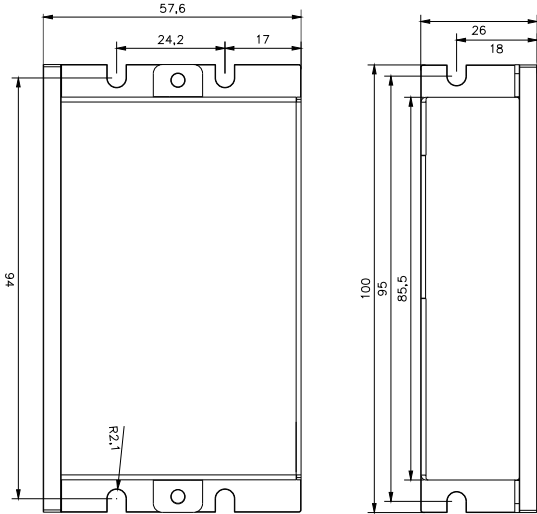


■ Technical Specifications

Model	Step angle (°)	Holding torque(N.m)	Rated current(A)	Resistance/Phase(Ohm)	Inductance/Phase(mH)	Rotor inertia (g.cm ²)	Shaft diameter(mm)	Shaft length (mm)	Length (mm)	Weight (kg)
42C03	0.72	0.3	0.75	1.9	1.6	68	5	24	48	0.3
60C1	0.72	1.0	1.5	0.5	1.2	380	8	21	64	0.9
60C2	0.72	1.3	1.5	3.6	9.7	550	8	21	76	1.1


■ NEMA 17(42mm) Series Dimensions

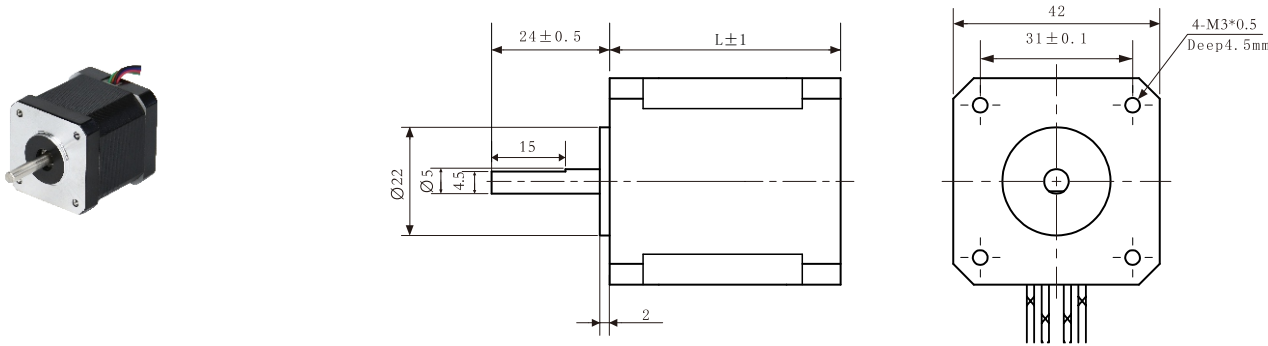


■ NEMA 24(60mm) Series Dimensions (mm)

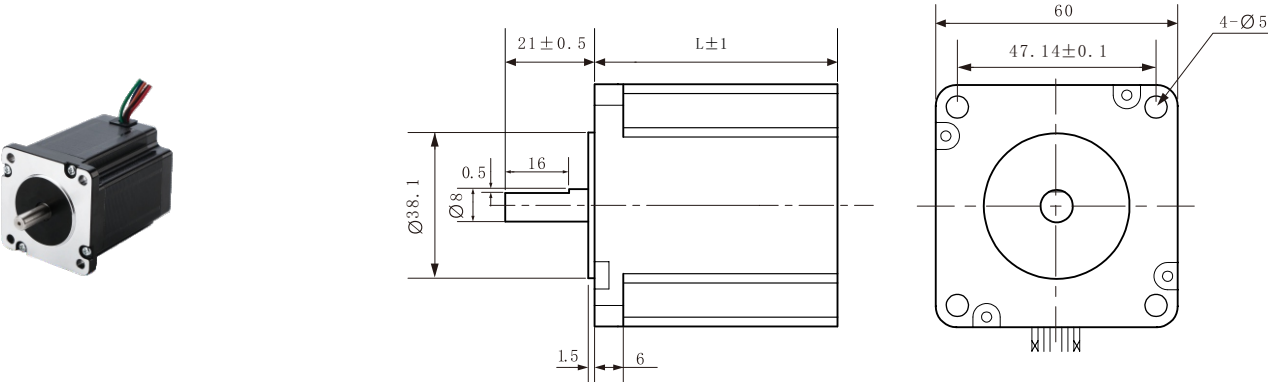

■ Torque-frequency Curve

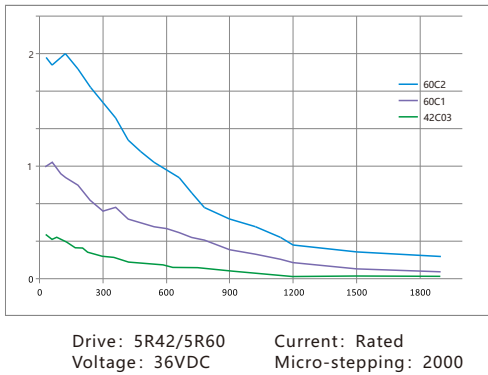

■ Wiring

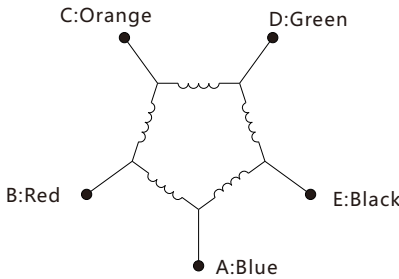

Linear Stepper Motor

External Nut ACME Screw	External Nut Ball Screw	Non-Captive ACME Screw
-------------------------	-------------------------	------------------------

- Inch T-shape screw, anti-backlash nuts are optional
- Recommended speed range 300rpm
- Screw transmission efficiency 20-50%
- Brake and closed loop are optional

- Rolling ball screw, C7 precision
- Recommended speed range 700rpm (closed loop 1500rpm)
- Screw transmission efficiency 90-98%
- Brake and closed loop are optional

- Inch T-shape screw
- Recommended speed range 300rpm
- Screw transmission efficiency 20-50%
- Brake and closed loop are not optional

■ Naming Rule

57A09 E C - Z - GZ1210 - 3 - 140 - 001

1 2 3 4 5 6 7 8

1 Motor model

2 Shaft mode
N: Non-Captive
E: External Nut

3 Encoder code
C: With encoder
None: Omitted

4 Break code
Z: With break
None: Omitted

5 Screw type & lead
Gz1210: Ball screw, 10mm lead, 12mm diameter
5.08: ACME screw, 5.08mm lead, diameter omitted

6 Rated motor current
Unit: mm

7 Screw length
Unit: mm

8 Customized Code

*Model naming rules are only used for model meaning analysis. For specific optional models, please consult with our engineer.

■ Technical Specifications

Screw type	Motor frame	Optional motor body length					Optional diameter	Optional lead					
ACME	20	30	42				3.5	1	2	4	8		
	28	34	45				4.76	0.635	1.27	2.54	5.08	10.16	
	35	34	47				6.35	1.27	2.54	6.35	12.7	25.4	
	42	34	40	48	60		6.35	1.27	2.54	6.35	12.7	25.4	
	57	45	55	65	75		9.525	1.27	2.54	5.08	10.16	25.4	
Ball	86	76	114				15.875	2.54	3.175	6.35	12.7	25.4	
	20	30	42				6	1					
	28	34	45				8	1	2				
	35	34	47				8	1	2				
							12	2	5	10			
	42	34	40	48	60		8	1	2				
							12	2	5	10			
	57	45	55	65	75		12	2	5	10			
	86	76	114				16	5	10	16			

■ Concepts

Lead: The lead is the linear stroke of the screw when it rotates the nut for one circle.

Thrust: Thrust refers to the thrust generated by the motor in the shaft direction of screw. When selecting, the screw thrust should be greater than the sum of the external forces of the current load.

Thrust formula: $T \cdot 2\pi \cdot \eta = F \cdot B$
T: Effective torque
Q: Screw transmission efficiency
F: Thrust
B: Lead

Screw: The ball screw uses the cyclic movement of the ball between the nut and the screw to move the load.
T-shape screw uses the oil film between the nut and the screw to generate relative sliding to move the load.

Screw type	Friction form	Friction coefficient	Transmission efficiency	Self-locking force	Motor speed
Ball screw	Rolling friction	Small	High	No	High
T-shape screw	Sliding friction	Large	Low	Has a certain selflocking force	Speed limit 300rpm

■ Model Selection

- 1 Determine the load specifications and stroke
Dimension and weight of workpieces and loads, also the motion range of workpieces
- 2 Determine the static stress condition of the loads according to its installationEg.
eg: Calculate gravity and friction if installed vertically.
Calculate friction if installed horizontally.
Other forces should be considered as well.
- 3 Select the proper size of linear screw motor based on speed and the screw specifications table.
Estimate static torque based on static stress condition of the system.
Estimate dynamic torque based on accelerated speed and inertia
Approximately determine the condition of the motor body and screw lead.
(Remarks: the transmission efficiency of ACME screw is 20%-60%)
- 4 Select the matching drive

Pluse type

Switching type

Fieldbus type

Cable Accessory

■ Stepper Encoder Cable

B1-030



EB+	EB-	EA+	EA-	VCC	GND
GRN	YEL	BRN	WHT	RED	BLU

Matching products: ED series closed-loop stepper motor

C1-030



EB+	EB-	EA+	EA-	VCC	GND
GRN	YEL	BRN	WHT	RED	BLU

Matching products: EC series closed-loop stepper motor

■ Z Signal Encoder Extension Cable

CES8-030



EB+	EB-	EA+	EA-
GRN	GRN&BLK	BLU	BLU&BLK

VCC	GND	EZ+	EZ-
RED	BLK	YEL	YEL&BLK

Matching products: ECZ series closed-loop stepper motor

■ Stepper Motor Power Extension Cable

C2-030



A+	A-	B+	B-
RED	BLU	GRN	BLK

Matching products: Stepper series

■ RS232 Interface Tuning Cable

RS232

Matching products: T42,T60, T86,R60X3,R130,3R130



■ MiniUSB Interface Tuning Cable

MINI USB

Matching products:
RS series, DRV series, T60PLUS



■ Network Cable (Short)

E0035

Matching products: EtherCAT series



Common Model Quick Selection Table

Open Loop Stepper Drive

Model	Matching motor*	Control mode	Power supply voltage	External debug interface	Notes
R42	42 series open loop	Pulse control	18-50VDC	MicroUSB	
R57	57 series open loop	Pulse control	18-50VDC	-	
R57-HV	57 series open loop	Pulse control	18-70VDC	-	
R60	60 series open loop	Pulse control	18-50VDC	-	
R60-1M	60 series open loop	Pulse control	18-50VDC	-	Pulse bandwidth 1M
R60-AL	60 series open loop	Pulse control/IO control	18-50VDC	MicroUSB	24V pulse only
R60-AL-5V	60 series open loop	Pulse control/IO control	18-50VDC	MicroUSB	5V pulse only
R85	86 series open loop	Pulse control	20-60VAC/24-80VDC	-	
R86	86 series open loop	Pulse control	18-80VAC/24-100VDC	-	
R86mini	86 series open loop	Pulse control/IO control	18-80VAC/24-100VDC	MicroUSB	
R110PLUS v3.0	86/110 series open loop	Pulse control/IO control	110-220VAC	TTL	
R130	130 series open loop	Pulse control	110-220VAC	RS232	
R60-CCW	60 series open loop	Pulse control	18-50VDC	-	CW&CCW
3R60	3 phase 60series open loop	Pulse control	18-50VDC	-	
3R110PLUS v3.0	3 phase 86/110 series open loop	Pulse control	110-220VAC	TTL	
3R130	3 phase 130 series open loop	Pulse control	110-220VAC	RS232	
R42-IO	42 series open loop	IO control	18-50VDC	-	
R57-IO	57 series open loop	IO control	18-50VDC	-	
R60-IO	60 series open loop	IO control	18-50VDC	-	
R86-IO	86 series open loop	IO control	18-80VAC/24-100VDC	-	
R110PLUS-IO	110 series open loop	IO control	110-220VAC	MicroUSB	
R130-IO	130 series open loop	IO control	110-220VAC	RS232	
R42-IR	42 series open loop	IO control	18-50VDC	-	Potentiometer speed regulation
R57-IR	57 series open loop	IO control	18-50VDC	-	
R60-IR	60 series open loop	IO control	18-50VDC	-	
R42-D	42 series open loop	IO control	18-50VDC	-	One Drive Two
R60-D	60 series open loop	IO control	18-50VDC	-	One Drive Two
R60-IRD	60 series open loop	IO control	18-50VDC	-	One Drive Two
R42X2	42 series open loop	Pulse control	18-50VDC	-	Biaxial, 24V pulse only
R42X2-5V	42 series open loop	Pulse control	18-50VDC	-	Biaxial, 5V pulse only
R60X2	60 series open loop	Pulse control	18-50VDC	-	Biaxial, 24V pulse only
R60X2-5V	60 series open loop	Pulse control	18-50VDC	-	Biaxial, 5V pulse only
R60X3	60 series open loop	Pulse control	18-50VDC	RS232	Triaxial
NT60	60 series open loop	Pulse control/IO control/RS485	18-50VDC	RS485	
NT86	86 series open loop		18-80VAC/24-100VDC	RS485	
NT86-C	86 series open loop		18-80VAC/24-100VDC	RS485	
EPR60	60 series open loop	TCP	18-50VDC	TCP/IP	
ECR42	42 series open loop	EtherCAT	18-50VDC	EtherCAT	
ECR60	57/60 series open loop	EtherCAT	18-50VDC	EtherCAT	
ECR60X2A	57/60 series open loop	EtherCAT	18-50VDC	EtherCAT	Biaxial
ECR86	86 series open loop	EtherCAT	18-80VAC/24-100VDC	EtherCAT	

*The matching motor specification is for reference only, smaller motor is also compatible.

Open Loop Stepper Motor

Motor base	Model	Rated torque (N.M)	Rated current (A)	Matching drive	Shaft diameter* (mm)	Shaft length (mm)	Length (mm)	Notes
20	20AM003	0.03	0.6	R42	G4	10	33	
	20AM005	0.05	0.6		G4	10	45	
28	28AM006	0.06	1.2		D5	20	32	
	28AM01	0.10	1.2		D5	20	41	
	28AM013	0.13	1.2		D5	20	51	
35	35A02	0.2	1.0		D5	20	34	
39	39A02	0.2	1.0		D5	20	36	
42	42AM02	0.2	1.5		D5	24	34	
	42AM04	0.4	1.5		D5	24	40	
	42AM06	0.6	2.0		D5	24	47	
	42AM06-Z2	0.6	2.0		D5	24	78	Brake
	42AM08	0.8	2.0		D5	24	60	
	42AM08-Z2	0.8	2.0		D5	24	91	Brake
	42A01	0.15	1.0		D5	24	34	
	42A02	0.2	1.2		D5	24	40	
	42A03	0.3	2.0		D5	24	47	
	42A08	0.8	2.0		D5	24	60	
57	57AM13	1.3	3.0	R60	D8	21	55	
	57AM13-6.35	1.3	3.0		D6.35	21	55	
	57AM23	2.3	5.0		D8	21	76	
	57AM23-6.35	2.3	5.0		D6.35	21	76	
	57AM24	2.4	5.6		D8	21	80	
	57AM24-Z2	2.4	5.6		D8	21	124	Brake
	57AM26	2.6	5.0		D8	21	84	
	57AM30	3.0	5.0		D8	21	102	
	57AM30-Z2	3.0	5.0		D8	21	146	Brake
	57A09	0.9	2.8		D6.35	21	55	
	57A09-8	0.9	2.8		D8	21	55	
	57A1	1.3	2.8		D6.35	21	76	
	57A1-8	1.3	2.8		D8	21	76	
	57A1S8D	1.3	2.8		D8	21	76	Biaxial
	57A2	2.2	4.0		D8	21	80	
	57A3	3.0	5.0		D8	21	102	
D57	D57AM30	3.0	5.0		D8	21	86	
60	60AM21	2.1	5.0		D8	21	58	
	60AM30	3.0	5.0		D8	21	86	
	60AM30-Z2	3.0	5.0		D8	21	125	Brake
	60AM40	4.0	5.0		D10	30	102	

*G-Plain shaft, D-Single flat, K-Keyed

■ Open Loop Stepper Motor

Motor base	Model	Rated torque (N.M)	Rated current (A)	Matching drive	Shaft diameter* (mm)	Shaft length (mm)	Length (mm)	Notes
86	86AM35	3.5	4.0	R86	D9.5	32	64	
	86AM45	4.5	6.0		D12.7	32	78	
	86AM45-14	4.5	6.0		K14	32	78	
	86AM45-Z2	4.5	6.0		K14	32	123	Brake
	86AM65	6.5	6.0		K12.7	32	98	
	86AM65-14	6.5	6.0		K14	32	98	
	86AM85	8.5	6.0		K12.7	32	112	
	86AM85-14	8.5	6.0		K14	32	112	
	86AM85-Z2	8.5	6.0		K14	32	157	Brake
	86AM100	10	6.0		K14	32	128	
	86AM120	12	6.0		K15.875	32	155	
	86AM120-14	12	6.0		K14	32	155	
	86AM120-Z2	12	6.0		K14	32	199	Brake
110	110A12	12	6.0	R110PLUS	K19	56	115	
	110A20	20	6.0		K19	56	150	
	110A28	28	6.5		K19	56	201	
130	130A27	27	6.0	R130	K19	45	226	
	130A45	45	7.0		K19	45	283	

*G-Plain shaft, D-Single flat, K-Keyed

■ Closed Loop Stepper Drive

Model	Matching motor*	Control mode	Power supply voltage	External debug interface	Notes
T42	42 series closed loop	Pluse control	18-50VDC	RS232	
T60	57/60 series closed loop	Pluse control	18-50VDC	RS232	
T60-IO	60 series closed loop	IO control	18-50VDC	RS232	
T60-1M	60 series closed loop	Pluse control	18-50VDC	RS232	Pulse bandwidth 1M
T60-SC	60 series closed loop	Pluse control	18-50VDC	RS232	With brake output
T60PLUS v3.0	60 series closed loop	Pluse control	18-50VDC	mini USB	Z signal interface
T86	86 series closed loop	Pluse control	18-80VAC/24-100VDC	RS232	
T86-IO	86 series closed loop	IO control	18-80VAC/24-100VDC	RS232	
3T60	3 phase 60 series closed loop	Pluse control	18-50VDC	RS232	
3T60PLUS v3.0	3 phase 60 series closed loop	Pluse control	18-50VDC	mini USB	Z signal interface
NT60	60 series closed loop	Pluse control/IO control/RS485	18-50VDC	RS485	
NT86	86 series closed loop	Pluse control/IO control/RS485	18-80VAC/24-100VDC	RS485	
NT86-C	86 series closed loop	CANopen	18-80VAC/24-100VDC	RS485	
DS86	86 series closed loop	Pluse control	18-80VAC/24-100VDC	microUSB	Digital display screen
EPT60	60 series closed loop	TCP	18-50VDC	TCP/IP	
ECT42	42 series closed loop	EtherCAT	18-50VDC	EtherCAT	
ECT60	57/60 series closed loop	EtherCAT	18-50VDC	EtherCAT	
ECT60X2	57/60 series closed loop	EtherCAT	18-50VDC	EtherCAT	Biaxial
ECT86	86 series closed loop	EtherCAT	18-80VAC/24-100VDC	EtherCAT	

*The matching motor specification is for reference only, smaller motor is also compatible.

■ Closed Loop Stepper Motor

Motor base	Model	Rated torque (N.M)	Rated current (A)	Matching drive	Extension cord*	Shaft diameter* (mm)	Shaft length (mm)	Length (mm)	Notes	
20	20AM003EC	0.03	0.6	T42	Encoder cable	G4	20	46		
28	28AM006EC	0.06	1.2		C1-030	D5	20	45		
	28AM013EC	0.13	1.2			D5	20	64		
	42A03EC	0.3	2.0		Powerline C2-030**	D8	21	69		
	42A08EC	0.8	2.8			D8	21	85		
42	42AM06ED	0.6	2.0		Encoder cable B1-030	D5	24	67		
	42AM06ED-Z2	0.6	2.0			D5	24	98	Brake	
	42AM06ED-8	0.6	2.0			D8	24	67		
	42AM08ED	0.8	2.0			D5	24	79		
	42AM08ED-Z2	0.8	2.0		Powerline C2-030**	D5	24	110	Brake	
	42AM08ED-8	0.8	2.0			D8	24	79		
	42AM08ED-8-Z2	0.8	2.0			D8	24	110	Brake	
57	57AM13ED	1.3	4.0	T60	Encoder cable B1-030	D8	22	77		
	57AM23ED	2.3	5.0			D8	22	98		
	57AM24ED-Z2	2.3	5.0			D8	22	142	Brake	
	57AM26ED	2.6	5.0			D8	22	106		
	57AM30ED	3.0	5.0			D8	22	124		
	57AM30ED-Z2	3.0	5.0			D8	22	168	Brake	
D57	D57AM30ED	3.0	5.0		Powerline C2-030**	D8	22	107		
60	60AM22ED	2.2	5.0			D8	22	79		
	60AM30ED	3.0	5.0			D8	22	107		
	60AM30ED-Z2	3.0	5.0			D8	22	150	Brake	
	60AM40ED	4.0	5.0			D10	30	123		
86	86AM45ED	4.5	6.0		T86	Encoder cable B1-030	K14	40	105	
	86AM45ED-Z2	4.5	6.0				K14	40	151	Brake
	86AM65ED	6.5	6.0				K14	40	127	
	86AM85ED	8.5	6.0				K14	40	140	
	86AM85ED-Z2	8.5	6.0			Powerline C2-030**	K14	40	185	Brake
	86AM100ED	10	6.0				K14	40	157	
	86AM120ED	12	6.0				K14	40	182	
	86AM120ED-Z2	12	6.0				K14	40	228	Brake
42	42AM06ECZ	0.6	2.0	T60PLUS	Encoder cable CES8-030	D5	24	67	Z signal	
	42AM08ECZ	0.8	2.0			D5	24	79		
57	51A1ECZ	1.3	4.0			D8	22	76		
	57A2ECZ	2.0	3.5			D8	22	98		
	57A3ECZ	3.0	5.0			D8	22	123		
60	60A3ECZ	3.0	5.0			Powerline C2-030**	D8	22		110
86	86AM45ECZ	4.5	6.0	T86	K14		40	105		
	86AM100ECZ	10	6.0		K14		40	157		
	86A12ECZ	12	6.0		K14		40	176		

*The standard length of the extension cable is 3 meters, if you need other sizes, please specify when ordering

**Power line C2 is an optional model, if necessary, please specify when ordering

***G-Plain shaft, D-Single flat, K-Keyed

| Global Sales & Service Network

