


图号/DWG NO.	86HS155-K1432-BZ
------------	------------------

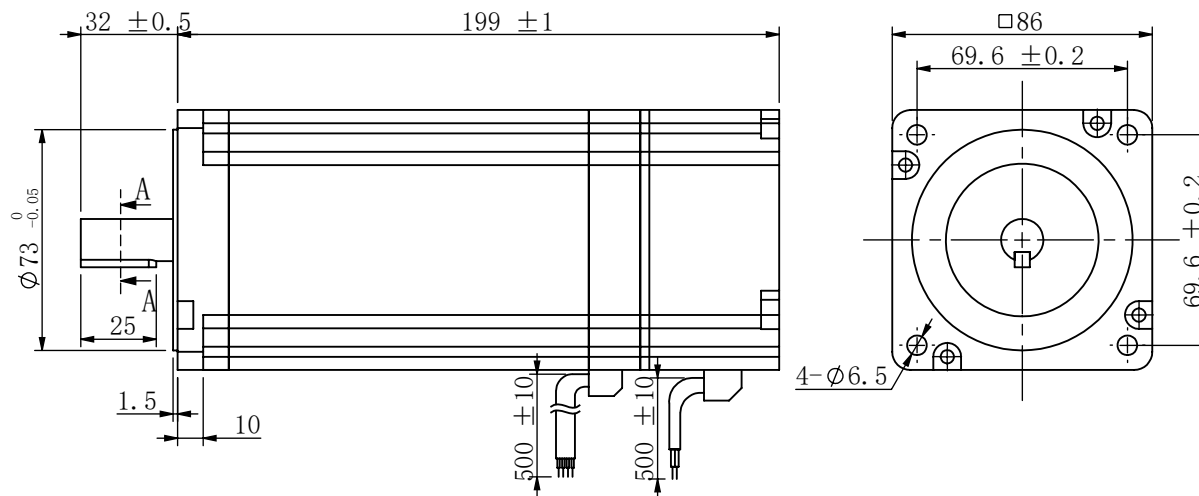

励磁顺序(2相励磁)VS. 旋转方向
EXCITING SEQUENCE(TWO PHESES)
VS. DIRECTION OF ROTATION

电压	24V DC
脱力扭矩	8.3N·M
功率	4.3W
最高转速	1K RPM
响应时间	50ms
绝缘等级	CLASS B
黑色	负极
红色	正极

	STEP	A+	B+	A-	B-
CW ↓ ↑ CCW	1	+	+	-	-
	2	-	+	+	-
	3	-	-	+	+
	4	+	-	-	+

从安装面看为顺时针方向
CLOCKWISE VIEW FROM MOUNTING SIDE

1. 额定电流, 两相同时通电/AT RATED CURRENT, TWO PHASES ON.
2. 热阻法: 电机安装在84*84*15的铝板上, 电机线圈两端通额定电压, OPSS /MEASURED BY RESISTANCE METHOD. MOUNT WITH ALUMINUM HEAT SINK 84*84*15 AT TWO WINDING BE EXCITED BY RATED VOLTAGE, OPSS, 2PHASE ON.
3. 寿命测试条件: 整步, 运行速度为500PPS, 轴承的表面温度不超过70° C
LIFE TEST CONDITION: 2PHASE EXCITING, FULL STEP, AT 500PPS. STARTING PULSE, BEARING TEMPERATURE SHOULD BE 70° C MAX.

CONFIRMED&ACCEPTED BY CUSTOMER (客户确认&接受)													
COMPANY CHOP&SIGNATURE (盖章&签名)													
一般公差 TOLERANCE		±0.3/±3°	版本 REV.	年 月 日 DATE	变更番号 ECR NO.	变 更 内 容 REVISIONS			设计 BY	备注 NOTE	REV.	A	
设计/DESIGNED		30700			比例 SCALE		型 号/MODEL 86AM120-Z2					三维图 THIRD ANGL PROJECTION	
审核/CHECKED		潘国强			单位 UNIT	mm						第三角 THIRD ANGL PROJECTION	
深圳锐特机电技术有限公司										页 SHEET	1/1		